



SPECIFICATION

61204X-X 2-Ball Piston Pump & Packages

Ratio 1:1

Stroke 2"

Material Inlet Immersed

Material Outlet 3/4" NPT(F)

Air Inlet (female) 1/4" NPT(F)

Air Inlet Pressure Range psi (bar) 0 – 150 (0 – 10.3)

Fluid Pressure Range psi (bar) 0 – 150 (0 – 10.3)

Max Cycles/Minute 75.0

Displacement/Cycle cu in (cm³) 18.8 (308.0)

Cycles/gal (L) 12.3 (3.3)

Flow @ 75 Cycles gpm (L/min) 90 (3.0)

Noise Level @ 60 psi dBA 9.0 (34.1)

Weight* lb (kg) 612041-1

Dimensions

A in (mm)

B in (mm)

612041-X

54 (1371.6)


34.625 (879.5)

612042-X

64.25 (1631.9)


44.875 (1139.8)

PERFORMANCE BASED ON 30wt. OIL (100cSt) AT 40°C TEMPERATURE

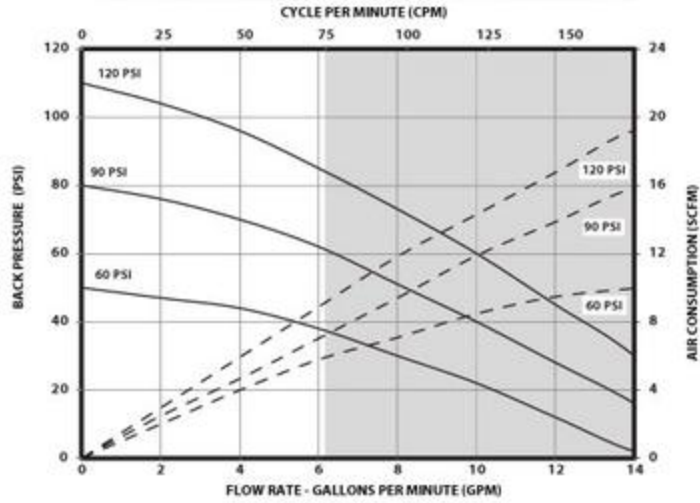

NOTE: NON SHADED AREA OF THE GRAPH REPRESENTS RECOMMENDED OPERATING RANGE

PERFORMANCE BASED ON 30wt. OIL (100cSt) AT 40°C TEMPERATURE

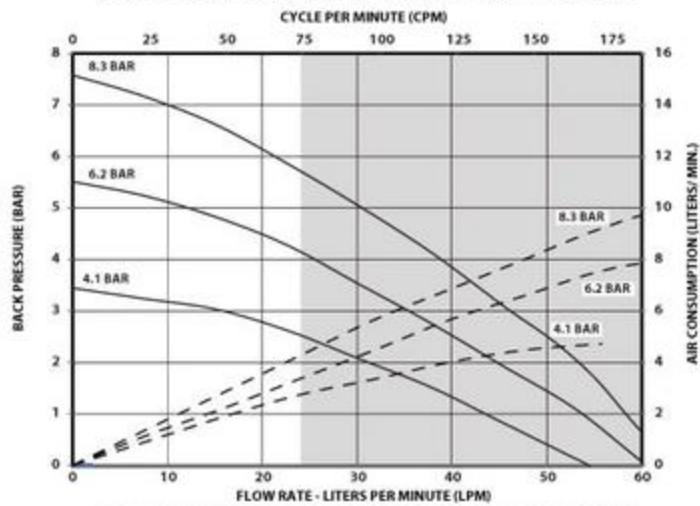

NOTE: NON SHADED AREA OF THE GRAPH REPRESENTS RECOMMENDED OPERATING RANGE