



SPECIFICATION

65031X-X N Series 2-Ball Piston Pump

Ratio	2:1
Stroke	3"
Material Inlet	1 1/4" NPS
Material Outlet	3/4" NPT(F)
Air Inlet (female)	1/4" NPT(F)
Air Inlet Pressure Range psi (bar)	0 – 150 (0 – 10.3)
Fluid Pressure Range psi (bar)	0 – 343 (0 – 23.6)
Max Cycles/Minute	120.0
Displacement/Cycle cu in (cm ³)	8.2 (134.3)
Cycles/gal (L)	28 (7.4)
Flow @ 60 Cycles gpm (L/min)	80.0


Noise Level @ 60 psi dBA

9.0 (34.1)

Weight* lb (kg)


650311X 13 (5.9)650312X 14
(6.4)

PERFORMANCE BASED ON 30wt. OIL (100 cSt) AT 40° C TEMPERATURE
CYCLES PER MINUTE (CPM)

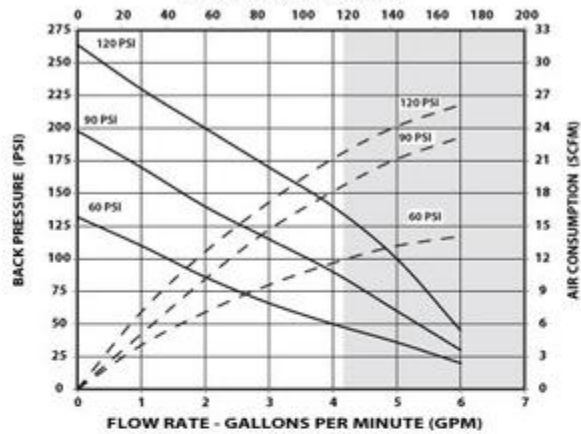

NOTE : NON SHADED AREA OF THE GRAPH REPRESENTS RECOMMENDED OPERATING RANGE

PERFORMANCE BASED ON 30wt. OIL (100 cSt) AT 40° C TEMPERATURE
CYCLES PER MINUTE (CPM)

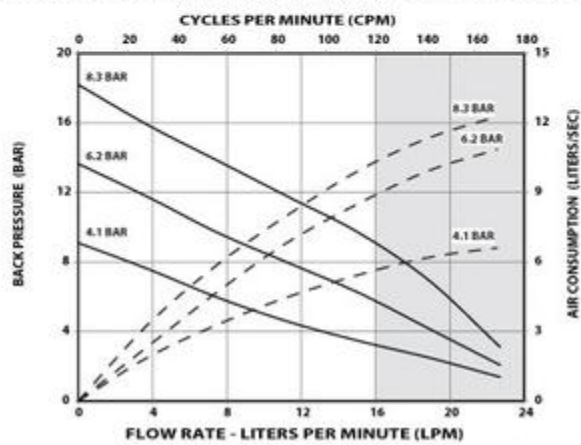

NOTE : NON SHADED AREA OF THE GRAPH REPRESENTS RECOMMENDED OPERATING RANGE