



SPECIFICATION

NM2304X-X1-X11 N Series


Ratio	4:1
Stroke	3"
Material Inlet	1-1/4" NPT(F) or Immersed
Material Outlet	3/4" NPT(F)
Air Inlet (female)	1/4" NPT(F)
Air Inlet Pressure Range psi (bar)	0 – 150 (0 – 10.3)
Fluid Pressure Range psi (bar)	0 – 600 (0 – 41.4)
Max Cycles/Minute	125
Displacement/Cycle cu in (cm³)	8.2 (134.3)
Cycles/gal (L)	28.2 (7.4)
Flow @ 60 Cycles gpm (L/min)	2.1 (8.0)
Noise Level @ 60 psi dBA	85 @100 psi

Weight* lb (kg)

32 (14.5) - 46 (20.9)


Model	A in (mm)	B in (mm)	C in (mm)
NM2304A-11-X11	30.25 (768.5)	11.75 (297.7)	13.187 (334.2)
NM2304A-41-X11	55.625 (1413.0)	37.125 (942.2)	38.562 (978.7)
NM2304B-11-X11	28.125 (714.4)	9.718 (246.8)	11.096 (281.8)
NM2304B-41-X11	51.656 (1312.1)	33.25 (844.6)	34-5/8 (879.6)

PERFORMANCE BASED ON 30wt. OIL (100 cSt) AT 40° C TEMPERATURE

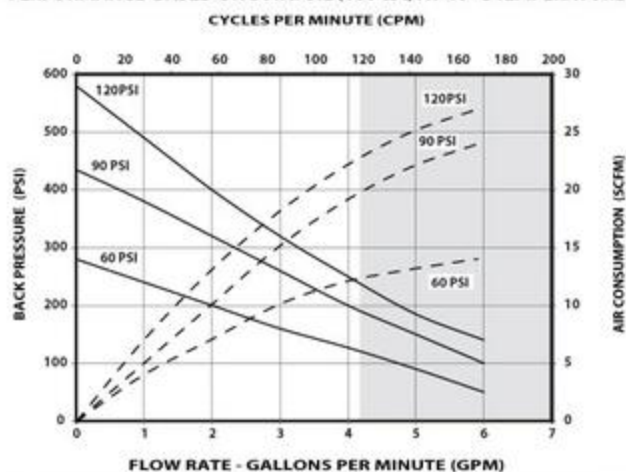

NOTE: NON SHADED AREA OF THE GRAPH REPRESENTS RECOMMENDED OPERATING RANGE

PERFORMANCE BASED ON 30wt. OIL (100 cSt) AT 40° C TEMPERATURE

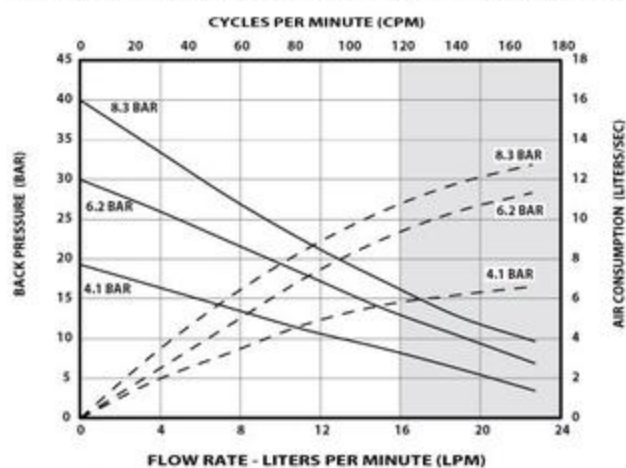

NOTE: NON SHADED AREA OF THE GRAPH REPRESENTS RECOMMENDED OPERATING RANGE