

PROJECT:	Criculators	UNIT TAG:	_____	QUANTITY:	1
REPRESENTATIVE:	Hurley Engineering	TYPE OF SERVICE:	Recirculation	DATE:	_____
ENGINEER:	TBD	SUBMITTED BY:	Devin Carle	DATE:	_____
CONTRACTOR:	TBD	APPROVED BY:	_____	DATE:	_____
		ORDER NO.:	_____	DATE:	_____





UPS 43-44 BFC

Circulator pumps

Product photo could vary from the actual product

Conditions of Service	Pump Data	Motor Data
Flow: 28 US gpm	Maximum operating pressure: 145.04 psi	Max. power input: 203 W
Head: 7.985 ft	Liquid temperature range: 35.6 .. 230 °F	Rated voltage: 230 V
Efficiency: _____	Maximum ambient temperature: 104 °F	Main frequency: 60 Hz
Liquid: Water	Approvals: UL, CSA	Insulation class: F
Temperature: 140 °F	Type of connection: Bronze Flange	Motor protection: CONTACT
NPSH required: ft	Flange standard: USA Oval	Thermal protection: internal
Viscosity: _____	Pipe connection: 2 - Bolt Flange	
Specific Gravity: 0.985	Product number: 52722521	

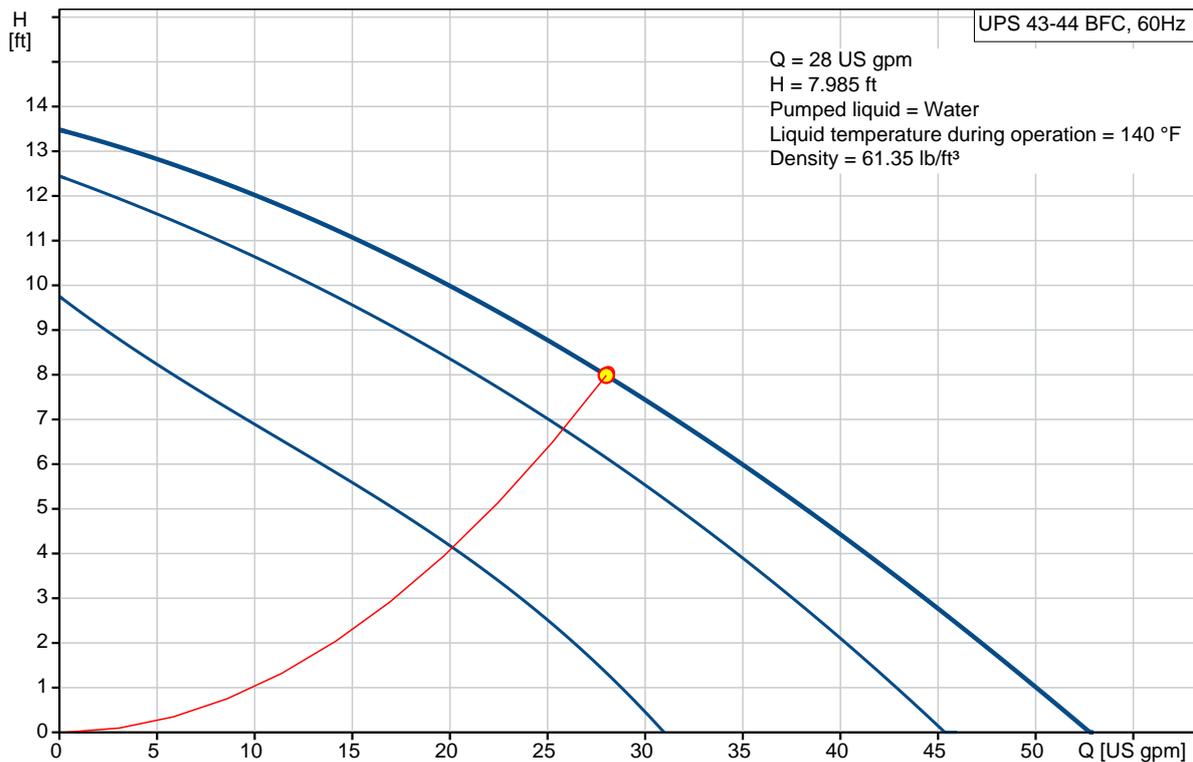

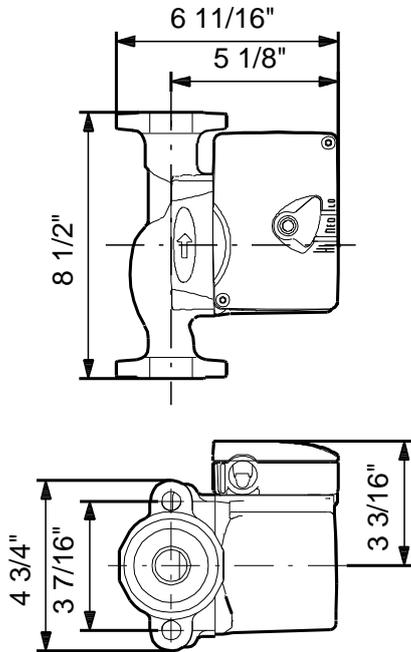

Materials:

Pump housing: Bronze
DIN W.-Nr. 2.1176.01
Impeller: Composite, PES

Count	Description																																				
1	<p data-bbox="288 405 478 439">UPS 43-44 BFC</p> <div data-bbox="327 488 654 743" style="text-align: center;">  </div> <p data-bbox="694 757 1149 784" style="text-align: center;">Product photo could vary from the actual product</p> <p data-bbox="288 788 566 815">Product No.: 52722521</p> <p data-bbox="288 819 821 904">The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing.</p> <p data-bbox="288 909 845 936">The bearings are lubricated by the pumped liquid.</p> <p data-bbox="288 940 630 967">The pump is characterized by:</p> <ul data-bbox="335 972 885 1115" style="list-style-type: none"> * Ceramic shaft and radial bearings. * Carbon axial bearing. * Stainless steel rotor can and bearing plate. * Corrosion-resistant impeller, Composite, PES. * Bronze pump housing. <p data-bbox="288 1146 758 1205">The motor is a 1-phase motor. No additional motor protection is required.</p> <p data-bbox="288 1236 391 1263">Liquid:</p> <table data-bbox="288 1267 821 1384"> <tr> <td>Pumped liquid:</td> <td>Water</td> </tr> <tr> <td>Liquid temperature range:</td> <td>35.6 .. 230 °F</td> </tr> <tr> <td>Selected liquid temperature:</td> <td>140 °F</td> </tr> <tr> <td>Density:</td> <td>61.35 lb/ft³</td> </tr> </table> <p data-bbox="288 1415 422 1442">Technical:</p> <table data-bbox="288 1447 790 1532"> <tr> <td>Actual calculated flow:</td> <td>28 US gpm</td> </tr> <tr> <td>Resulting head of the pump:</td> <td>7.985 ft</td> </tr> <tr> <td>Approvals on nameplate:</td> <td>UL, CSA</td> </tr> </table> <p data-bbox="288 1563 422 1590">Materials:</p> <table data-bbox="288 1594 901 1680"> <tr> <td>Pump housing:</td> <td>Bronze</td> </tr> <tr> <td></td> <td>DIN W.-Nr. 2.1176.01</td> </tr> <tr> <td>Impeller:</td> <td>Composite, PES</td> </tr> </table> <p data-bbox="288 1711 438 1738">Installation:</p> <table data-bbox="288 1742 829 1980"> <tr> <td>Maximum ambient temperature:</td> <td>104 °F</td> </tr> <tr> <td>Ambient max at 176°F liquid:</td> <td>176 °F</td> </tr> <tr> <td>Maximum operating pressure:</td> <td>145.04 psi</td> </tr> <tr> <td>Flange standard:</td> <td>USA Oval</td> </tr> <tr> <td>Type of connection:</td> <td>Bronze Flange</td> </tr> <tr> <td>Pipe connection:</td> <td>2 - Bolt Flange</td> </tr> <tr> <td>Pressure stage:</td> <td>10</td> </tr> <tr> <td>Port-to-port length:</td> <td>8 1/2 in</td> </tr> </table> <p data-bbox="288 2011 478 2038">Electrical data:</p>	Pumped liquid:	Water	Liquid temperature range:	35.6 .. 230 °F	Selected liquid temperature:	140 °F	Density:	61.35 lb/ft³	Actual calculated flow:	28 US gpm	Resulting head of the pump:	7.985 ft	Approvals on nameplate:	UL, CSA	Pump housing:	Bronze		DIN W.-Nr. 2.1176.01	Impeller:	Composite, PES	Maximum ambient temperature:	104 °F	Ambient max at 176°F liquid:	176 °F	Maximum operating pressure:	145.04 psi	Flange standard:	USA Oval	Type of connection:	Bronze Flange	Pipe connection:	2 - Bolt Flange	Pressure stage:	10	Port-to-port length:	8 1/2 in
Pumped liquid:	Water																																				
Liquid temperature range:	35.6 .. 230 °F																																				
Selected liquid temperature:	140 °F																																				
Density:	61.35 lb/ft³																																				
Actual calculated flow:	28 US gpm																																				
Resulting head of the pump:	7.985 ft																																				
Approvals on nameplate:	UL, CSA																																				
Pump housing:	Bronze																																				
	DIN W.-Nr. 2.1176.01																																				
Impeller:	Composite, PES																																				
Maximum ambient temperature:	104 °F																																				
Ambient max at 176°F liquid:	176 °F																																				
Maximum operating pressure:	145.04 psi																																				
Flange standard:	USA Oval																																				
Type of connection:	Bronze Flange																																				
Pipe connection:	2 - Bolt Flange																																				
Pressure stage:	10																																				
Port-to-port length:	8 1/2 in																																				



Company name: Hurley Engineering
Created by:
Phone:

Date: 3/23/2020


Count	Description
	Power input in speed 1: 0.2105 HP
	Power input in speed 2: 190 W
	Max. power input: 203 W
	Main frequency: 60 Hz
	Rated voltage: 1 x 230 V
	Current in speed 1: 0.7 A
	Current in speed 2: 0.8 A
	Current in speed 3: 0.9 A
	Capacitor size - run: 5 μ F/400 V
	Number of poles: 2
	Insulation class (IEC 85): F
	Others:
	Gross weight: 13.5 lb
	Country of origin: US
	Custom tariff no.: 8413.70.2005





Company name: Hurley Engineering
Created by:
Phone:

Date: 3/23/2020

52722521 UPS 43-44 BFC 60 Hz

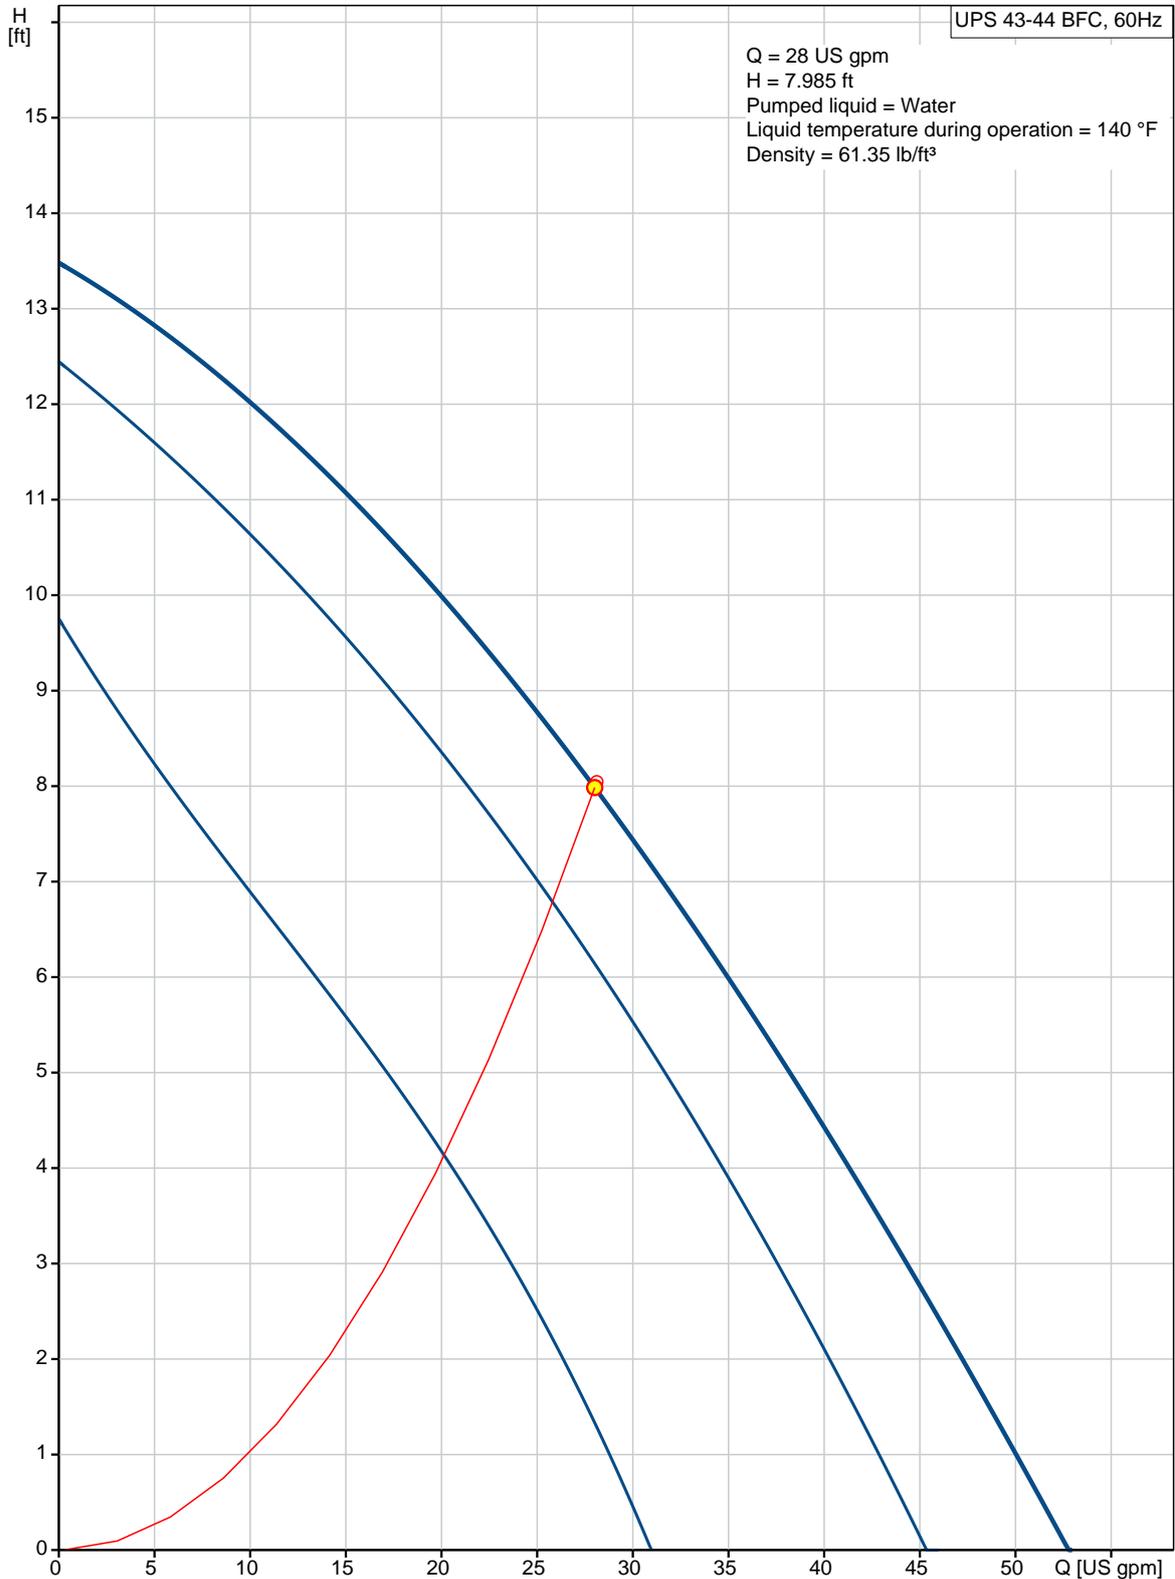

Description	Value
General information:	
Product name:	UPS 43-44 BFC
Product No.:	52722521
EAN:	5700834891069
	5700834891069
Technical:	
Speed Number:	3
Actual calculated flow:	28 US gpm
Max flow:	63 US gpm
Resulting head of the pump:	7.985 ft
Head max:	14.11 ft
Approvals on nameplate:	UL, CSA
Valve:	pump with built-in isolating and non-return valves
Materials:	
Pump housing:	Bronze
	DIN W.-Nr. 2.1176.01
Impeller:	Composite, PES
Installation:	
Maximum ambient temperature:	104 °F
Ambient max at 176°F liquid:	176 °F
Maximum operating pressure:	145.04 psi
Flange standard:	USA Oval
Type of connection:	Bronze Flange
Pipe connection:	2 - Bolt Flange
Pressure stage:	10
Port-to-port length:	8 1/2 in
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	35.6 .. 230 °F
Selected liquid temperature:	140 °F
Density:	61.35 lb/ft³
Electrical data:	
Power input in speed 1:	0.2105 HP
Power input in speed 2:	190 W
Max. power input:	203 W
Main frequency:	60 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	0.7 A
Current in speed 2:	0.8 A
Current in speed 3:	0.9 A
Capacitor size - run:	5 µF/400 V
Number of poles:	2
Insulation class (IEC 85):	F
Motor protection:	CONTACT
Thermal protec:	internal
Controls:	
Pos term box:	9H
Others:	
Gross weight:	13.5 lb
Country of origin:	US

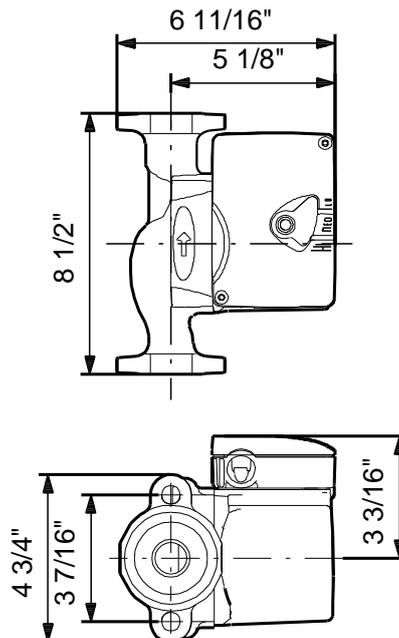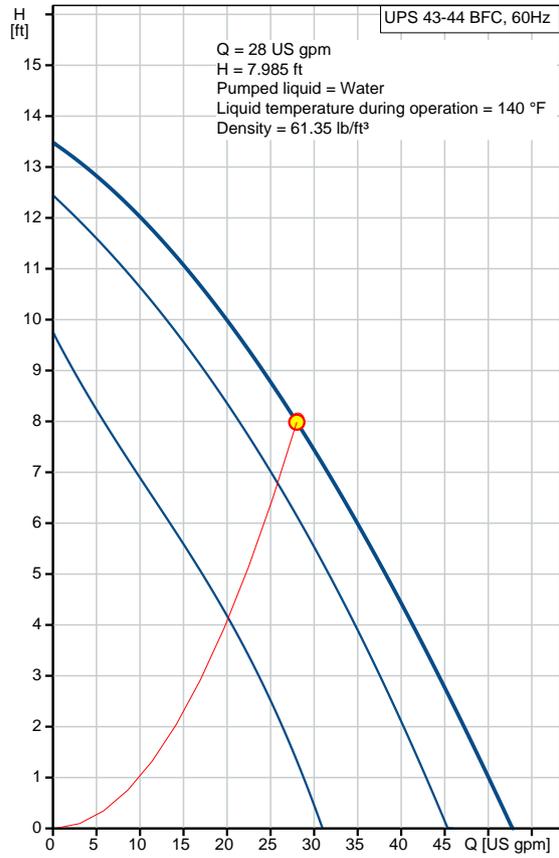




Company name: Hurley Engineering
Created by:
Phone:

Date: 3/23/2020

Description	Value
Custom tariff no.:	8413.70.2005

52722521 UPS 43-44 BFC 60 Hz

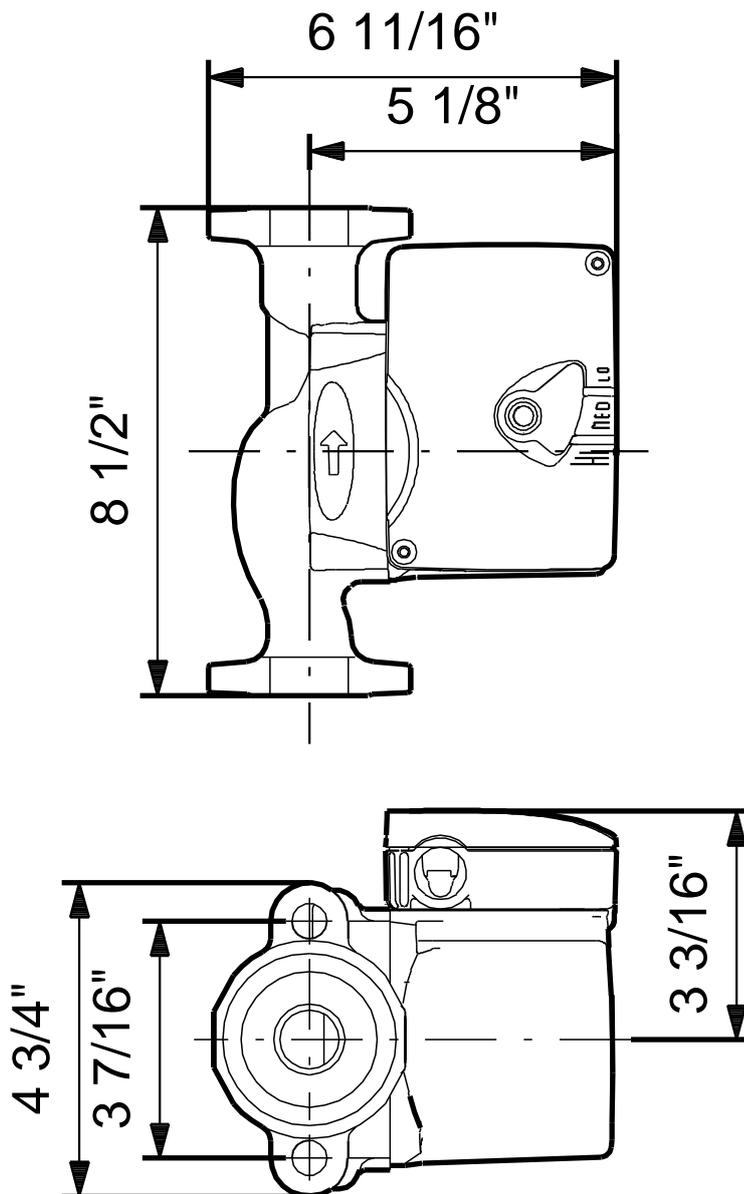

Note! All units are in [in] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.