

PROJECT:	Criculators	UNIT TAG:	_____	QUANTITY:	1
REPRESENTATIVE:	Hurley Engineering	TYPE OF SERVICE:	Recirculation	DATE:	_____
ENGINEER:	TBD	SUBMITTED BY:	Devin Carle	DATE:	_____
CONTRACTOR:	TBD	APPROVED BY:	_____	DATE:	_____
		ORDER NO.:	_____	DATE:	_____





UP 43-110 F

Circulator pumps

Product photo could vary from the actual product

Conditions of Service	Pump Data	Motor Data
Flow: 55.4 US gpm	Maximum operating pressure: 124.73 psi	Max. power input: 590 W
Head: 25.09 ft	Liquid temperature range: 14 .. 230 °F	Rated voltage: 115/230 V
Efficiency: 45.3 %	Maximum ambient temperature: 104 °F	Main frequency: 60 Hz
Liquid: Water	Approvals: UL,CUL	Enclosure class: X4D
Temperature: 140 °F	Type of connection: F	Insulation class: F
NPSH required: ft	Flange standard: USA	Motor protection: CONTACT
Viscosity: _____	Pipe connection: GF 40/43	Thermal protection: internal
Specific Gravity: 0.985	Product number: 96439643	

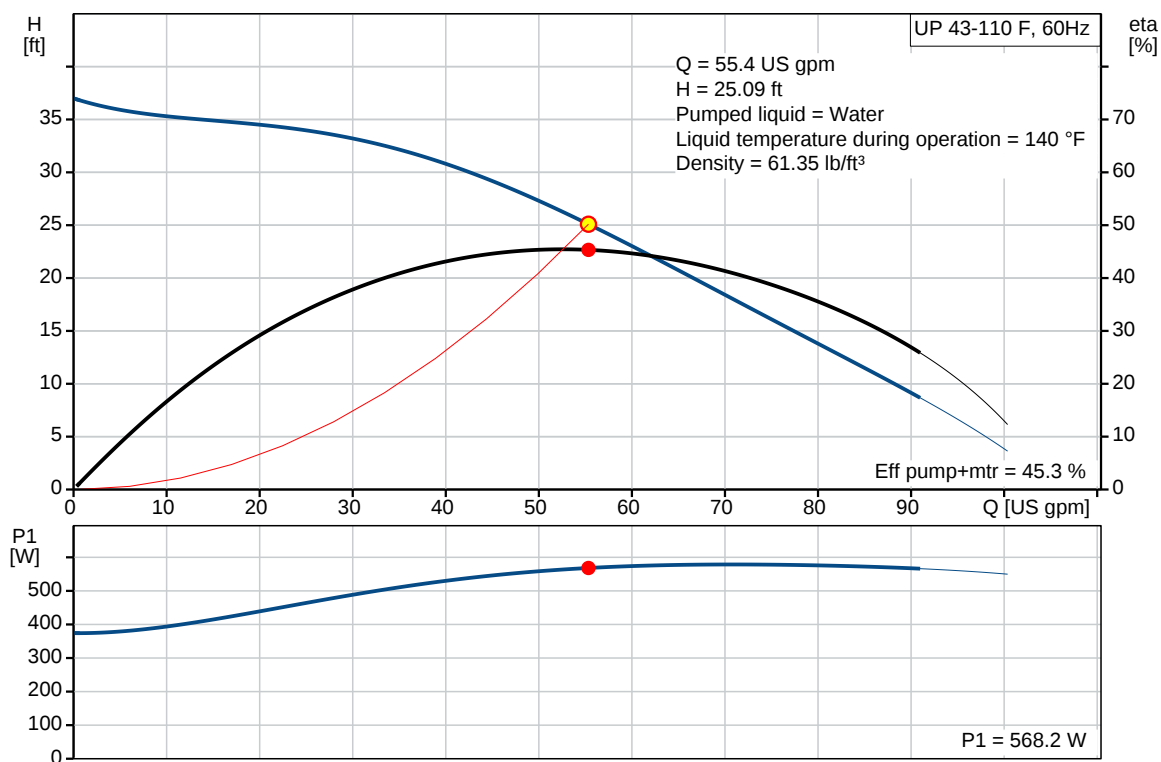


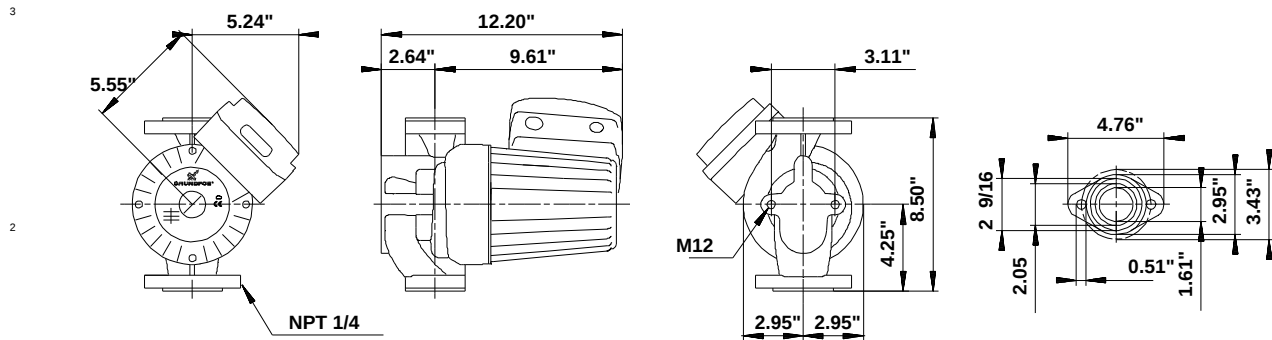

Materials:

Pump housing: Cast iron
EN-JL1040
ASTM 35 B - 40 B

Impeller: Stainless steel
DIN W.-Nr. 1.4301
AISI 304

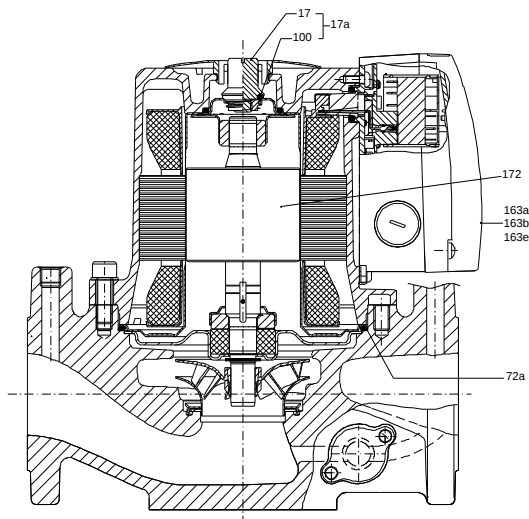

Count	Description
1	UP 43-110 F  Product photo could vary from the actual product Product No.: 96439643 The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid. In order to avoid problems in connection with disposal, great importance has been attached to using as few different materials as possible. The pump is characterized by: * 1 speed motor. * Ceramic radial bearings. * Carbon axial bearing. * Stainless steel rotor can, bearing plate and rotor cladding. * Aluminium alloy stator housing. * Cast iron pump housing. * Stator with built-in thermal switch. The motor is a 1-phase motor. The pump is supplied with a standard module in the terminal box. The standard module is to be connected to the mains supply via external contactor. Controls: Relay: without relay Liquid: Pumped liquid: Water Liquid temperature range: 14 .. 230 °F Selected liquid temperature: 140 °F Density: 61.35 lb/ft³ Technical: Actual calculated flow: 55.4 US gpm Resulting head of the pump: 25.09 ft Approvals on nameplate: UL,CUL Materials:





Company name: Hurley Engineering
Created by:
Phone:

Date: 3/23/2020




Count	Description
	Pump housing: Cast iron EN-JL1040 ASTM 35 B - 40 B Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Installation: Maximum ambient temperature: 104 °F Maximum operating pressure: 124.73 psi Flange standard: USA Type of connection: F Pipe connection: GF 40/43 Pressure stage: 125 psi Port-to-port length: 8 9/16 in Electrical data: Max. power input: 590 W Main frequency: 60 Hz Rated voltage: 1 x 115/230 V Current in speed 3: 5.1/2.7 A Cos phi: 0.98 Capacitor size - run: 60 µF/240 V Enclosure class (IEC 34-5): X4D Insulation class (IEC 85): F Others: Net weight: 33.1 lb Gross weight: 40.6 lb Shipping volume: 2.08 ft³ Country of origin: RS Custom tariff no.: 8413.70.2005

96439643 UP 43-110 F 60 Hz

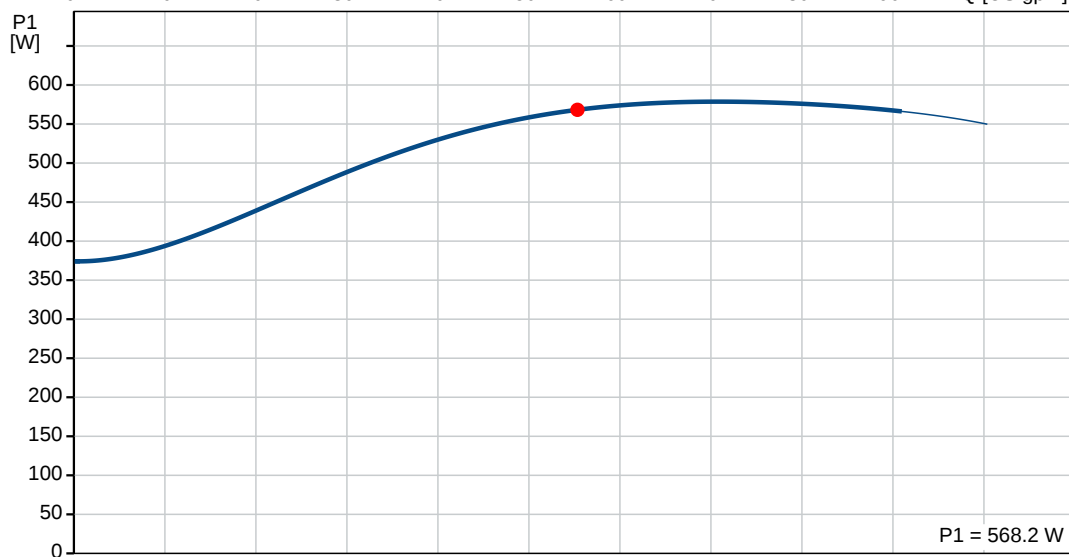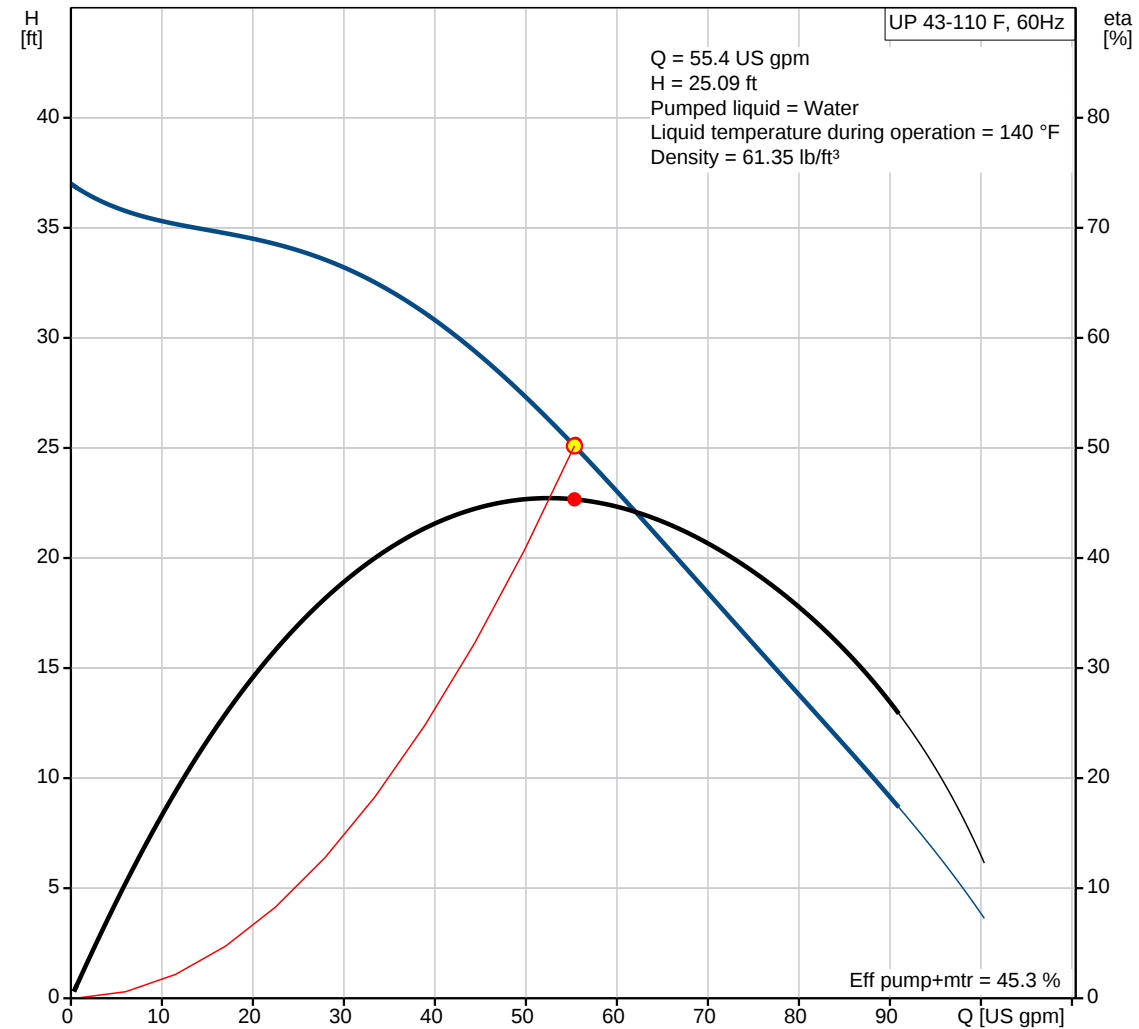


Date: 3/23/2020

Description	Value
General information:	
Product name:	UP 43-110 F
Product No.:	96439643
EAN:	5700393918566
	5700393918566
Technical:	
Speed Number:	1
Actual calculated flow:	55.4 US gpm
Resulting head of the pump:	25.09 ft
Head max:	36.09 ft
Approvals on nameplate:	UL,CUL
Model:	B
Materials:	
Pump housing:	Cast iron
	EN-JL1040
	ASTM 35 B - 40 B
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Installation:	
Maximum ambient temperature:	104 °F
Maximum operating pressure:	124.73 psi
Flange standard:	USA
Type of connection:	F
Pipe connection:	GF 40/43
Pressure stage:	125 psi
Port-to-port length:	8 9/16 in
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	14 .. 230 °F
Selected liquid temperature:	140 °F
Density:	61.35 lb/ft³
Electrical data:	
Max. power input:	590 W
Main frequency:	60 Hz
Rated voltage:	1 x 115/230 V
Current in speed 3:	5.1/2.7 A
Cos phi:	0.98
Capacitor size - run:	60 µF/240 V
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	F
Motor protection:	CONTACT
Thermal protec:	internal
Controls:	
Relay:	without relay
Pos term box:	1.30H
Others:	
Net weight:	33.1 lb
Gross weight:	40.6 lb
Shipping volume:	2.08 ft³
Sales region:	Namreg
Country of origin:	RS
Custom tariff no.:	8413.70.2005

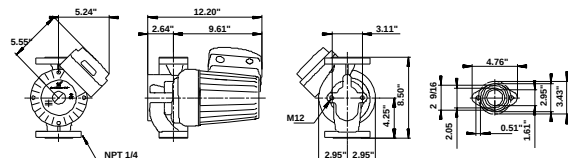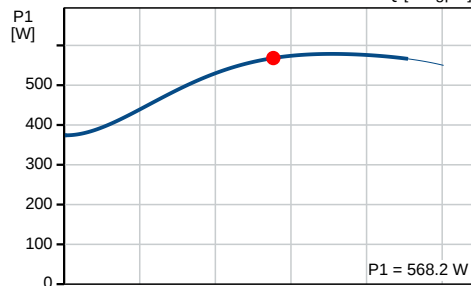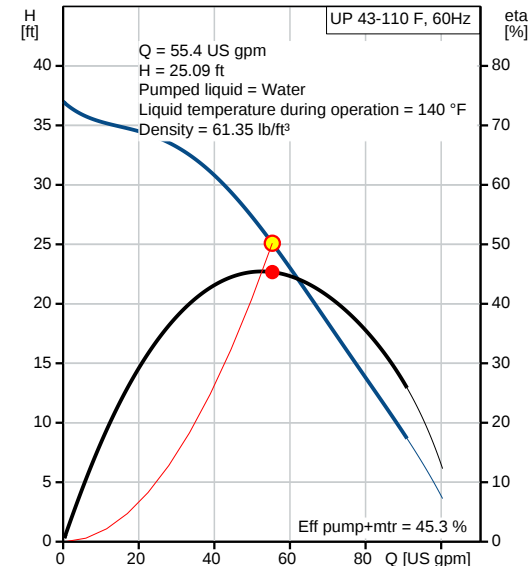

96439643 UP 43-110 F 60 Hz

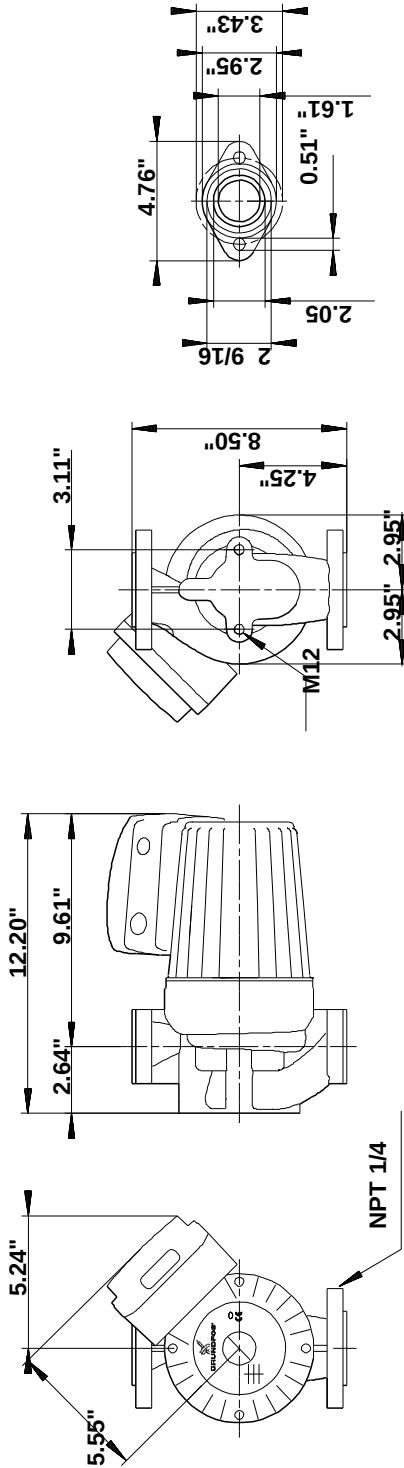

Note! All units are in [in] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.