

PROJECT: _____	UNIT TAG: _____	QUANTITY: _____
REPRESENTATIVE: _____	TYPE OF SERVICE: _____	DATE: _____
ENGINEER: _____	SUBMITTED BY: _____	DATE: _____
CONTRACTOR: _____	APPROVED BY: _____	DATE: _____
	ORDER NO.: _____	DATE: _____






Product photo could vary from the actual product

CMBE 1-99 I-U-C-E-D-E

Compact booster set for water supply in light commercial applications. Pump materials in contact with the liquid are in stainless steel AISI 304 (EN 1.4301)

Conditions of Service	Pump Data	Motor Data
Flow: _____	Liquid temperature range: 32 .. 140 °F	Rated power - P2: 1.5 HP
Head: _____	Maximum ambient temperature: 122 °F	Rated voltage: 200-240 V
Efficiency: _____	Shaft seal: AQQE	Main frequency: 50 / 60 Hz
Liquid: Water	Flange standard: INTERNAL NPT THREAD	Enclosure class: IP55
Temperature: 68 °F	Product number: 98548111	Insulation class: F
NPSH required: ft		
Viscosity: _____		
Specific Gravity: 1.000		

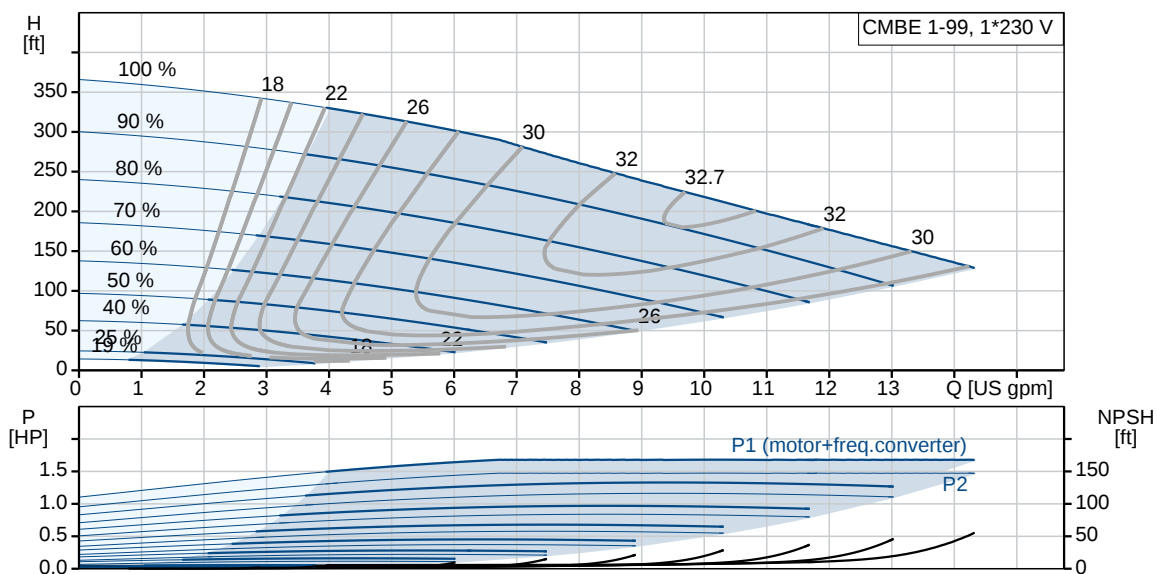

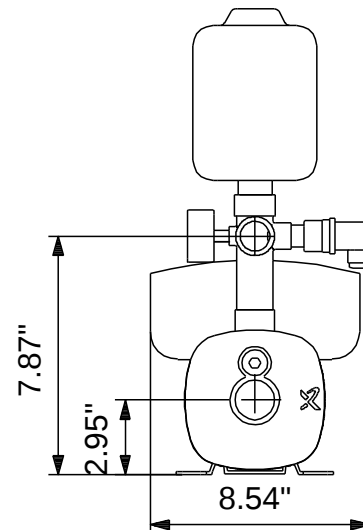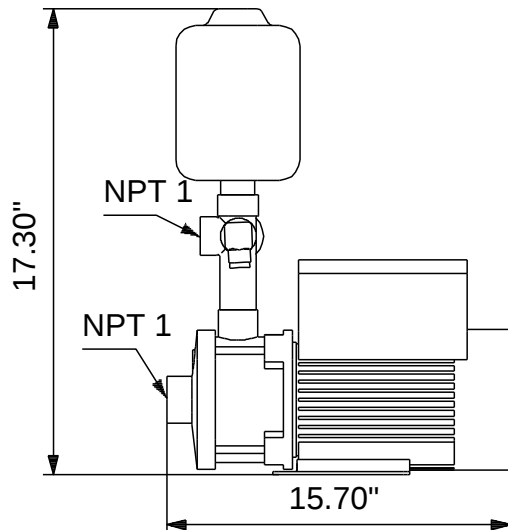

Materials:

Pump housing: Stainless steel
DIN W.-Nr. 1.4301
AISI 304

Impeller: Stainless steel
DIN W.-Nr. 1.4301
AISI 304

Rubber: EPDM

Count	Description														
1	CMBE 1-99 I-U-C-E-D-E  Product No.: 98548111 The Grundfos CME Booster is a compact booster system for water supply in domestic applications. The integrated speed controller enables the CME Booster to keep constant pressure in the pipe system. A pressure sensor monitoring changes in the water consumption will signal to the speed controller to change the motor speed to adapt performance to the new state. The CME Booster is very easy to install. When the pipework has been installed, it is all a matter of plugging the unit into a socket, and the system is operational. The CME Booster consists of: • CME pump with integrated frequency converter • 5-way valve • expansion tank • pressure gauge • manometer Features • Constant pressure, integrated speed control • compact • robust, stainless steel • easy installation • dry run protection Thermal protection CME Booster pumps require no external motor protection. The MGE motor incorporates thermal protection against slow overloading and blocking (IEC 34.11: TP 211). Liquid: <table> <tr> <td>Pumped liquid:</td><td>Water</td></tr> <tr> <td>Liquid temperature range:</td><td>32 .. 140 °F</td></tr> <tr> <td>Selected liquid temperature:</td><td>68 °F</td></tr> <tr> <td>Density:</td><td>62.29 lb/ft³</td></tr> </table> Technical: <table> <tr> <td>Pump speed on which pump data is based:</td><td>3780 rpm</td></tr> <tr> <td>Rated flow:</td><td>10.6 US gpm</td></tr> <tr> <td>Rated head:</td><td>204.4 ft</td></tr> </table>	Pumped liquid:	Water	Liquid temperature range:	32 .. 140 °F	Selected liquid temperature:	68 °F	Density:	62.29 lb/ft³	Pump speed on which pump data is based:	3780 rpm	Rated flow:	10.6 US gpm	Rated head:	204.4 ft
Pumped liquid:	Water														
Liquid temperature range:	32 .. 140 °F														
Selected liquid temperature:	68 °F														
Density:	62.29 lb/ft³														
Pump speed on which pump data is based:	3780 rpm														
Rated flow:	10.6 US gpm														
Rated head:	204.4 ft														




Company name: Hurley Engineering
Created by:
Phone:




Date: 5/20/2020

Count	Description
	Primary shaft seal: AQQE Approvals and markings: CE,CULUS Curve tolerance: ISO9906:2012 3B Return valve: YES Start pressure: Integrated Frequency converter Materials: Pump housing: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Rubber: EPDM Installation: Maximum ambient temperature: 122 °F Flange standard: INTERNAL NPT THREAD Pump inlet: NPT 1 Pump outlet: NPT 1 Electrical data: Rated power - P2: 1.5 HP Main frequency: 50 / 60 Hz Rated voltage: 1 x 200-240 V Maximum current consumption: 6.70-5.60 A Rated speed: 360-4000 rpm Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Type of cable plug: NONE Mains cable: NO CABLE m Tank: Tank volume: 0.528 gal Others: Net weight: 42 lb Gross weight: 64 lb Country of origin: US Custom tariff no.: 8413.70.2040

98548111 CMBE 1-99 I-U-C-E-D-E

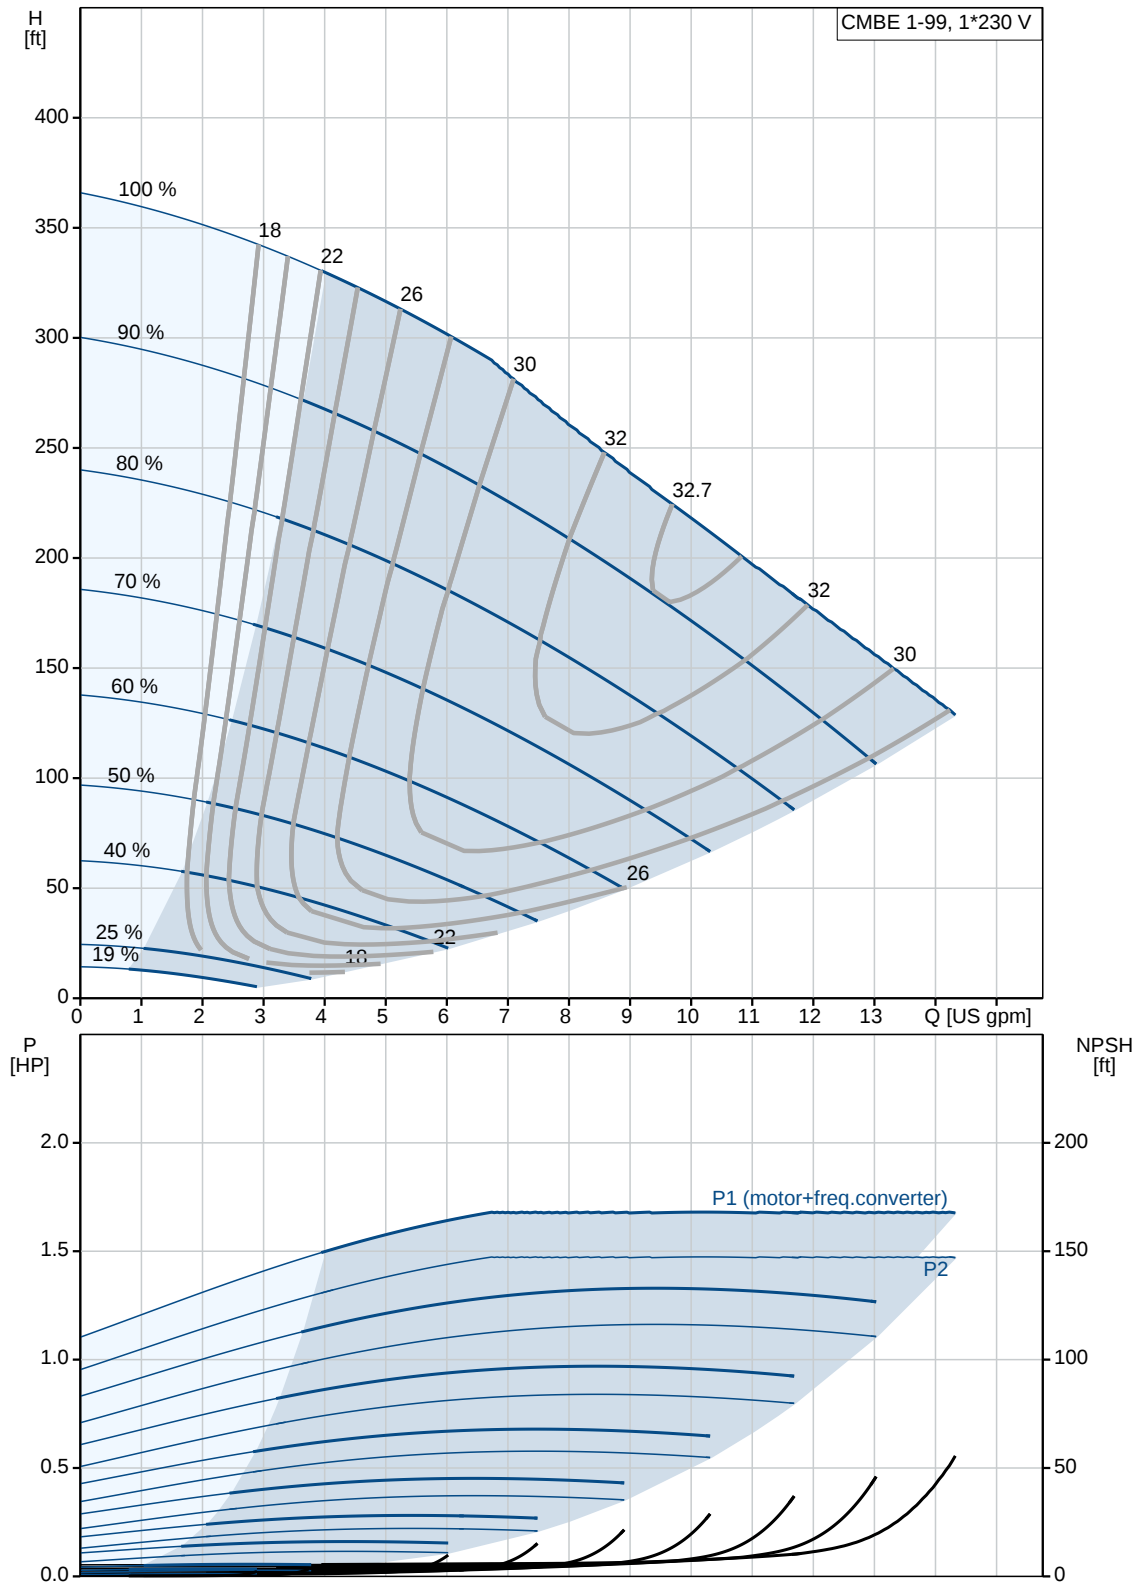

Description	Value
General information:	
Product name:	CMBE 1-99 I-U-C-E-D-E
Product No.:	98548111
EAN:	5711496977480
	5711496977480
Technical:	
Pump speed on which pump data is based:	3780 rpm
Rated flow:	10.6 US gpm
Rated head:	204.4 ft
Impellers:	7
Primary shaft seal:	AQQE
Approvals and markings:	CE,CULUS
Curve tolerance:	ISO9906:2012 3B
Model:	A
Return valve:	YES
Start pressure:	Integrated Frequency converter
Materials:	
Pump housing:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Rubber:	EPDM
Installation:	
Maximum ambient temperature:	122 °F
Flange standard:	INTERNAL NPT THREAD
Pump inlet:	NPT 1
Pump outlet:	NPT 1
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	32 ... 140 °F
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft ³
Electrical data:	
Rated power - P2:	1.5 HP
Main frequency:	50 / 60 Hz
Rated voltage:	1 x 200-240 V
Maximum current consumption:	6.70-5.60 A
p max system:	145.04 psi
Rated speed:	360-4000 rpm
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Type of cable plug:	NONE
Mains cable:	NO CABLE m
Tank:	
Tank volume:	0.528 gal
Others:	
Net weight:	42 lb
Gross weight:	64 lb
Config. file no:	95139604

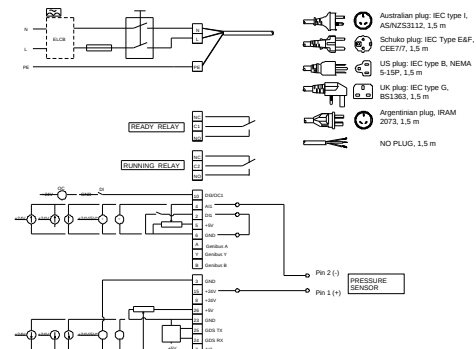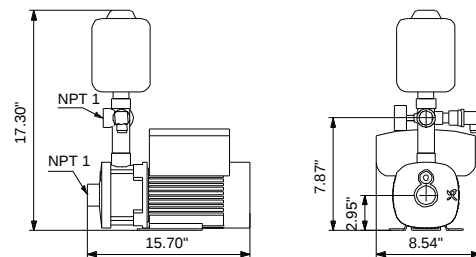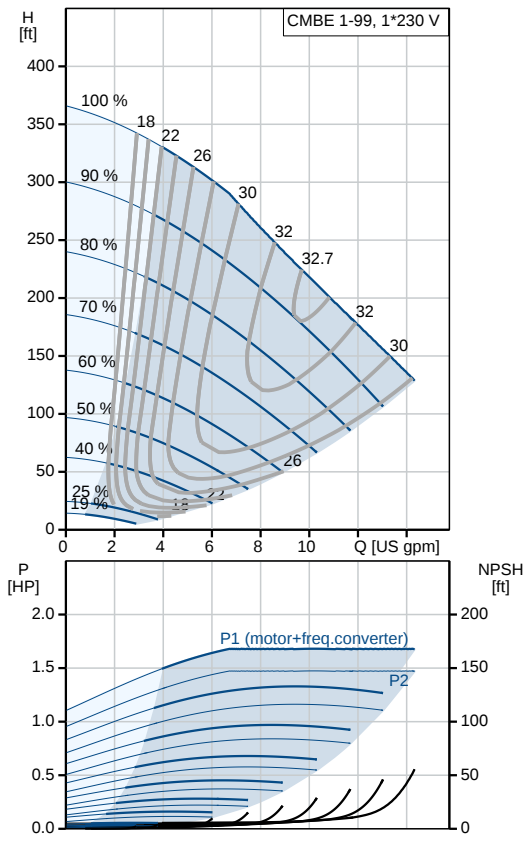




Company name: Hurley Engineering
Created by:
Phone:



Date: 5/20/2020

Description	Value
Country of origin:	US
Custom tariff no.:	8413.70.2040

98548111 CMBE 1-99 I-U-C-E-D-E




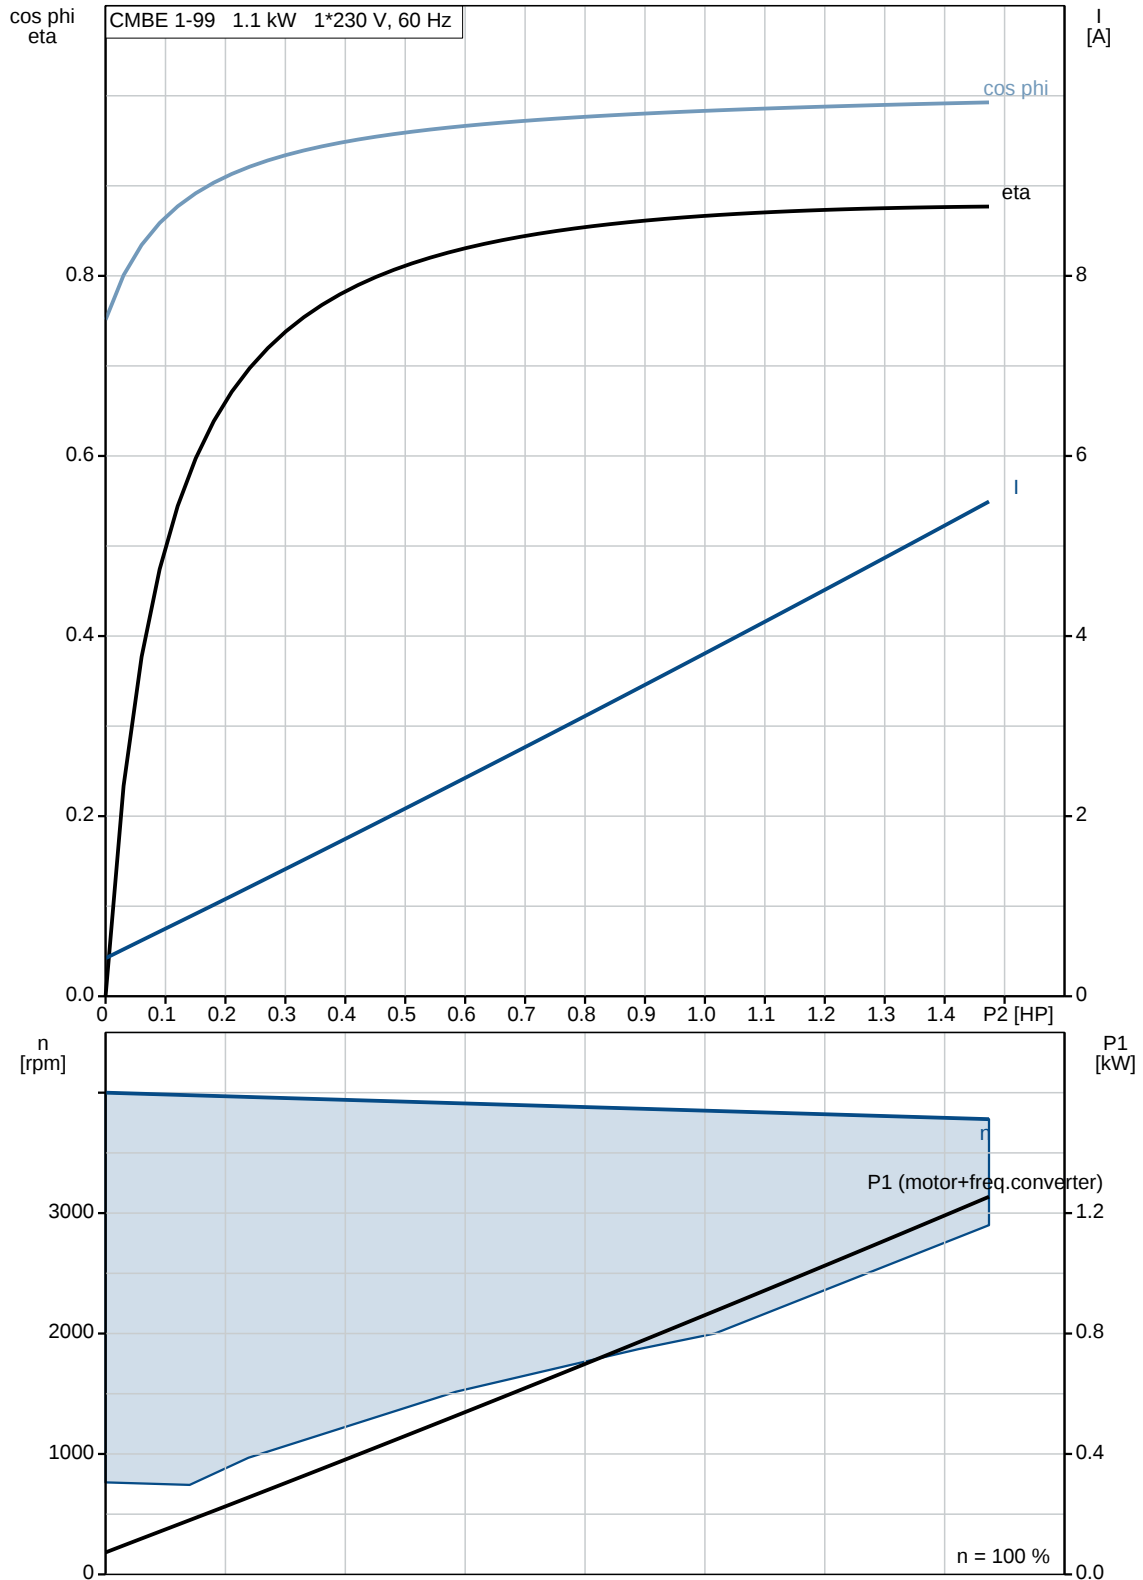


98548111 CMBE 1-99 I-U-C-E-D-E

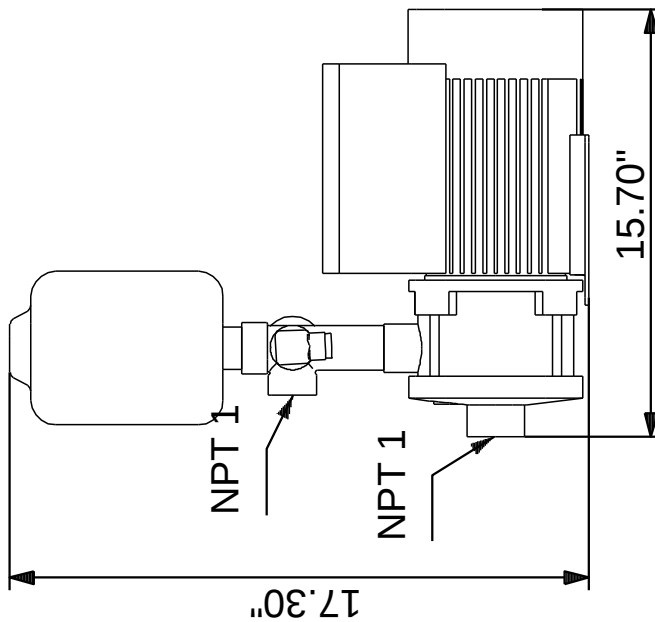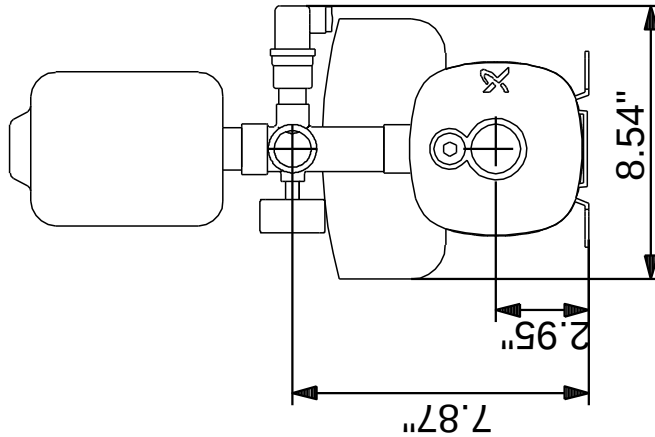

Note! All units are in [in] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.

98548111 CMBE 1-99 I-U-C-E-D-E

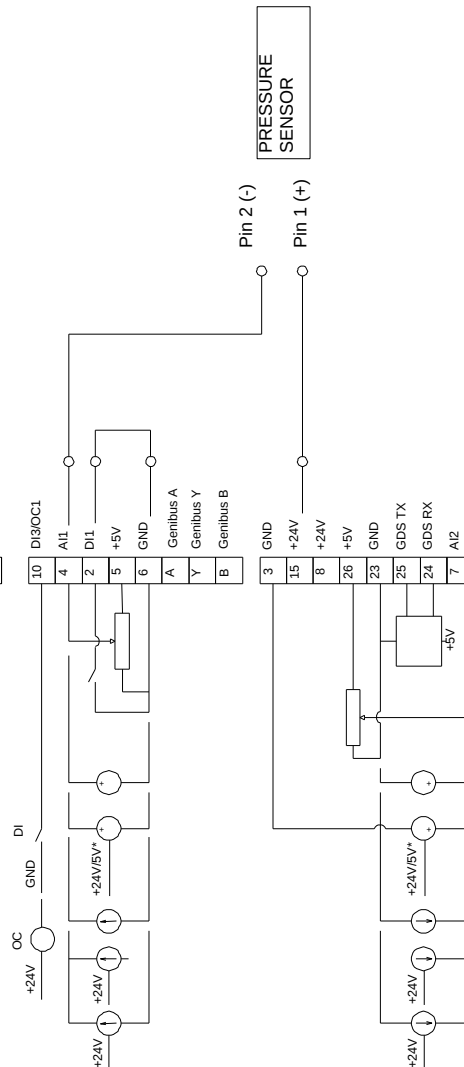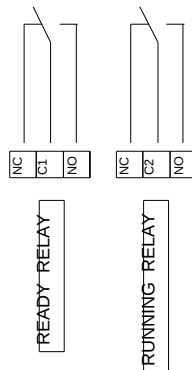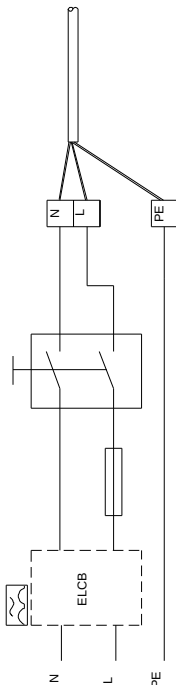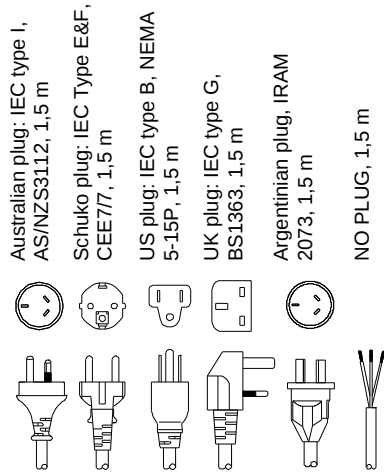

All units are [in] unless otherwise presented.



Company name: Hurley Engineering
Created by:
Phone:

Date: 5/20/2020

Order Data:

Product name: CMBE 1-99 I-U-C-E-D-E
Amount: 1
Product No.: 98548111

Total: Price on request
