

PROJECT:	_____	UNIT TAG:	_____	QUANTITY:	_____
REPRESENTATIVE:	Hurley Engineering	TYPE OF SERVICE:	_____	DATE:	_____
ENGINEER:	_____	SUBMITTED BY:	Devin Carle	DATE:	_____
CONTRACTOR:	TBD	APPROVED BY:	_____	DATE:	_____
		ORDER NO.:	_____	DATE:	_____


SL1.40.A60.75.EX.4.61R.C



Sewage pumps



Product photo could vary from the actual product

Conditions of Service	Pump Data	Motor Data
Flow: _____	Maximum ambient temperature: 104 °F	Rated voltage: 230/460 V
Head: _____	Approvals: CSA, FM	Main frequency: 60 Hz
Efficiency: _____	Flange standard: ANSI	Number of poles: 4
Liquid: any viscous fluid	Product number: 99030153	Enclosure class: IP68
Temperature: _____		Insulation class: H
NPSH required: ft		Motor protection: THERMAL SWITCH
Viscosity: _____		Motor_efficiency: 88.9 %
Specific Gravity: 1.000		

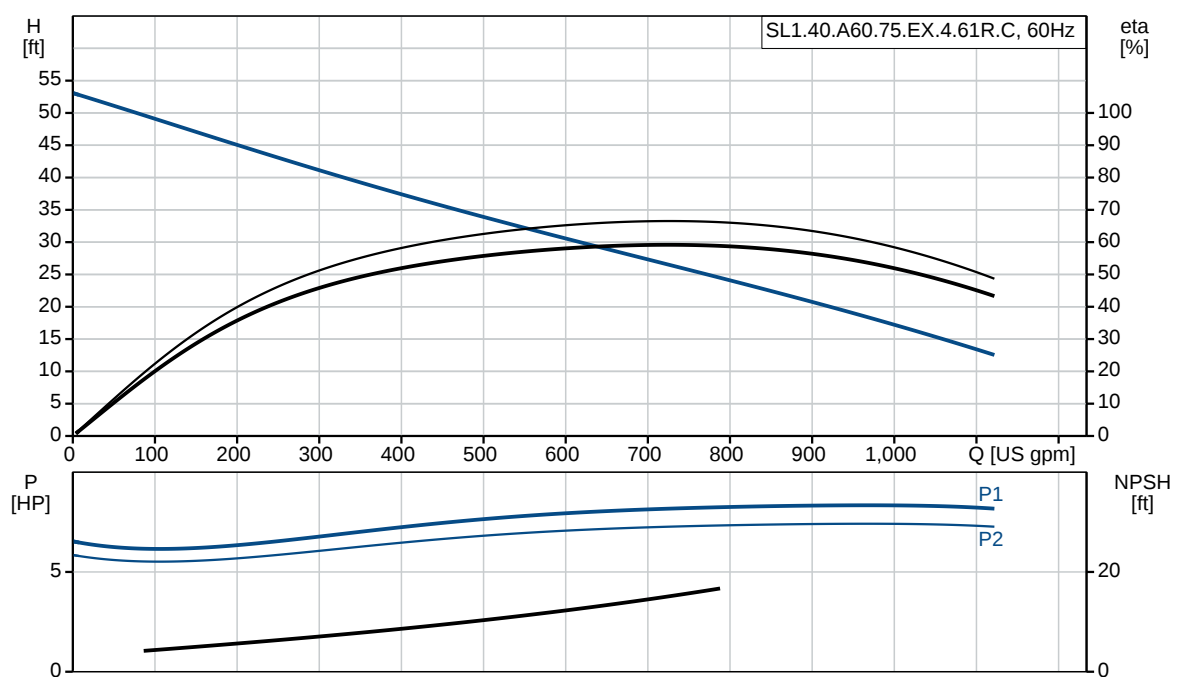

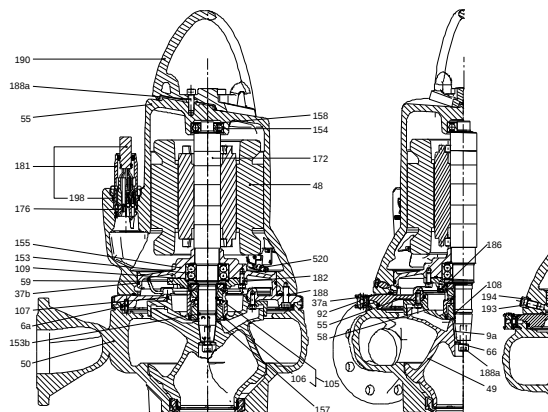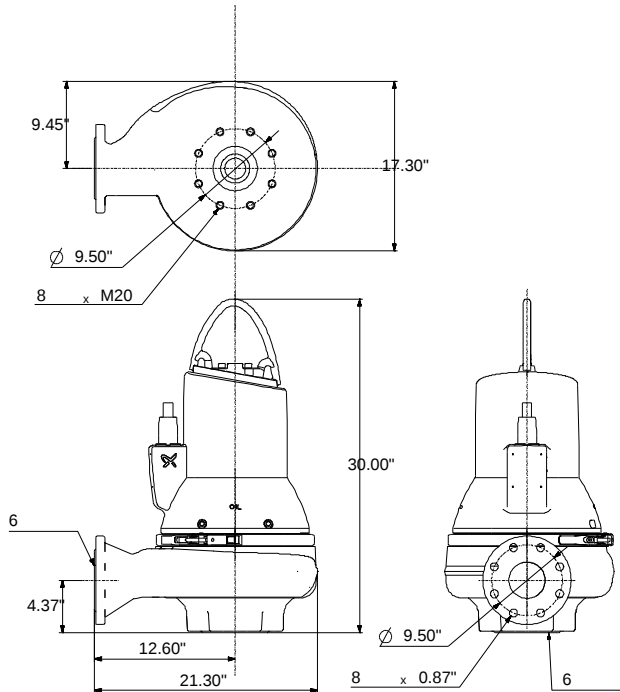

Materials:

Pump housing: Cast iron
 EN 5.1301 EN-GJL-250
 ASTM A48-250B

Impeller: Cast iron
 EN 5.1301 EN-GJL-250
 ASTM A48-250B

Motor: EN-GJL-250

Count	Description																												
1	SL1.40.A60.75.EX.4.61R.C  Product photo could vary from the actual product Product No.: 99030153 Non-self-priming, single-stage, centrifugal pump designed for handling wastewater, process water and unscreened raw sewage. The pump is designed for intermittent and continuous operations in submerged installation. The revolutionary S-tube® impeller provides free spherical passage of solids up to 3 15/16 in and is suitable for wastewater with a dry matter content of up to 3 %. A unique stainless-steel clamp assembling system enables quick and easy disassembly of the pump from the motor unit for service and inspection. No special tools are required. Pipework connection is via a ANSI flange. The pump is explosion-proof. Controls: <table> <tr> <td>Moisture sensor:</td><td>with moisture sensors</td></tr> <tr> <td>Water-in-oil sensor:</td><td>without water-in-oil sensor</td></tr> </table> Liquid: <table> <tr> <td>Pumped liquid:</td><td>any viscous fluid</td></tr> <tr> <td>Maximum liquid temperature:</td><td>104 °F</td></tr> <tr> <td>Density:</td><td>62.29 lb/ft³</td></tr> </table> Technical: <table> <tr> <td>Type of impeller:</td><td>S-TUBE</td></tr> <tr> <td>Maximum particle size:</td><td>3 15/16 in</td></tr> <tr> <td>Primary shaft seal:</td><td>SIC/SIC</td></tr> <tr> <td>Secondary shaft seal:</td><td>CARBON/CERAMICS</td></tr> <tr> <td>Approvals on nameplate:</td><td>CSA, FM</td></tr> <tr> <td>Curve tolerance:</td><td>ANSI/HI11.6:2012 3B2</td></tr> </table> Materials: <table> <tr> <td>Pump housing:</td><td>Cast iron EN 5.1301 EN-GJL-250 ASTM A48-250B</td></tr> <tr> <td>Impeller:</td><td>Cast iron EN 5.1301 EN-GJL-250 ASTM A48-250B</td></tr> <tr> <td>Motor:</td><td>EN-GJL-250</td></tr> </table> Installation:	Moisture sensor:	with moisture sensors	Water-in-oil sensor:	without water-in-oil sensor	Pumped liquid:	any viscous fluid	Maximum liquid temperature:	104 °F	Density:	62.29 lb/ft³	Type of impeller:	S-TUBE	Maximum particle size:	3 15/16 in	Primary shaft seal:	SIC/SIC	Secondary shaft seal:	CARBON/CERAMICS	Approvals on nameplate:	CSA, FM	Curve tolerance:	ANSI/HI11.6:2012 3B2	Pump housing:	Cast iron EN 5.1301 EN-GJL-250 ASTM A48-250B	Impeller:	Cast iron EN 5.1301 EN-GJL-250 ASTM A48-250B	Motor:	EN-GJL-250
Moisture sensor:	with moisture sensors																												
Water-in-oil sensor:	without water-in-oil sensor																												
Pumped liquid:	any viscous fluid																												
Maximum liquid temperature:	104 °F																												
Density:	62.29 lb/ft³																												
Type of impeller:	S-TUBE																												
Maximum particle size:	3 15/16 in																												
Primary shaft seal:	SIC/SIC																												
Secondary shaft seal:	CARBON/CERAMICS																												
Approvals on nameplate:	CSA, FM																												
Curve tolerance:	ANSI/HI11.6:2012 3B2																												
Pump housing:	Cast iron EN 5.1301 EN-GJL-250 ASTM A48-250B																												
Impeller:	Cast iron EN 5.1301 EN-GJL-250 ASTM A48-250B																												
Motor:	EN-GJL-250																												




Company name: Hurley Engineering
Created by:
Phone:

Date: 1/6/2020




Count	Description
	Maximum ambient temperature: 104 °F Flange standard: ANSI Pump inlet: 150 Pump outlet: 150 Pressure stage: PN 10 Maximum installation depth: 65.6 ft Frame range: C Electrical data: Power input - P1: 6.4 kW Rated power - P2: 7.5 HP Main frequency: 60 Hz Rated voltage: 3 x 230/460 V Voltage tolerance: +10/-10 % Max starts per. hour: 20 Rated current: 19.2/10.1 A Starting current: 120 A Cos phi - power factor: 0.87 Cos phi - p.f. at 3/4 load: 0.84 Cos phi - p.f. at 1/2 load: 0.77 Rated speed: 1750 rpm Motor efficiency at full load: 88.9 % Motor efficiency at 3/4 load: 89.65 % Motor efficiency at 1/2 load: 89.2 % Number of poles: 4 Start. method: star/delta Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): H Explosion proof: yes Length of cable: 49 ft Cable type: SEOW 600V Others: Net weight: 370 lb Country of origin: US Custom tariff no.: 8413.70.21

99030153 SL1.40.A60.75.EX.4.61R.C 60 Hz

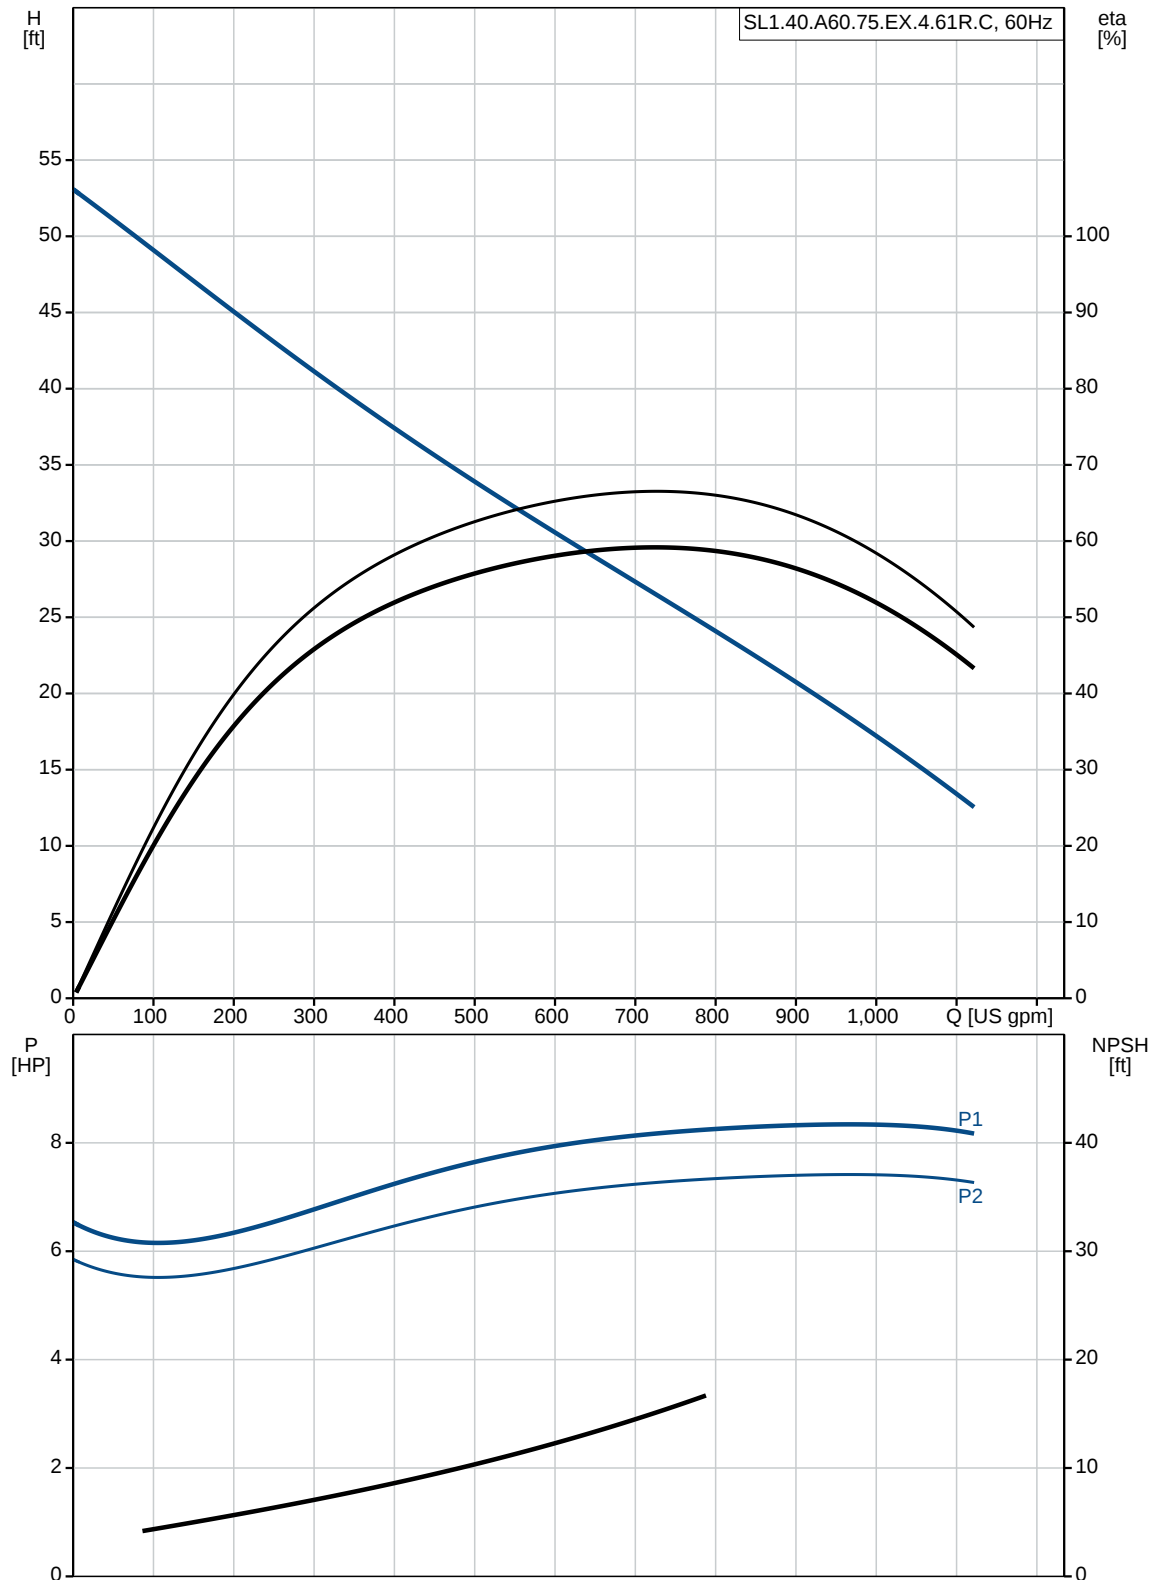

Date: 1/6/2020

Description	Value
General information:	
Product name:	SL1.40.A60.75.EX.4.61R.C
Product No.:	99030153
EAN:	5712605415909
	5712605415909
Price:	\$ 8,102.00
Technical:	
Max flow:	1120 US gpm
Head max:	53.15 ft
Type of impeller:	S-TUBE
Maximum particle size:	3 15/16 in
Primary shaft seal:	SIC/SIC
Secondary shaft seal:	CARBON/CERAMICS
Approvals on nameplate:	CSA, FM
Curve tolerance:	ANSI/HI11.6:2012 3B2
Cooling jacket:	without cooling jacket
Materials:	
Pump housing:	Cast iron
	EN 5.1301 EN-GJL-250
	ASTM A48-250B
Impeller:	Cast iron
	EN 5.1301 EN-GJL-250
	ASTM A48-250B
Motor:	EN-GJL-250
Installation:	
Maximum ambient temperature:	104 °F
Flange standard:	ANSI
Pump inlet:	150
Pump outlet:	150
Pressure stage:	PN 10
Maximum installation depth:	65.6 ft
Inst dry/wet:	SUBMERGED
Installation:	Vertical
Frame range:	C </td
Liquid:	
Pumped liquid:	any viscous fluid
Maximum liquid temperature:	104 °F
Density:	62.29 lb/ft ³
Electrical data:	
Power input - P1:	6.4 kW
Rated power - P2:	7.5 HP
Main frequency:	60 Hz
Rated voltage:	3 x 230/460 V
Voltage tolerance:	+10/-10 %
Max starts per. hour:	20
Rated current:	19.2/10.1 A
Starting current:	120 A
Cos phi - power factor:	0.87
Cos phi - p.f. at 3/4 load:	0.84
Cos phi - p.f. at 1/2 load:	0.77
Rated speed:	1750 rpm
Motor efficiency at full load:	88.9 %

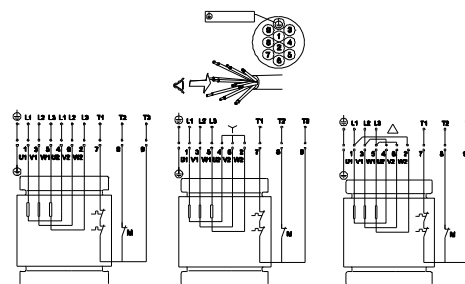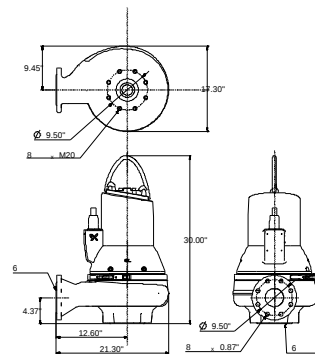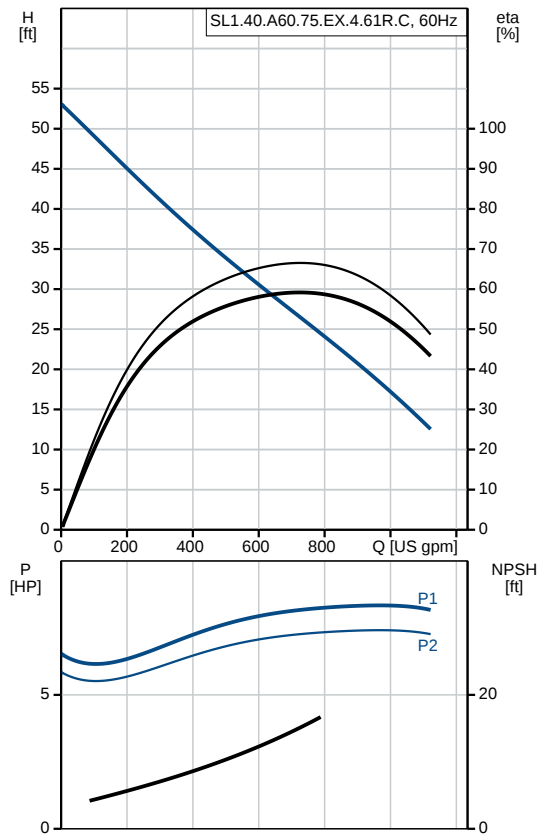




Company name: Hurley Engineering
Created by:
Phone:

Date: 1/6/2020


Description	Value
Motor efficiency at 3/4 load:	89.65 %
Motor efficiency at 1/2 load:	89.2 %
Number of poles:	4
Start. method:	star/delta
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	H
Explosion proof:	yes
Motor protection:	THERMAL SWITCH
Length of cable:	49 ft
Cable type:	SEOOW 600V
Controls:	
Control box:	not included
Moisture sensor:	with moisture sensors
Water-in-oil sensor:	without water-in-oil sensor
Others:	
Net weight:	370 lb
Country of origin:	US
Custom tariff no.:	8413.70.21

99030153 SL1.40.A60.75.EX.4.61R.C 60 Hz

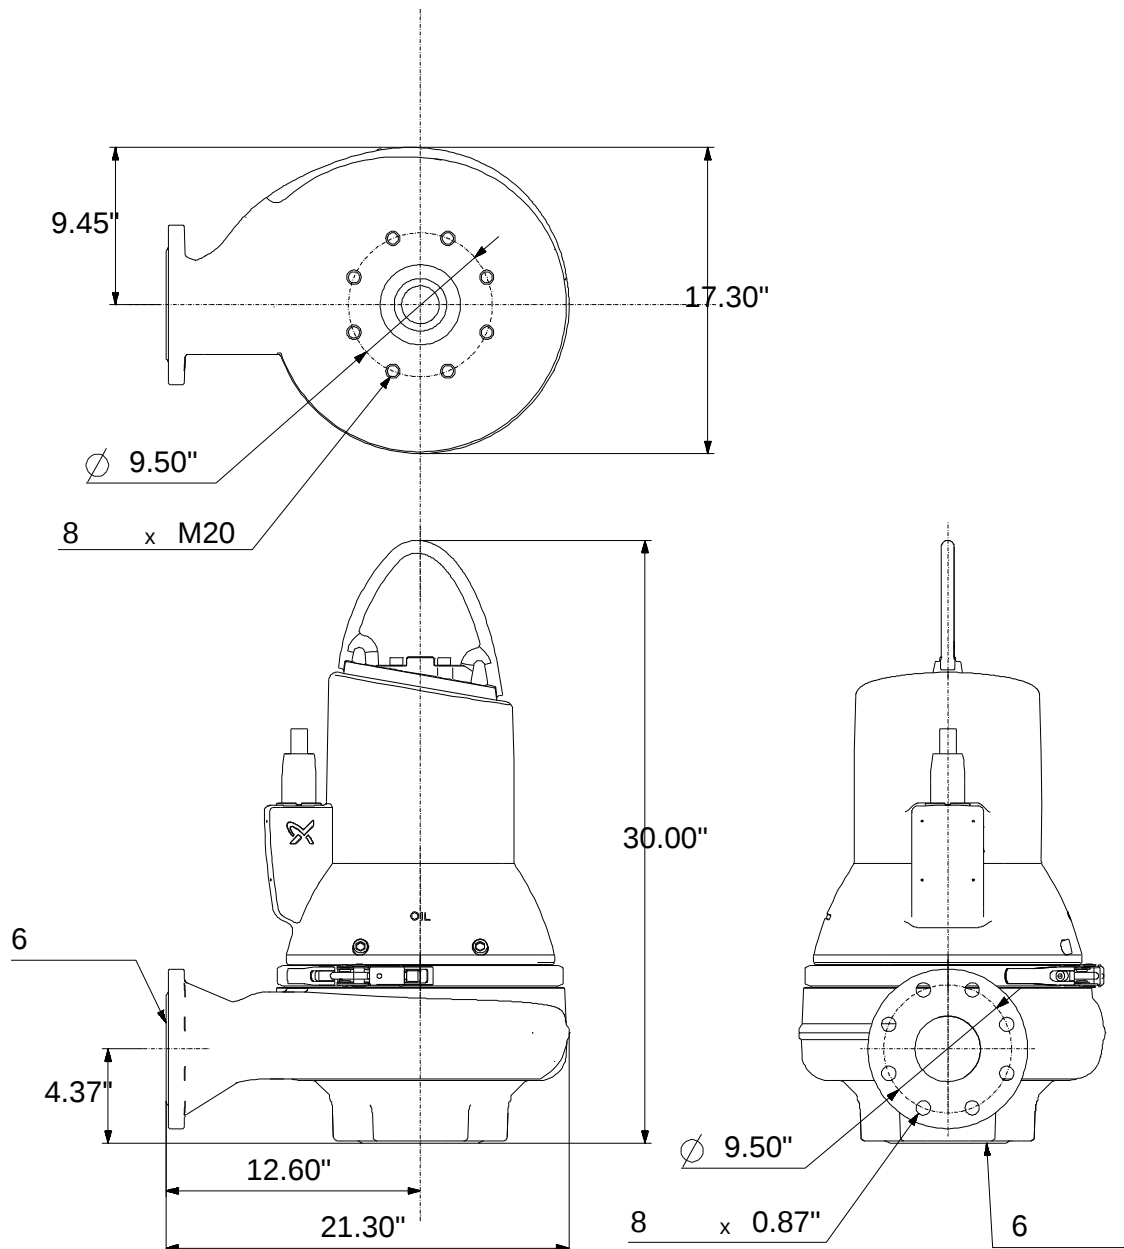


Note! All units are in [in] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.

99030153 SL1.40.A60.75.EX.4.61R.C 60 Hz

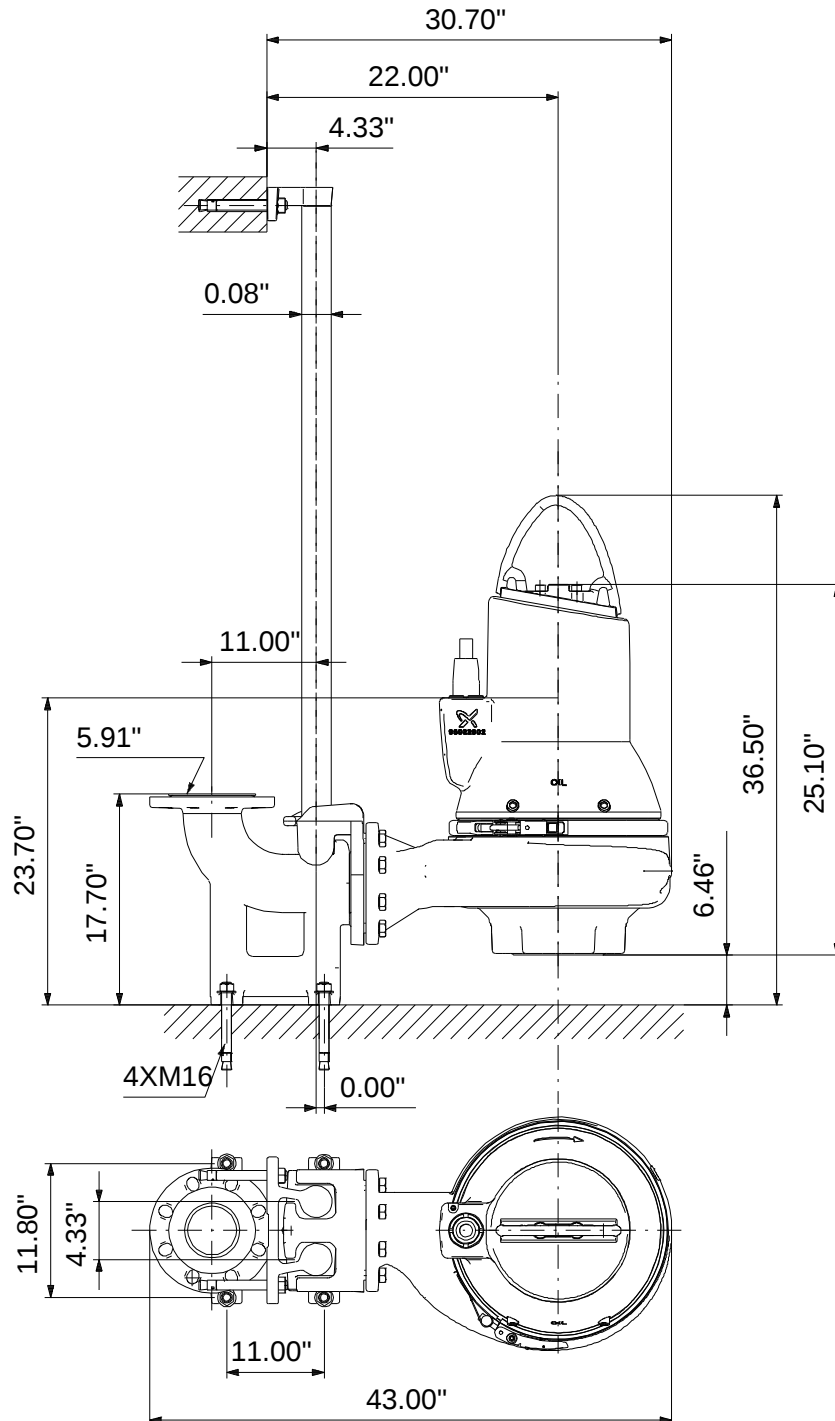


Note! All units are in [in] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.

99030153 SL1.40.A60.75.EX.4.61R.C 60 Hz

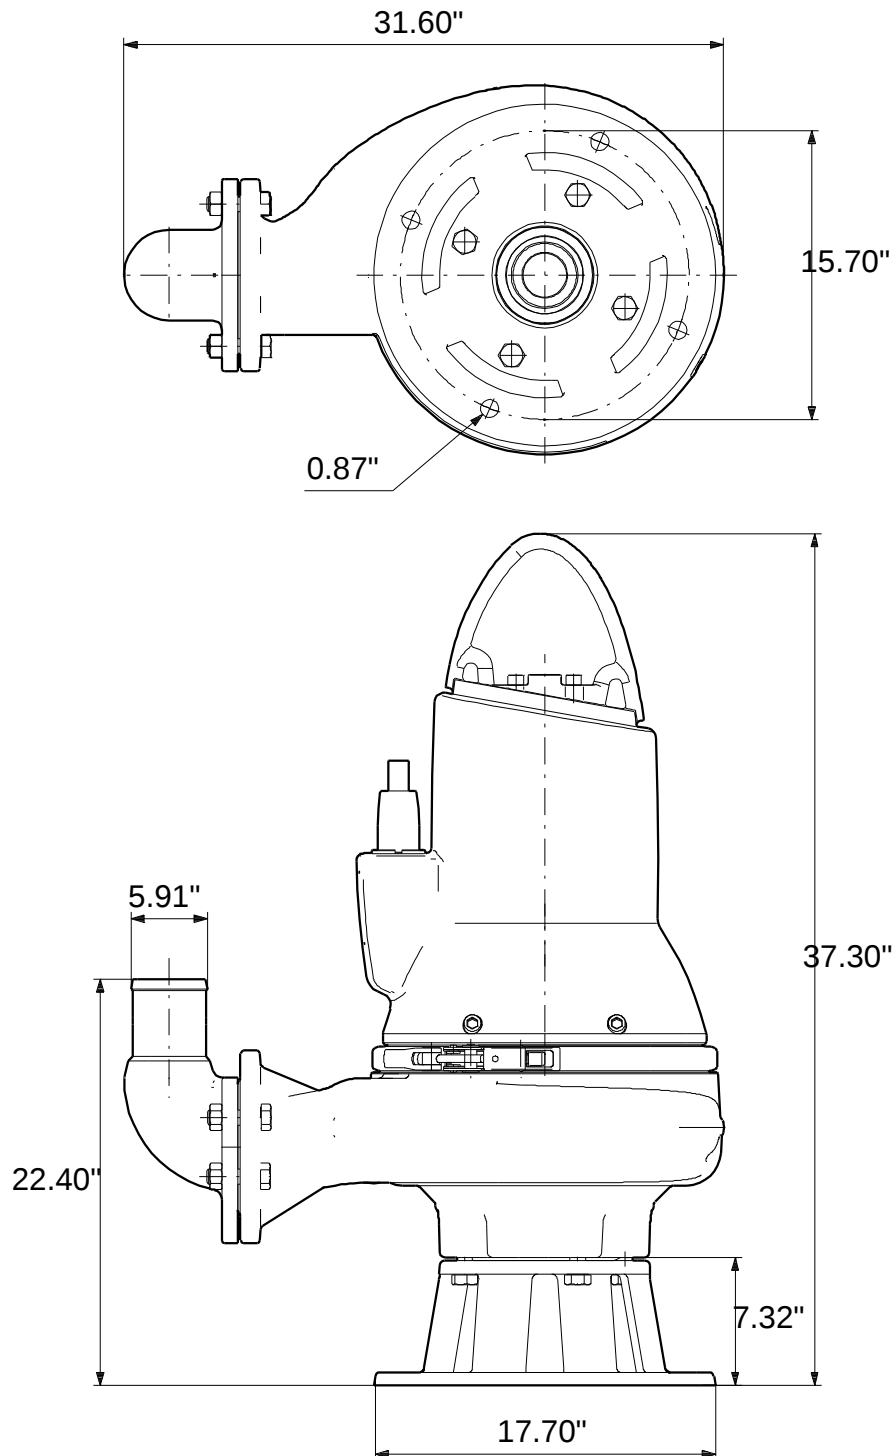

Note! All units are in [in] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.

99030153 SL1.40.A60.75.EX.4.61R.C 60 Hz

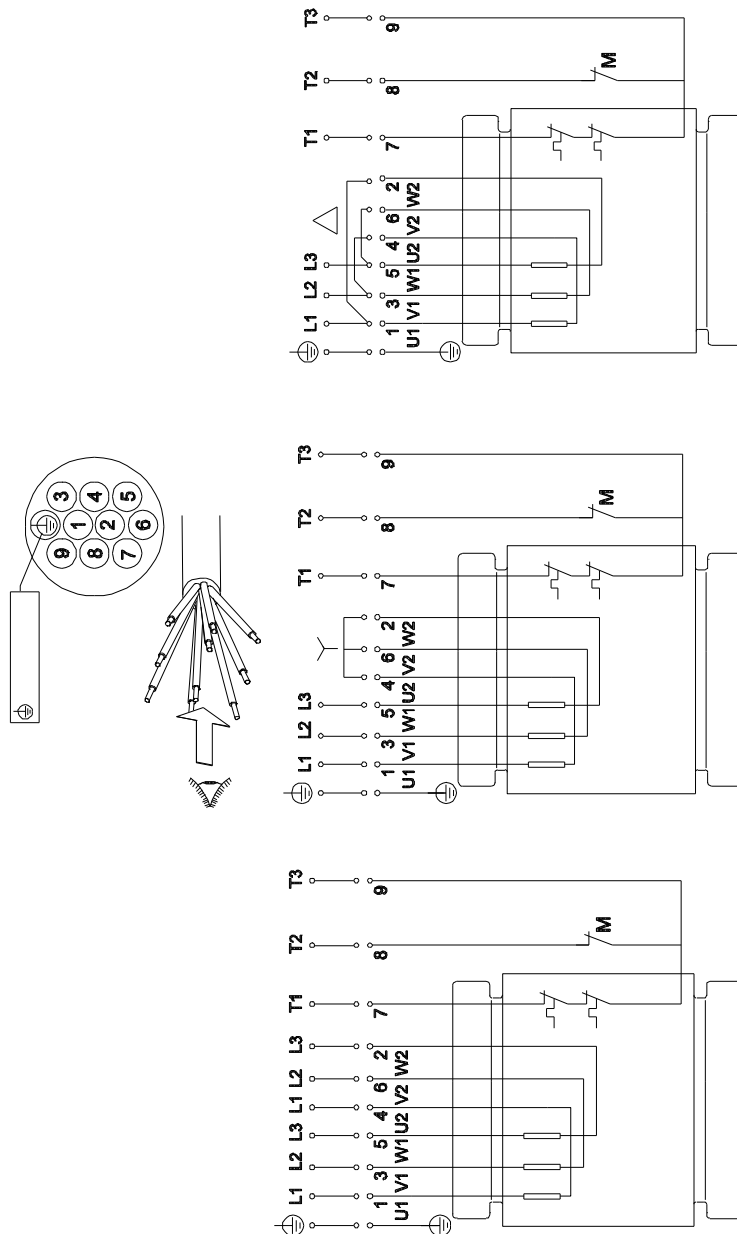

All units are [in] unless otherwise presented.