

Heavy-duty submersible sewage pumps from 1.5 to 15 HP

The Grundfos SEV and SE1 pumps are designed for handling wastewater, process water and unscreened raw sewage in heavy-duty municipal, utility and industrial applications.

Both these technologically very advanced series of pumps are available with efficient single-channel or SuperVortex impellers allowing for free passage of solids up to 4 in. This greatly reduces the risk of clogging and ensures maximum uptime and low operating costs.

The SEV and SE1 pumps can be used in permanent dry or submerged installations by means of an auto-coupling system or with a fixed pipe connection. They do not need separate motor cooling arrangements. The pumps are also suitable for freestanding installations or as portable pumps.

**GRUNDFOS
SEV&SE1**



UNIQUE BENEFITS

Non-stop operation

Unique liquidless motor cooling enables round-the-clock operation in dry and wet installations without motor modifications

Moisture-proof cable entry

The plug is filled with a two-component compound that prevents moisture entering the motor via the cable core

Cartridge shaft seal

The primary and secondary mechanical shaft seals are combined into a compact easy-to-replace cartridge unit.

Interchangeable motors

For maximum flexibility, the quick-detachable motor units are interchangeable and fit both channel-impeller and SuperVortex pumps.

Learn More



Advanced technology – inside out



Moisture-proof plug

A two-component sealant filling the plug prevents moisture from entering the motor via the cable core



Short rotor shaft

Compact motor construction reduces vibration to protect bearings



Double mechanical

shaft seal Primary and secondary seals are combined into a single cartridge to reduce maintenance time



Liquid-less motor cooling

Solid-block stator housing with cooling conduits allow for nonstop operation in submersible and dry installations



Heavy-duty ball bearings

Double row angular contact lower ball bearings protect the support bearing against upthrust and clogging vibrations



Easy-to-open clamp



Easy to access the pump for maintenance. Enables 180° rotation of the motor housing



Performance overview for SE pumps 1.5 -15 Hp 60Hz

SE1 pumps with S-tube® impeller are available with impellers for 2 inch , 3 inch and 4 inch free spherical passage.

SEV pumps with **SuperVortex** impeller are available with 2.5 inch, 3 inch and 4 inch free passage.

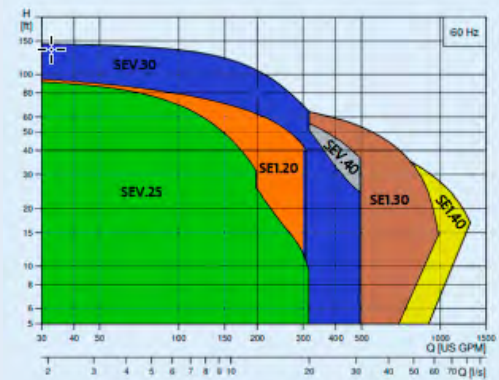

SuperVortex impeller

Ideal for liquids with high content of solids or fibres, or gassy sludge. SuperVortex-impeller pumps are available in three size ranges for free passage of solids of 2.5 in, 3 in or 4 in, respectively.



Channel impeller

Ideal for large flows of raw sewage. Channel-impeller pumps are available in three size ranges for free passage of solids of 2.5 in, 3 in or 4 in, respectively.

Grundfos Holding A/S
856 Koomey Rd
Brookshire, TX 77423
www.grundfos.com

GRUNDFOS

Possibility in every drop