

PROJECT:	Hurley Engineering Web Design Assist	UNIT TAG:	BP-1	QUANTITY:	1
REPRESENTATIVE:	Hurley Engineering Company	TYPE OF SERVICE:	Domestic Water	DATE:	
ENGINEER:	To Be Determined	SUBMITTED BY:	Devin Carle-Hurley Engineering	DATE:	
CONTRACTOR:	To Be Determined	APPROVED BY:		DATE:	
		ORDER NO.:	800-861-7122	DATE:	



Product photo could vary from the actual product


### HYDRO MULTI-B/E 3 CME5-5



Booster systems with frequency-controlled pumps



**HURLEY ENGINEERING**  
MANUFACTURERS REPRESENTATIVES

Conditions of Service		Pump Data		Motor Data	
Flow:	78 US gpm	Maximum operating pressure:	145 psi	Rated voltage:	460-480 V
Head:	180 ft	Liquid temperature range:	32 .. 140 °F	Main frequency:	60 Hz
Efficiency:	49.3 %	Pipe connection:	2NPT		
Liquid:	Water	Product number:	91149126		
Temperature:	68 °F				
NPSH required:	19.44 ft				
Viscosity:					
Specific Gravity:	1.000				

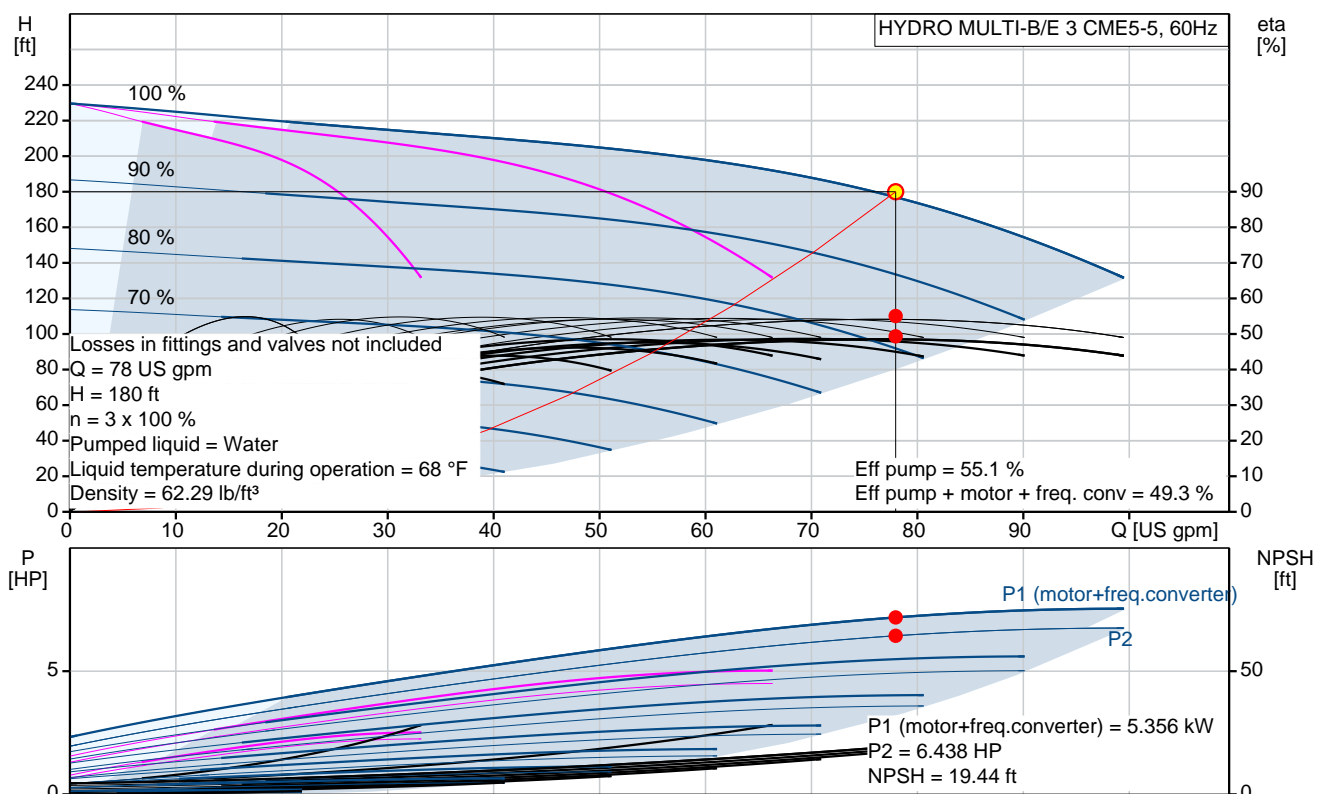

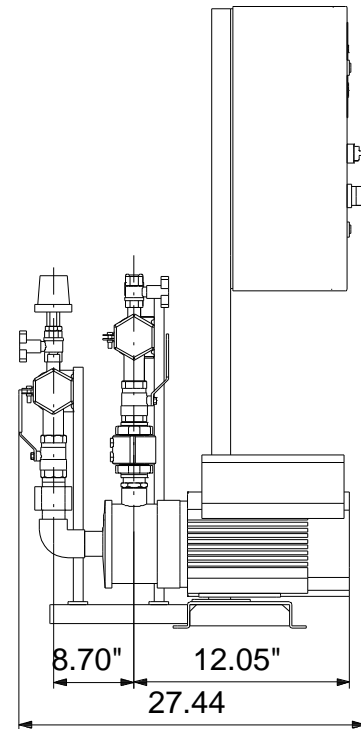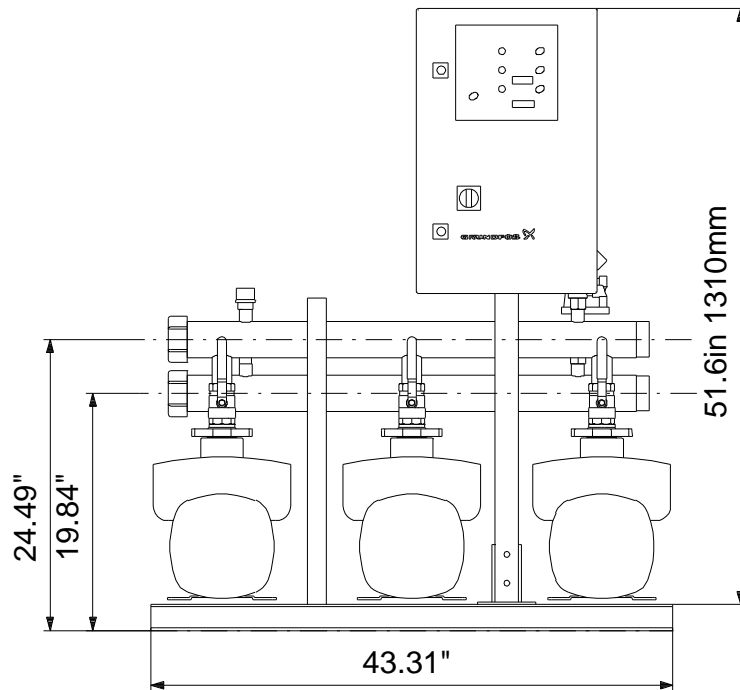


**Materials:**


Pump: EN-GJL-200

Manifolds: EN/DIN 1.4571/ AISI 316 TI

Count	Description
1	<p><b>HYDRO MULTI-B/E 3 CME5-5</b></p>  <p>Product photo could vary from the actual product</p> <p>Product No.: <a href="#">91149126</a></p> <p>Pressure booster system designed and manufactured by Grundfos. Delivered on a common base plate, completely assembled and tested before it leaves the factory and ready for connection of water and electricity.</p> <p>All pumps are Grundfos CME pumps with integrated frequency drives connected in parallel and operated in cascade.</p> <p>The booster maintains a constant pressure through continuous adjustment of speed of the pumps and starting and stopping the pumps to meet the required flow.</p> <p>The system consists of:</p> <ul style="list-style-type: none"> <li>-3 horizontal multistage pumps with integrated frequency converter, type CME5-5</li> <li>-A suction and a discharge manifold in EN/DIN 1.4571/ AISI 316 TI</li> <li>-One non-return valve per pump placed on the discharge side as standard.</li> <li>-Two isolating valves and a clamp ring per pump for easy service and inspection of the pumps.</li> <li>-Pressure sensor and gauge.</li> <li>-CU323 Pump controller for controlling parallel coupled pumps in cascade.</li> </ul> <p>Optional equipment:</p> <ul style="list-style-type: none"> <li>-Redundant Primary Sensor</li> <li>-Water Shortage Protection</li> <li>-Non return valve on suction side.</li> <li>-Communication Modules for LON, BACnet, Modbus and GSM</li> <li>-Phase Failure monitoring</li> <li>-Beacon</li> <li>-Audible alarm</li> <li>-External transformer</li> <li>-High / Low Level alarm</li> <li>-System in operation indicating lamp</li> <li>-Alarm indicating lamp</li> </ul> <p>Accessories:</p> <ul style="list-style-type: none"> <li>-Level Switch 5 meter cable</li> <li>-Level Switch 10 meter cable</li> <li>-Extra documentation</li> </ul> <p>Functions and features of the CU323 Pump controller:</p> <ul style="list-style-type: none"> <li>-Constant pressure control</li> <li>-Automatic cascade control</li> <li>-Automatic alternation between pumps</li> </ul>

Count	Description								
	<ul style="list-style-type: none"> <li>-Stop function</li> <li>-High Pressure Protection</li> <li>-Sensor Fault Protection</li> <li>-Motor Protection</li> <li>-Standby pumps</li> <li>-Automatic Display Lock</li> <li>-External Start / Stop (potential free contacts)</li> <li>-Easy to use HMI with 2 displays for set-point and process value</li> <li>-2 digital outputs,</li> <li>-Auto / manual control of pumps</li> <li>-Optional bus communication</li> <li>-Optional Safe Tank filling sequence</li> <li>-Optional monitoring of inlet pressure by means of inlet sensor</li> </ul> <p>Technical data:</p> <table> <tr> <td>Rated Flow:</td><td>74 US gpm</td></tr> <tr> <td>Rated Head:</td><td>182.4 ft</td></tr> <tr> <td>Liquid temperature:</td><td>0 – 140 °F</td></tr> <tr> <td>Max Pressure</td><td>: 145 psi</td></tr> </table> <p>Pump Material: EN-GJL-200  Shaft Seal: AQQE (SiC/SiC/EPDM)</p> <p>Mains Supply: 460-480 V</p> <p>Starting Method CME pump: electronically  Power of CME pump: 2 HP</p> <p>Size of manifold connection: 2NPT  Net Weight: 282 lb  Gross Weight: 505 lb</p>	Rated Flow:	74 US gpm	Rated Head:	182.4 ft	Liquid temperature:	0 – 140 °F	Max Pressure	: 145 psi
Rated Flow:	74 US gpm								
Rated Head:	182.4 ft								
Liquid temperature:	0 – 140 °F								
Max Pressure	: 145 psi								

## 91149126 HYDRO MULTI-B/E 3 CME5-5 60 Hz

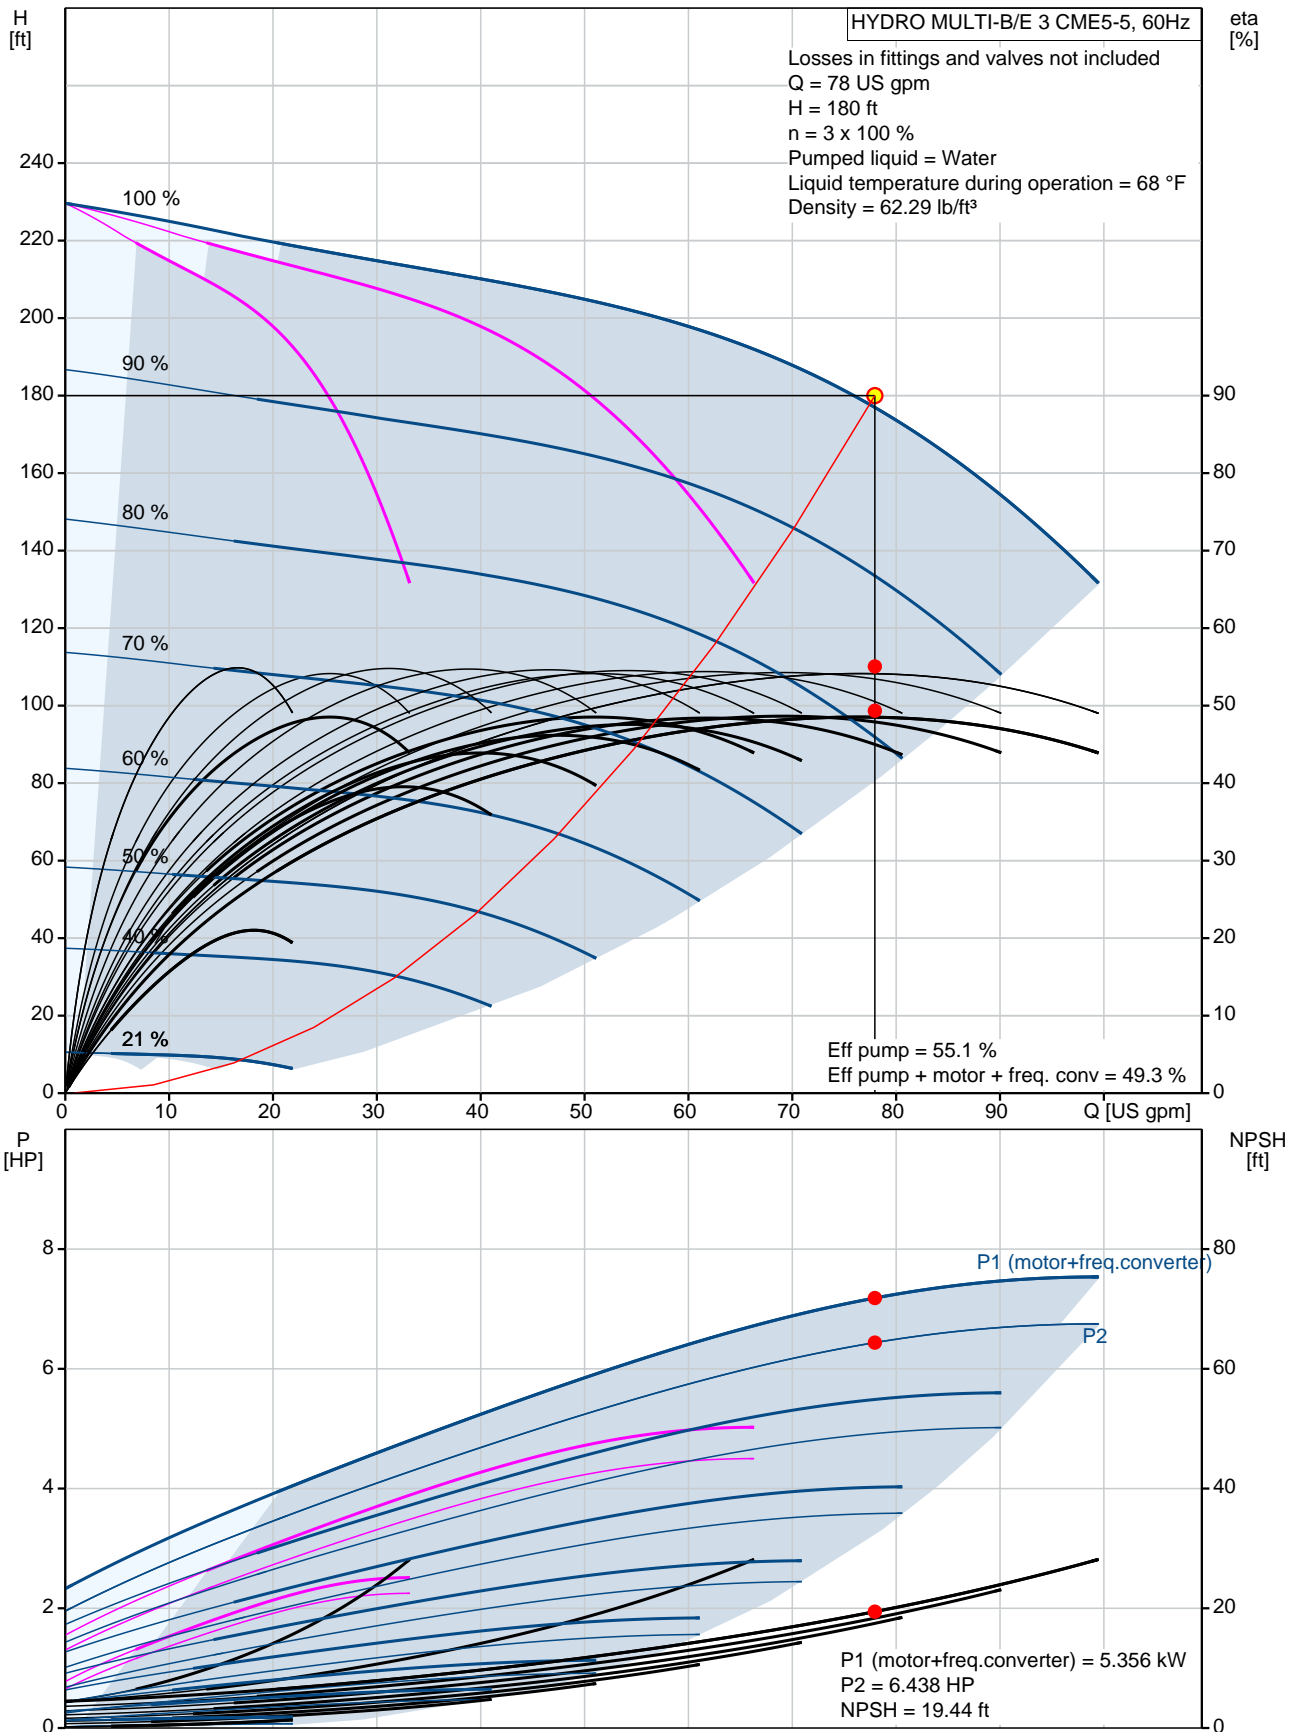

Description	Value
<b>General information:</b>	
Product name:	HYDRO MULTI-B/E 3 CME5-5
Product No.:	91149126
EAN:	5711490038774
<b>Technical:</b>	
Actual calculated flow:	78 US gpm
Min flow system:	7.04 US gpm
Resulting head of the pump:	180 ft
Head max:	219.2 ft
Main pump name:	CME5-5
Main pump Number:	98399402
Number of pumps:	3
Model:	A
<b>Materials:</b>	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
<b>Installation:</b>	
Maximum operating pressure:	145 psi
Pipe connection:	2NPT
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Power (P2) main pump:	2 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	8.7 A
<b>Controls:</b>	
Control type:	E
Operation unit:	CU323-3
<b>Tank:</b>	
Diaphragm tank:	No
<b>Others:</b>	
Net weight:	282 lb
Gross weight:	505 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

