

PROJECT:	Hurley Engineering Web Design Assist	UNIT TAG:	BP-1	QUANTITY:	1
REPRESENTATIVE:	Hurley Engineering Company	TYPE OF SERVICE:	Domestic Water	DATE:	_____
ENGINEER:	To Be Determined	SUBMITTED BY:	Devin Carle-Hurley Engineering	DATE:	_____
CONTRACTOR:	To Be Determined	APPROVED BY:	_____	DATE:	_____
		ORDER NO.:	800-861-7122	DATE:	_____



Product photo could vary from the actual product

HYDRO MULTI-B/E 2 CME10-2


Booster systems with frequency-controlled pumps





HURLEY ENGINEERING

MANUFACTURERS REPRESENTATIVES

Conditions of Service		Pump Data		Motor Data	
Flow:	120 US gpm	Maximum operating pressure:	145 psi	Rated voltage:	460-480 V
Head:	120 ft	Liquid temperature range:	32 .. 140 °F	Main frequency:	60 Hz
Efficiency:	58.1 %	Pipe connection:	2.5NPT		
Liquid:	Water	Product number:	91149127		
Temperature:	68 °F				
NPSH required:	16.16 ft				
Viscosity:	_____				
Specific Gravity:	1.000				

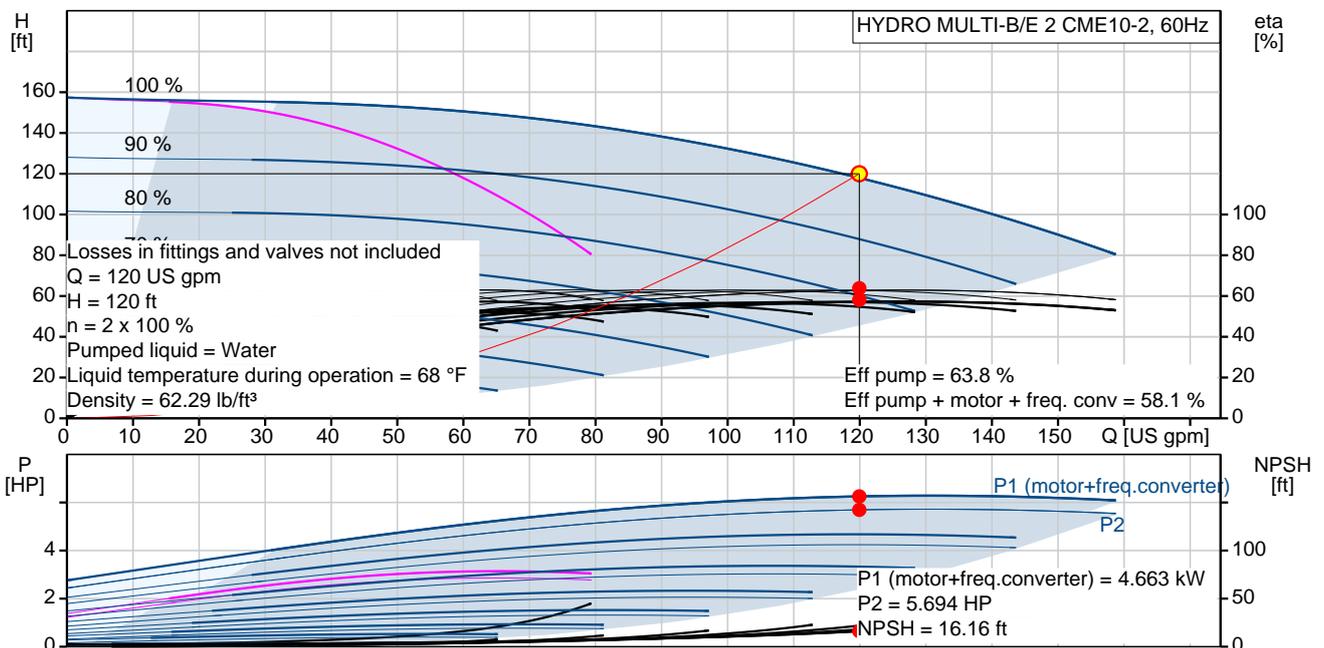

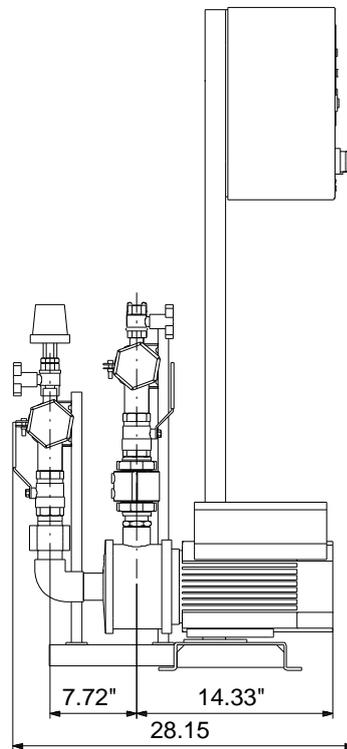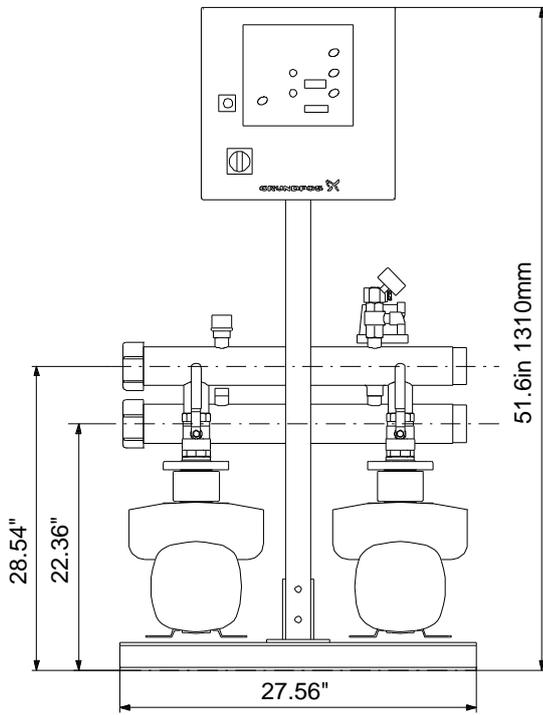

Materials:

Pump: EN-GJL-200

Manifolds: EN/DIN 1.4571/ AISI 316 TI

Count	Description
1	<p data-bbox="225 342 582 369">HYDRO MULTI-B/E 2 CME10-2</p>  <p data-bbox="619 965 1072 992">Product photo could vary from the actual product</p> <p data-bbox="225 999 1465 1106">Product No.: 91149127 Pressure booster system designed and manufactured by Grundfos. Delivered on a common base plate, completely assembled and tested before it leaves the factory and ready for connection of water and electricity.</p> <p data-bbox="225 1144 1465 1193">All pumps are Grundfos CME pumps with integrated frequency drives connected in parallel and operated in cascade.</p> <p data-bbox="225 1232 1465 1281">The booster maintains a constant pressure through continuous adjustment of speed of the pumps and starting and stopping the pumps to meet the required flow.</p> <p data-bbox="225 1319 486 1346">The system consists of:</p> <ul data-bbox="225 1379 1262 1554" style="list-style-type: none">-2 horizontal multistage pumps with integrated frequency converter, type CME10-2-A suction and a discharge manifold in EN/DIN 1.4571/ AISI 316 TI-One non-return valve per pump placed on the discharge side as standard.-Two isolating valves and a clamp ring per pump for easy service and inspection of the pumps.-Pressure sensor and gauge.-CU323 Pump controller for controlling parallel coupled pumps in cascade. <p data-bbox="225 1588 448 1615">Optional equipment:</p> <ul data-bbox="225 1621 914 1939" style="list-style-type: none">-Redundant Primary Sensor-Water Shortage Protection-Non return valve on suction side.-Communication Modules for LON, BACnet, Modbus and GSM-Phase Failure monitoring-Beacon-Audible alarm-External transformer-High / Low Level alarm-System in operation indicating lamp-Alarm indicating lamp <p data-bbox="225 1973 368 2000">Accessories:</p> <ul data-bbox="225 2007 547 2092" style="list-style-type: none">-Level Switch 5 meter cable-Level Switch 10 meter cable-Extra documentation



Company name:

Created by:



Phone:

Date:

2/8/2019

Count	Description								
	<p>Functions and features of the CU323 Pump controller:</p> <ul style="list-style-type: none">-Constant pressure control-Automatic cascade control-Automatic alternation between pumps-Stop function-High Pressure Protection-Sensor Fault Protection-Motor Protection-Standby pumps-Automatic Display Lock-External Start / Stop (potential free contacts)-Easy to use HMI with 2 displays for set-point and process value-2 digital outputs,-Auto / manual control of pumps-Optional bus communication-Optional Safe Tank filling sequence-Optional monitoring of inlet pressure by means of inlet sensor <p>Technical data:</p> <table><tr><td>Rated Flow:</td><td>106 US gpm</td></tr><tr><td>Rated Head:</td><td>128 ft</td></tr><tr><td>Liquid temperature:</td><td>0 – 140 °F</td></tr><tr><td>Max Pressure</td><td>: 145 psi</td></tr></table> <p>Pump Material: EN-GJL-200 Shaft Seal: AQQE (SiC/SiC/EPDM)</p> <p>Mains Supply: 460-480 V</p> <p>Starting Method CME pump: electronically Power of CME pump: 3 HP</p> <p>Size of manifold connection: 2.5NPT Net Weight: 264 lb Gross Weight: 486 lb</p>	Rated Flow:	106 US gpm	Rated Head:	128 ft	Liquid temperature:	0 – 140 °F	Max Pressure	: 145 psi
Rated Flow:	106 US gpm								
Rated Head:	128 ft								
Liquid temperature:	0 – 140 °F								
Max Pressure	: 145 psi								

91149127 HYDRO MULTI-B/E 2 CME10-2 60 Hz

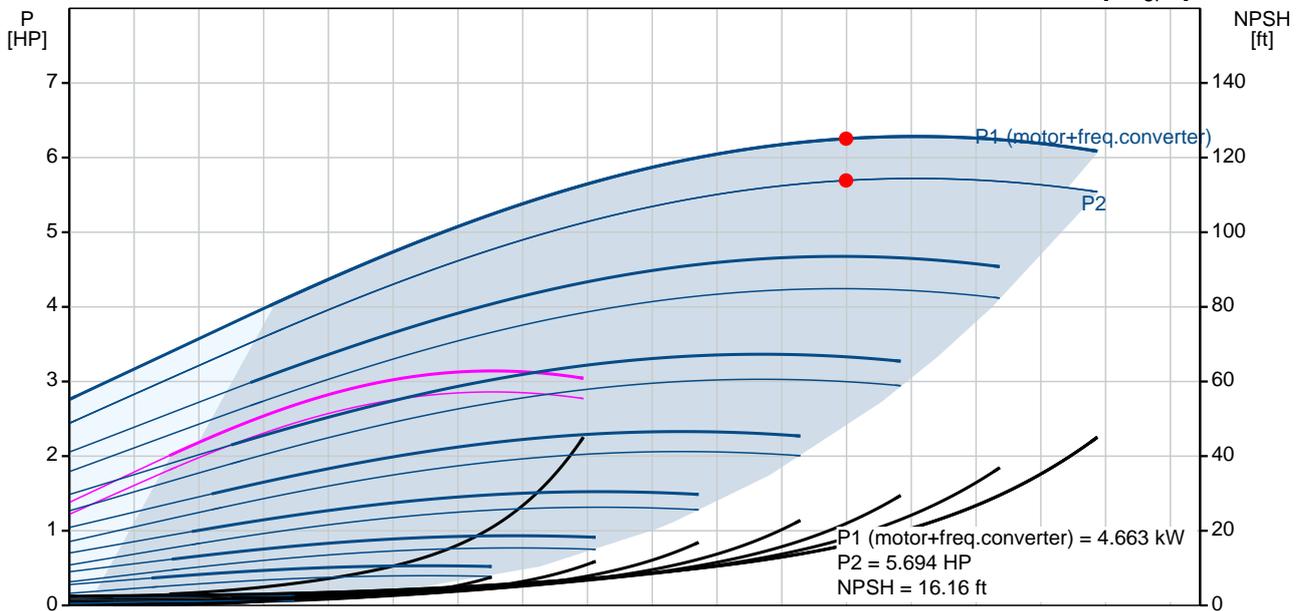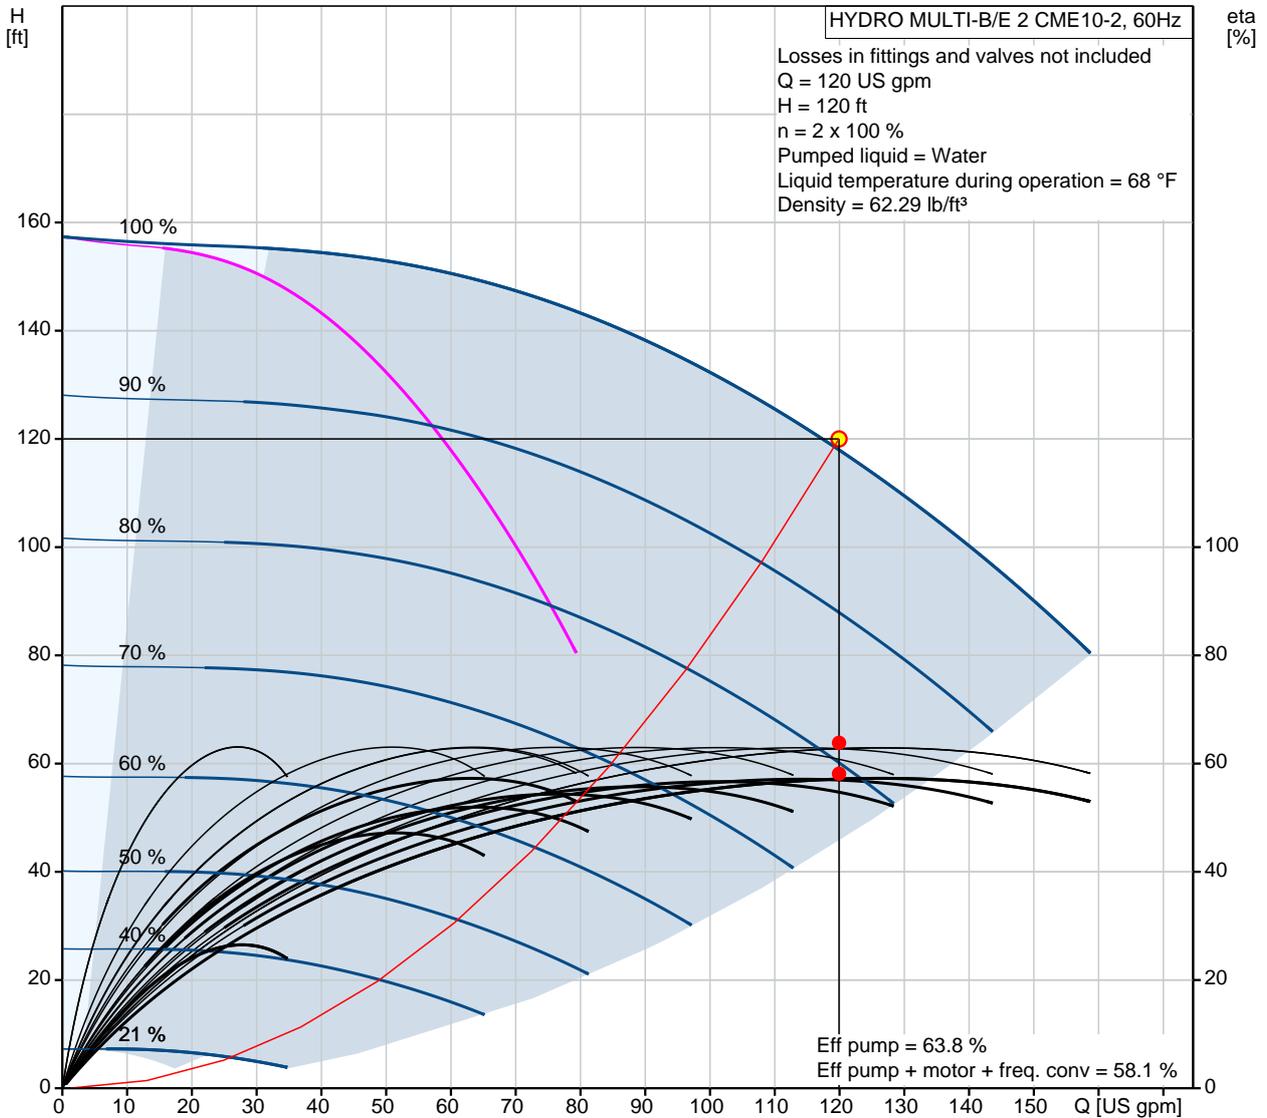

Description	Value
General information:	
Product name:	HYDRO MULTI-B/E 2 CME10-2
Product No.:	91149127
EAN:	5711490041378
Technical:	
Actual calculated flow:	120 US gpm
Min flow system:	15.9 US gpm
Resulting head of the pump:	120 ft
Head max:	150.9 ft
Main pump name:	CME10-2
Main pump Number:	98396737
Number of pumps:	2
Model:	A
Materials:	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
Installation:	
Maximum operating pressure:	145 psi
Pipe connection:	2.5NPT
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
Electrical data:	
Power (P2) main pump:	3 HP
Main frequency:	60 Hz
Rated voltage:	3 x 460-480 V
Starting main:	electronically
Rated current of system:	8.5 A
Controls:	
Control type:	E
Operation unit:	CU323-2
Tank:	
Diaphragm tank:	No
Others:	
Net weight:	264 lb
Gross weight:	486 lb
Product range:	NAMREG
Custom tariff no.:	8413.70.2040

