

PROJECT:	Hurley Engineering Web Design Assist	UNIT TAG:	BP-1	QUANTITY:	1
REPRESENTATIVE:	Hurley Engineering Company	TYPE OF SERVICE:	Domestic Water	DATE:	
ENGINEER:	To Be Determined	SUBMITTED BY:	Devin Carle-Hurley Engineering	DATE:	
CONTRACTOR:	To Be Determined	APPROVED BY:		DATE:	
		ORDER NO.:	800-861-7122	DATE:	



Product photo could vary from the actual product

HYDRO MULTI-B/E 3 CME25-2

Booster systems with frequency-controlled pumps






HURLEY ENGINEERING
MANUFACTURERS REPRESENTATIVES

The Pacific Northwest's premier Grundfos CBS Manufacturer's Representative for all Grundfos Booster systems. Hurley Engineering offers complete start up, selection & installation assistance, and has a full staff of service technicians available for preventive maintenance programs. Hurley Engineering is also the Pacific Northwest's only Grundfos CBS Authorized Service Partner.

1-800-861-7122

Conditions of Service	Pump Data	Motor Data
Flow: 360 US gpm	Maximum operating pressure: 145 psi	Rated voltage: 440-480 V
Head: 150 ft	Liquid temperature range: 32 .. 140 °F	Main frequency: 60 Hz
Efficiency: 62.9 %	Pipe connection: 4ANSI	
Liquid: Water	Product number: 99184385	
Temperature: 68 °F		
NPSH required: 30.42 ft		
Viscosity: _____		
Specific Gravity: 1.000		

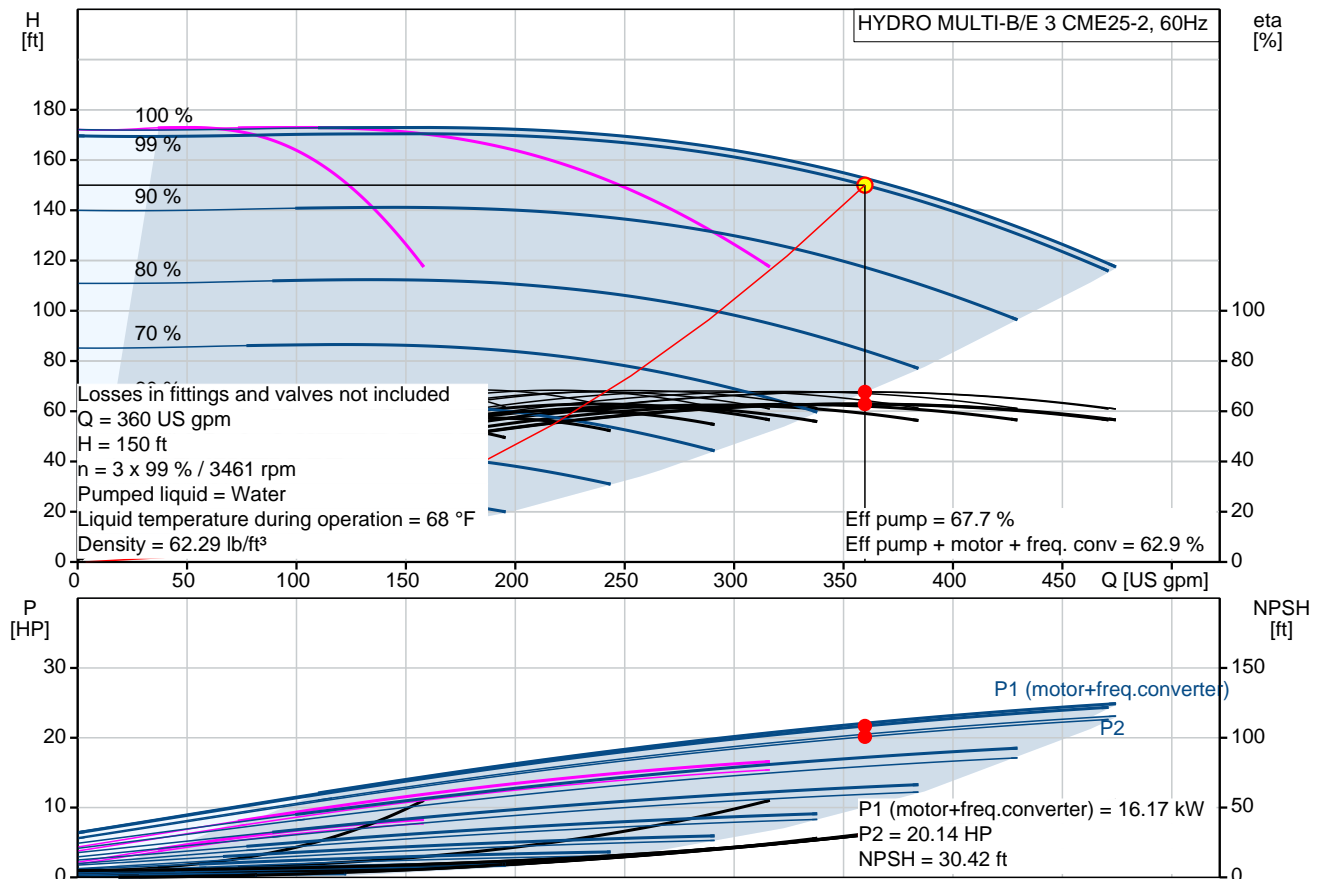

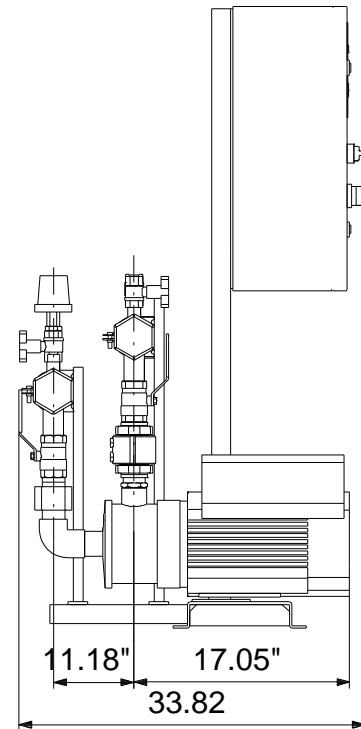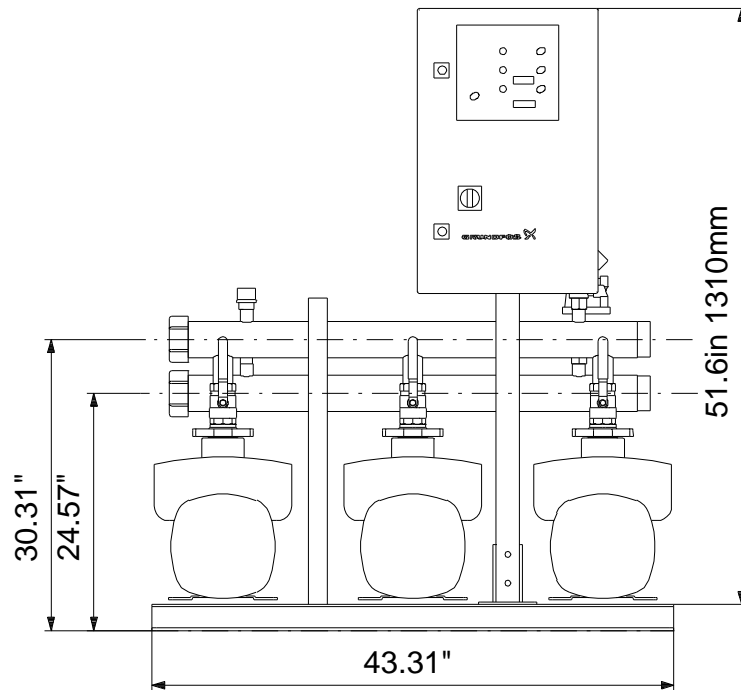


Materials:

Pump: EN-GJL-200

Manifolds: EN/DIN 1.4571/ AISI 316 TI

Count	Description
1	<p>HYDRO MULTI-B/E 3 CME25-2</p>  <p>Product photo could vary from the actual product</p> <p>Product No.: 99184385</p> <p>Pressure booster system designed and manufactured by Grundfos. Delivered on a common base plate, completely assembled and tested before it leaves the factory and ready for connection of water and electricity.</p> <p>All pumps are Grundfos CME pumps with integrated frequency drives connected in parallel and operated in cascade.</p> <p>The booster maintains a constant pressure through continuous adjustment of speed of the pumps and starting and stopping the pumps to meet the required flow.</p> <p>The system consists of:</p> <ul style="list-style-type: none"> -3 horizontal multistage pumps with integrated frequency converter, type CME25-2 -A suction and a discharge manifold in EN/DIN 1.4571/ AISI 316 TI -One non-return valve per pump placed on the discharge side as standard. -Two isolating valves and a clamp ring per pump for easy service and inspection of the pumps. -Pressure sensor and gauge. -CU323 Pump controller for controlling parallel coupled pumps in cascade. <p>Optional equipment:</p> <ul style="list-style-type: none"> -Redundant Primary Sensor -Water Shortage Protection -Non return valve on suction side. -Communication Modules for LON, BACnet, Modbus and GSM -Phase Failure monitoring -Beacon -Audible alarm -External transformer -High / Low Level alarm -System in operation indicating lamp -Alarm indicating lamp <p>Accessories:</p> <ul style="list-style-type: none"> -Level Switch 5 meter cable -Level Switch 10 meter cable -Extra documentation <p>Functions and features of the CU323 Pump controller:</p> <ul style="list-style-type: none"> -Constant pressure control -Automatic cascade control -Automatic alternation between pumps -Stop function -High Pressure Protection -Sensor Fault Protection



Company name:

Created by:


Phone:

Date:

2/8/2019

Count	Description								
	<ul style="list-style-type: none">-Motor Protection-Standby pumps-Automatic Display Lock-External Start / Stop (potential free contacts)-Easy to use HMI with 2 displays for set-point and process value-2 digital outputs,-Auto / manual control of pumps-Optional bus communication-Optional Safe Tank filling sequence-Optional monitoring of inlet pressure by means of inlet sensor <p>Technical data:</p> <table><tr><td>Rated Flow:</td><td>349 US gpm</td></tr><tr><td>Rated Head:</td><td>154.2 ft</td></tr><tr><td>Liquid temperature:</td><td>0 – 140 °F</td></tr><tr><td>Max Pressure</td><td>: 145 psi</td></tr></table> <p>Pump Material: EN-GJL-200 Shaft Seal: AQQE (SiC/SiC/EPDM)</p> <p>Mains Supply: 440-480 V</p> <p>Starting Method CME pump: electronically Power of CME pump: 7.51 HP</p> <p>Size of manifold connection: 4ANSI Net Weight: 679 lb Gross Weight: 902 lb</p>	Rated Flow:	349 US gpm	Rated Head:	154.2 ft	Liquid temperature:	0 – 140 °F	Max Pressure	: 145 psi
Rated Flow:	349 US gpm								
Rated Head:	154.2 ft								
Liquid temperature:	0 – 140 °F								
Max Pressure	: 145 psi								

99184385 HYDRO MULTI-B/E 3 CME25-2 60 Hz

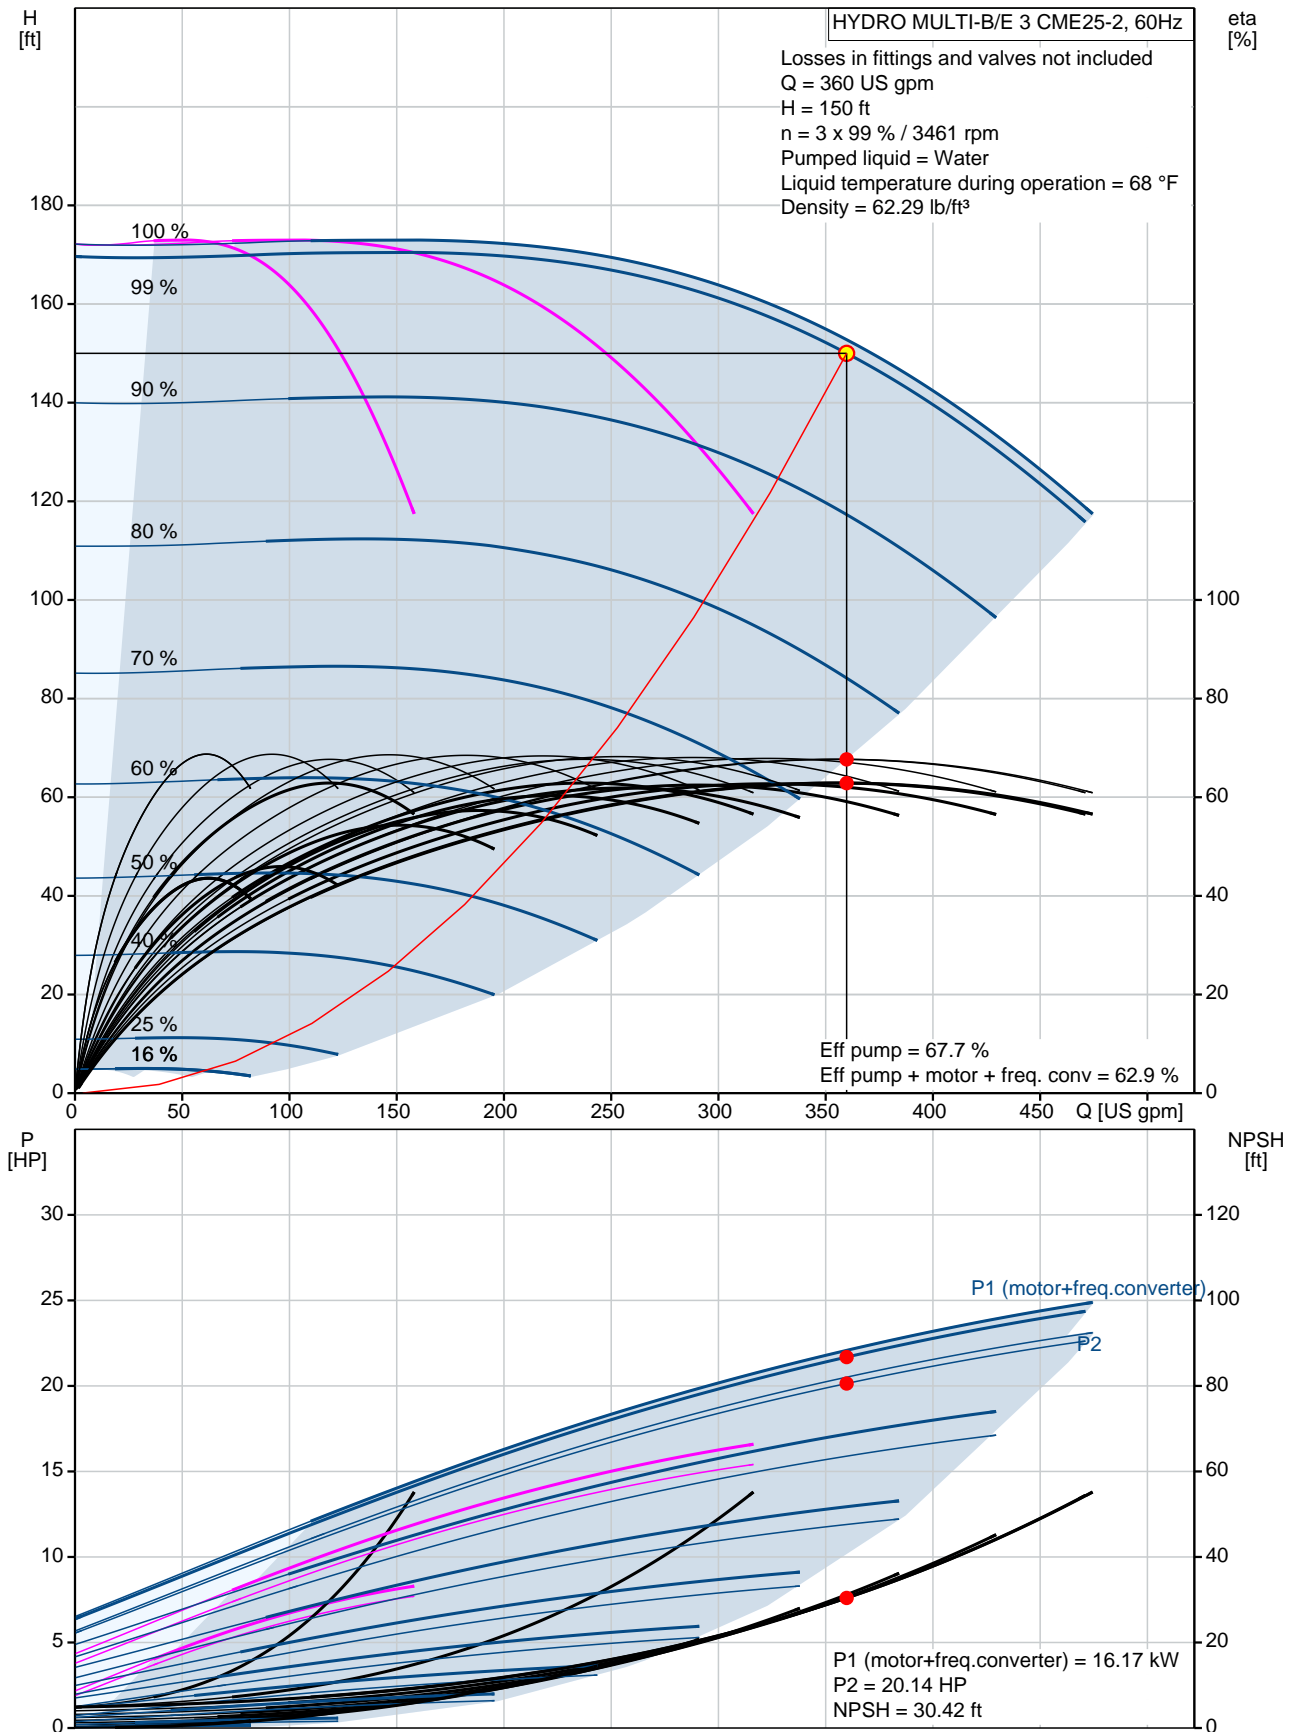

Description	Value
General information:	
Product name:	HYDRO MULTI-B/E 3 CME25-2
Product No.:	99184385
EAN:	5712608283383
Technical:	
Actual calculated flow:	360 US gpm
Min flow system:	26.4 US gpm
Resulting head of the pump:	150 ft
Head max:	163.7 ft
Main pump name:	CME25-2
Main pump Number:	99077778
Number of pumps:	3
Model:	A
Materials:	
Pump:	EN-GJL-200
Manifolds:	EN/DIN 1.4571/ AISI 316 TI
Installation:	
Maximum operating pressure:	145 psi
Pipe connection:	4ANSI
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	32 .. 140 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
Electrical data:	
Power (P2) main pump:	7.51 HP
Main frequency:	60 Hz
Rated voltage:	3 x 440-480 V
Starting main:	electronically
Rated current of system:	26.7 A
Controls:	
Control type:	E
Operation unit:	CU323-3
Tank:	
Diaphragm tank:	No
Others:	
Net weight:	679 lb
Gross weight:	902 lb
Product range:	NAMREG

