
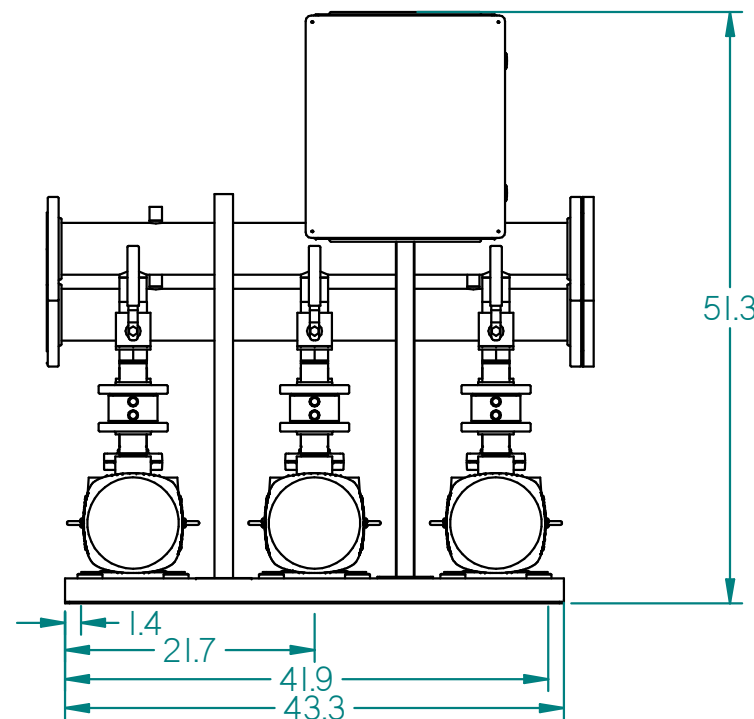
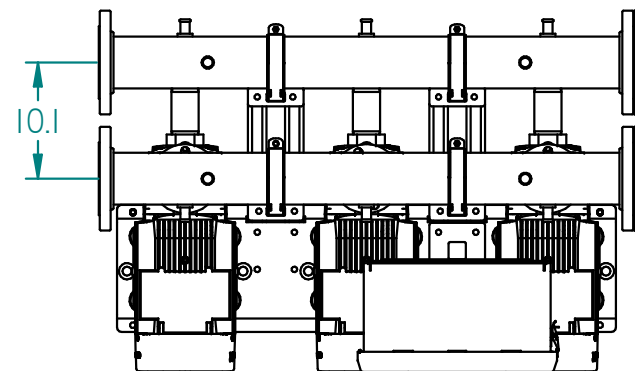


1. Manifolds 4" ANSI Class 150 AISI 316SS
Schedule 10s ASTM A312 or $\varnothing 114.3\text{mm} \times 2\text{mm}$.
2. Base/Frame AISI 304SS
3. 2" NPT Ball Valve for pump isolation.
4. UL Type 12 rated electrical panel. Panel size may vary.

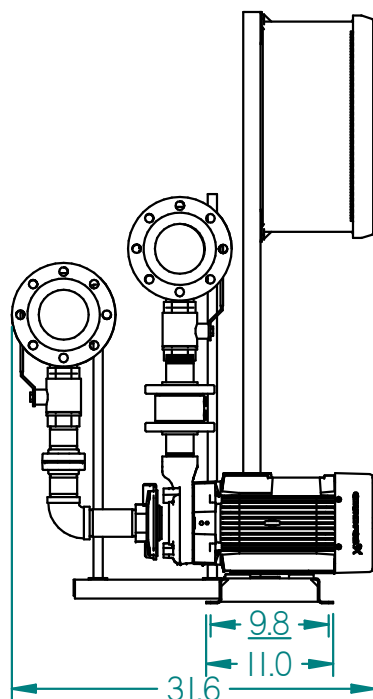

GRUNDFOS 

FRESNO, CALIFORNIA 93727 USA

Note:
All dimensions are $\pm 0.5"$
Not for construction use.
All dimensions subject to change
without notice.

BoosterpaQ Model: Hydro Multi-B/E 3CME25-2

Power: 7.5HP 3x460V 60 HZ

Job:

Dwg No:

Rev: 0

Date: 02/01/2016

Drawer: 58847

Page: 1 of 1