

PROJECT:	Hurley Engineering-TPE3 READY TO SHIP	UNIT TAG:	_____	QUANTITY:	1
REPRESENTATIVE:	Hurley Engineering	TYPE OF SERVICE:	_____	DATE:	2/10/2020
ENGINEER:	_____	SUBMITTED BY:	Devin Carle	DATE:	_____
CONTRACTOR:	To Be Determined	APPROVED BY:	_____	DATE:	_____
		ORDER NO.:	_____	DATE:	_____






Product photo could vary from the actual product

### TPE3 80-40 S-A-G-I-BQQE-CCA

Single-stage stainless steel in-line pumps with frequency converters

Conditions of Service	Pump Data	Motor Data
Flow: 111 US gpm	Liquid temperature range: -13 .. 248 °F	Rated power - P2: 0.33 HP
Head: 9.345 ft	Maximum ambient temperature: 122 °F	Rated voltage: 440-480 V
Efficiency: 66.9 %	Shaft seal: BQQE	Main frequency: 60 Hz
Liquid: Water	Pipe connection: DN 80	Number of poles: 0
Temperature: 68 °F	Product number: 98819908	Enclosure class: IP55
NPSH required: 5.9 ft		Insulation class: F
Viscosity: _____		Motor protection: YES
Specific Gravity: 1.000		Motor type: 71A
		Motor_efficiency: 84.8 %

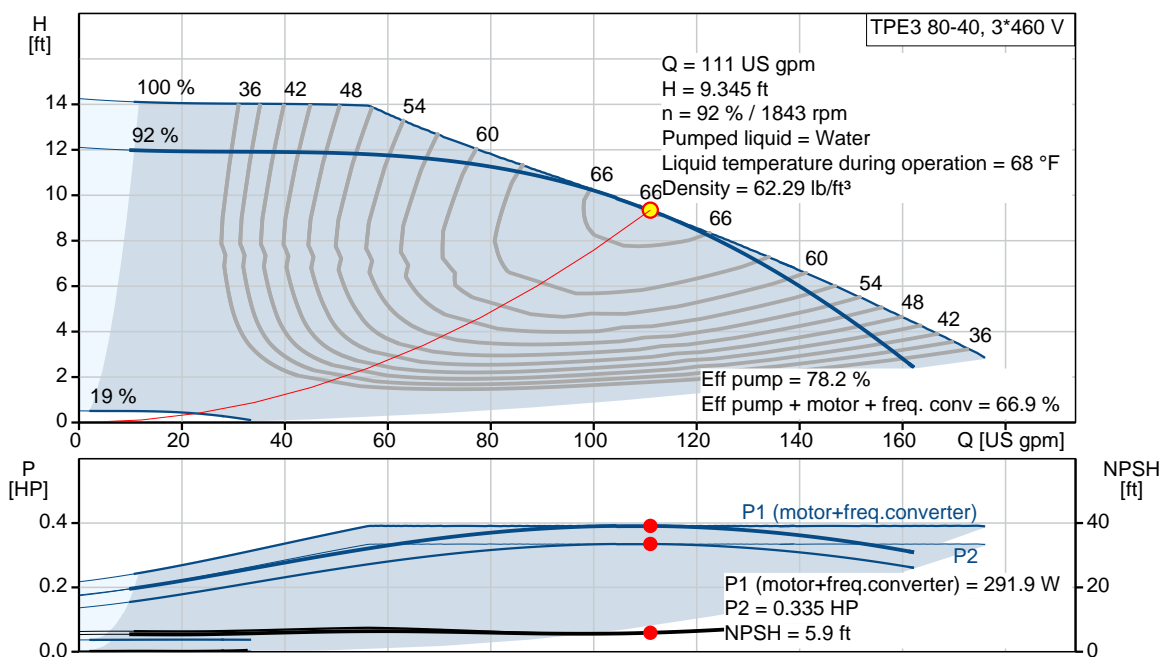

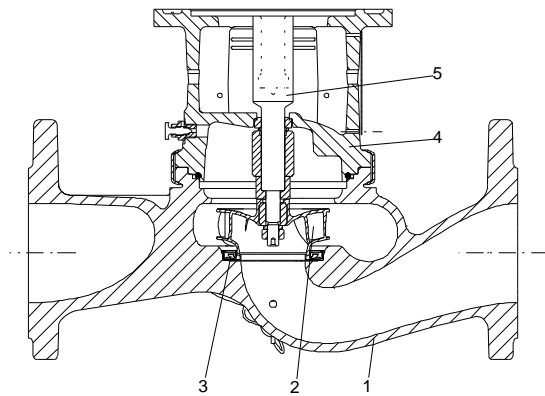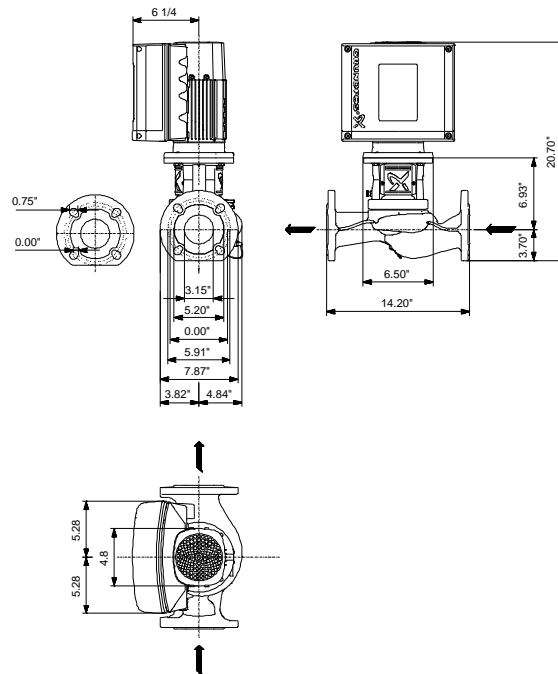

**Materials:**


Pump housing: Stainless steel  
ASTM CF8

Impeller: Composite PES/PP 30%  
GF

Material code: I

Project:  
Reference number:

Client:  
Client number:  
Contact:

Count	Description
1	<p><b>TPE3 80-40 S-A-G-I-BQQE-CCA</b></p>  <p>Product No.: <a href="#">98819908</a></p> <p>The pump is of the top-pull-out design, i.e. the power head (motor, pump head and impeller) can be removed for maintenance or service while the pump housing remains in the pipework. The shaft seal is according to EN 12756. Pipework connection is via PN 16 ANSI flanges. Pipework connection is via PN 16 ANSI flanges. The pump is fitted with a fan-cooled, permanent-magnet synchronous motor. The motor efficiency is classified as IE5 in accordance with IEC 60034-30-2. The motor includes a frequency converter and PI controller in the motor terminal box. This enables continuously variable control of the motor speed, which again enables adaptation of the performance to a given requirement.</p> <p><b>Controls:</b> Frequency converter: Built-in</p> <p><b>Liquid:</b> Pumped liquid: Water Liquid temperature range: -13 .. 248 °F Selected liquid temperature: 68 °F Density: 62.29 lb/ft³</p> <p><b>Technical:</b> Pump speed on which pump data is based: 1860 rpm Actual calculated flow: 111 US gpm Resulting head of the pump: 9.345 ft Actual impeller diameter: 3.54 in Code for shaft seal: BQQE Curve tolerance: ISO9906:2012 3B2</p> <p><b>Materials:</b> Pump housing: Stainless steel ASTM CF8 EN 1.4308 Impeller: Composite PES/PP 30% GF</p> <p><b>Installation:</b> Range of ambient temperature: -4 .. 122 °F Maximum operating pressure: PN 16 bar Type of connection: ANSI</p>



Company name: Hurley Engineering  
Created by:  
Phone:

Date: 2/26/2020

Project:  
Reference number:

Client:  
Client number:  
Contact:

Count	Description
	Pipe connection: DN 80 Pressure rating for pipe connection: PN 16 Flange size for motor: 56C  <b>Electrical data:</b> Motor type: 71A IE Efficiency class: IE5 Rated power - P2: 0.33 HP Main frequency: 60 Hz Rated voltage: 3 x 440-480 V Rated current: 0.8 A Cos phi - power factor: 0.53 Rated speed: 180-2000 rpm IE efficiency: 84.8% Motor efficiency at full load: 84.8 % Number of poles: 0 Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Motor Number: 99630337  <b>Others:</b> Net weight: 65.9 lb Gross weight: 85.1 lb Country of origin: HU Custom tariff no.: 8413.70.2022




Company name: Hurley Engineering  
Created by:  
Phone:

Date: 2/26/2020

Project:  
Reference number:

Client:  
Client number:  
Contact:





## 98819908 TPE3 80-40 S-A-G-I-BQQE-CCA 60 Hz

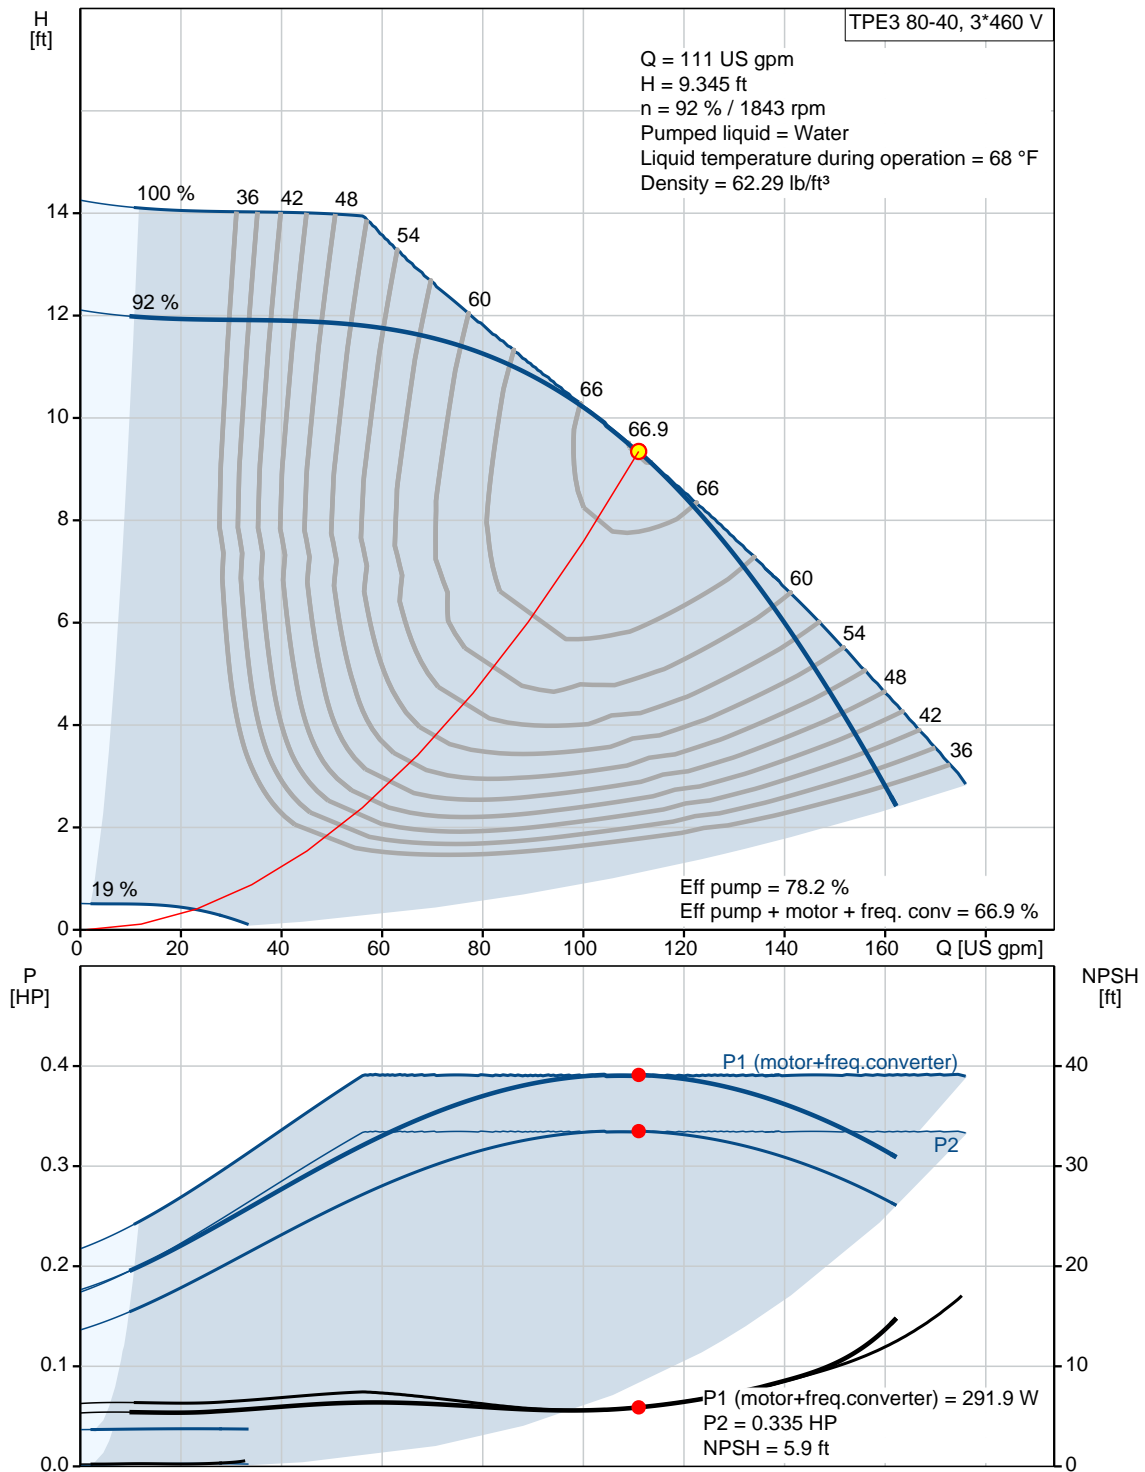

Project:  
Reference number:

Client:  
Client number:  
Contact:

Description	Value
<b>General information:</b>	
Product name:	TPE3 80-40 S-A-G-I-BQQE-CCA
Product No.:	98819908
EAN:	5712601848961 5712601848961
<b>Technical:</b>	
Pump speed on which pump data is based:	1860 rpm
Actual calculated flow:	111 US gpm
Resulting head of the pump:	9.345 ft
Head max:	13.12 ft
Actual impeller diameter:	3.54 in
Code for shaft seal:	BQQE
Curve tolerance:	ISO9906:2012 3B2
Pump version:	A
<b>Materials:</b>	
Pump housing:	Stainless steel ASTM CF8 EN 1.4308
Impeller:	Composite PES/PP 30% GF
Material code:	I
<b>Installation:</b>	
Range of ambient temperature:	-4 .. 122 °F
Maximum operating pressure:	PN 16 bar
Type of connection:	ANSI
Pipe connection:	DN 80
Pressure rating for pipe connection:	PN 16
Flange size for motor:	56C
Connect code:	G
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-13 .. 248 °F
Selected liquid temperature:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Motor type:	71A
IE Efficiency class:	IE5
Rated power - P2:	0.33 HP
Main frequency:	60 Hz
Rated voltage:	3 x 440-480 V
Rated current:	0.8 A
Cos phi - power factor:	0.53
Rated speed:	180-2000 rpm
IE efficiency:	84.8%
Motor efficiency at full load:	84.8 %
Number of poles:	0
Enclosure class (IEC 34-5):	IP55

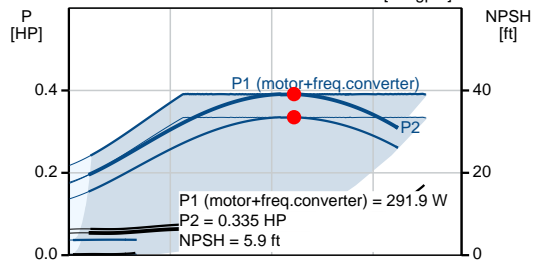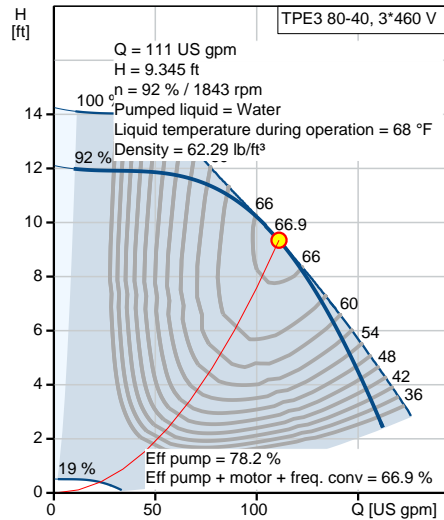



Company name: Hurley Engineering  
Created by:  
Phone:

Date: 2/26/2020

Project:  
Reference number:


Client:  
Client number:  
Contact:

Description	Value
Insulation class (IEC 85):	F
Motor protection:	YES
Motor Number:	99630337
<b>Controls:</b>	
Control panel:	HMI300 - Graphical
Function Module:	FM300 - Advanced
Frequency converter:	Built-in
<b>Others:</b>	
Net weight:	65.9 lb
Gross weight:	85.1 lb
Config. file no:	98484790
Country of origin:	HU
Custom tariff no.:	8413.70.2022

Project:  
Reference number:

Client:  
Client number:  
Contact:

## 98819908 TPE3 80-40 S-A-G-I-BQQE-CCA 60 Hz

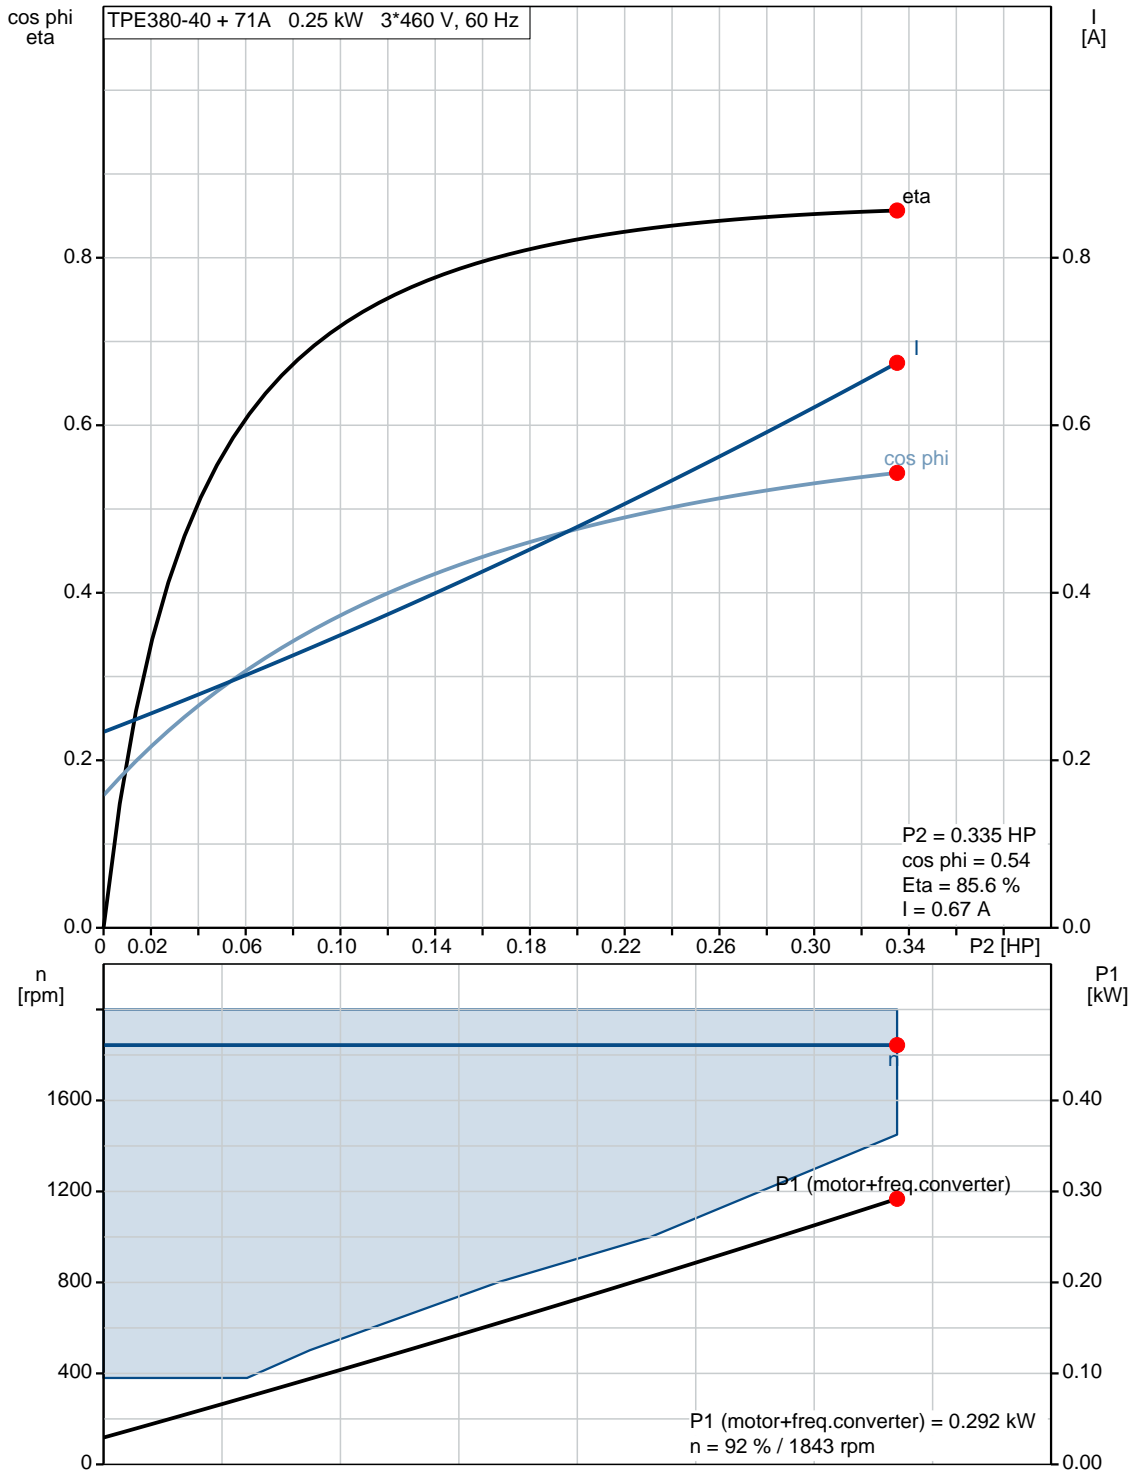






Company name: Hurley Engineering  
Created by:  
Phone:

Date: 2/26/2020

Project:  
Reference number:

Client:  
Client number:  
Contact:

**98819908 TPE3 80-40 S-A-G-I-BQQE-CCA 60 Hz**

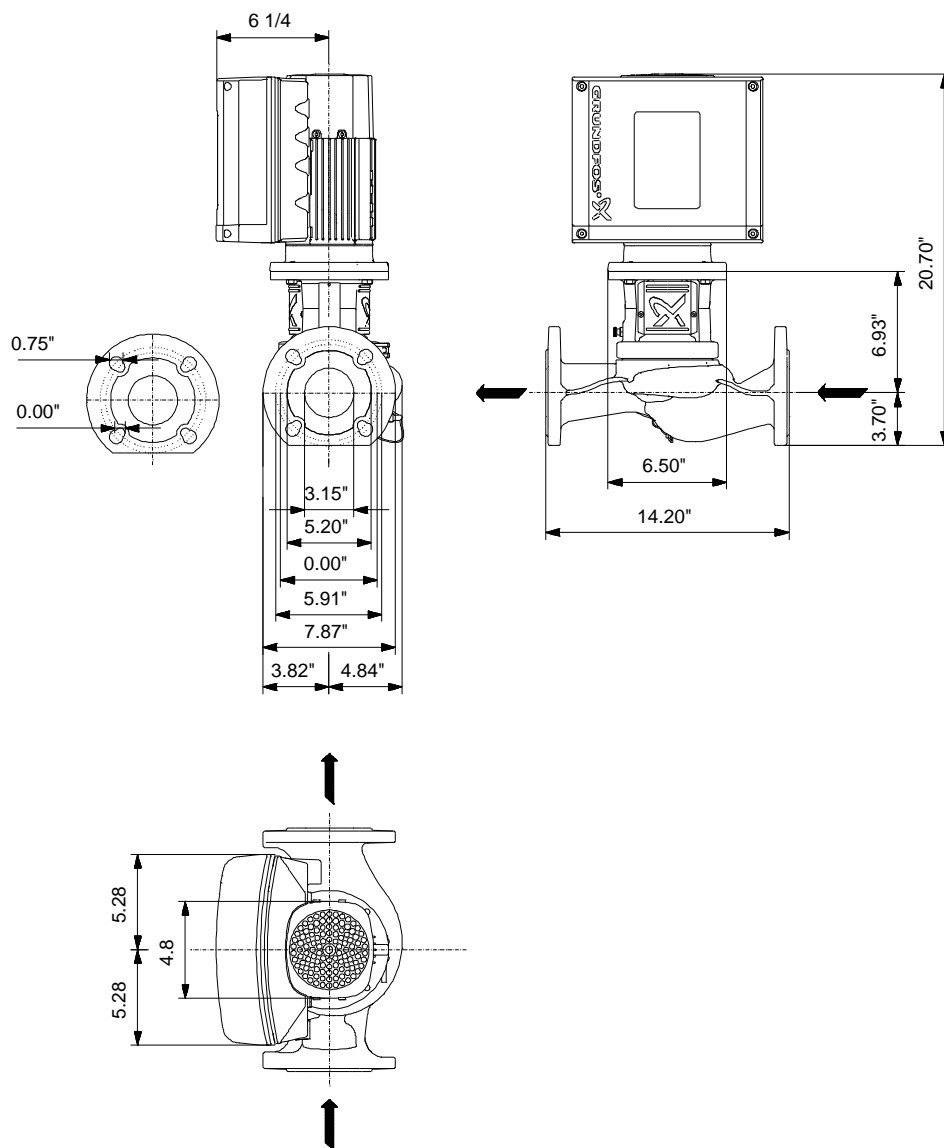


Note! All units are in [in] unless otherwise stated.  
Disclaimer: This simplified dimensional drawing does not show all details.

Project:  
Reference number:

Client:  
Client number:  
Contact:

## 98819908 TPE3 80-40 S-A-G-I-BQQE-CCA 60 Hz

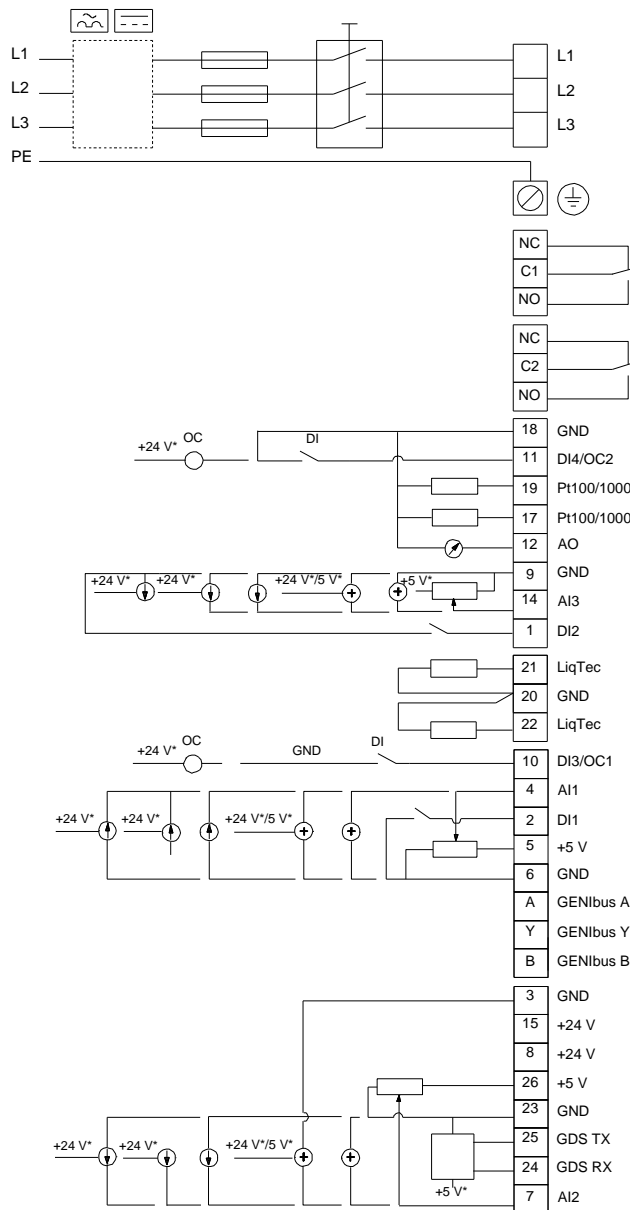

All units are [in] unless otherwise presented.



**Company name:** Hurley Engineering  
**Created by:**  
**Phone:**

**Date:** 2/26/2020

**Project:**  
**Reference number:**

**Client:**  
**Client number:**  
**Contact:**

---

**Order Data:**

Product name: TPE3 80-40 S-A-G-I-BQQE-CCA  
Amount: 1  
Product No.: 98819908

Total: Price on request

---