


Pump Performance Datasheet

Customer	:	Quote Number / ID	: 1141840
Customer ref. / PO	:	Model	: 15959-2P-20HP LCSE
Tag Number	: Hurley Engineering	Stages	: 1
Service	: HYDRONIC	Based on curve number	: RC9846-SS-7.26 Rev 0
Quantity	: 1	Basic model number	: -
		Date last saved	: 03/29/2020 11:29 PM

Operating Conditions		Liquid	
Flow, rated	: 232.5 USgpm	Liquid type	: Cold Water
Differential head / pressure, rated (requested)	: 195.1 ft	Additional liquid description	:
Differential head / pressure, rated (actual)	: 195.1 ft	Solids diameter, max	: 0.00 in
Suction pressure, rated / max	: 0.00 / 0.00 psi.g	Solids concentration, by volume	: 0.00 %
NPSH available, rated	: Ample	Temperature, max	: 68.00 deg F
Frequency	: 60 Hz	Fluid density, rated / max	: 1.000 / 1.000 SG
Performance		Viscosity, rated	: 1.00 cP
Speed, rated	: 3550 rpm	Vapor pressure, rated	: 0.34 psi.a
Speed, maximum	: 3550 rpm	Material	
Speed, minimum	: 900 rpm	Material selected	: Cast Iron
Impeller diameter, rated	: 7.26 in	Pressure Data	
Efficiency	: 71.07 %	Maximum working pressure	: 99.01 psi.g
NPSH required / margin required	: 19.25 / 0.00 ft	Maximum allowable working pressure	: 175.0 psi.g
nq (imp. eye flow) / S (imp. eye flow)	: 20 / 114 Metric units	Maximum allowable suction pressure	: 175.0 psi.g
MCSF	: 103.0 USgpm	Hydrostatic test pressure	: 263.0 psi.g
Head maximum, rated speed	: 228.8 ft	Driver & Power Data (@Max density)	
Head rise to shutoff	: 14.37 %	Motor sizing specification	: Max power (non-overloading)
Flow, best eff. point	: 232.5 USgpm	Margin over specification	: 0.00 %
Flow ratio, rated / BEP	: 100.00 %	Service factor	: 1.00 (used)
Speed ratio (rated / max)	: 100.00 %	Power, hydraulic	: 11.45 hp
Head ratio (rated speed / max speed)	: 100.00 %	Rated power (based on duty point)	: 16.12 hp
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00	Max power (non-overloading)	: 19.97 hp
Selection status	: Acceptable	Nameplate motor rating	: 30.00 hp / 22.37 kW (Fixed)
Energy Indexes			
PEI (VL)	: 0.51		
ER (VL)	: 49		

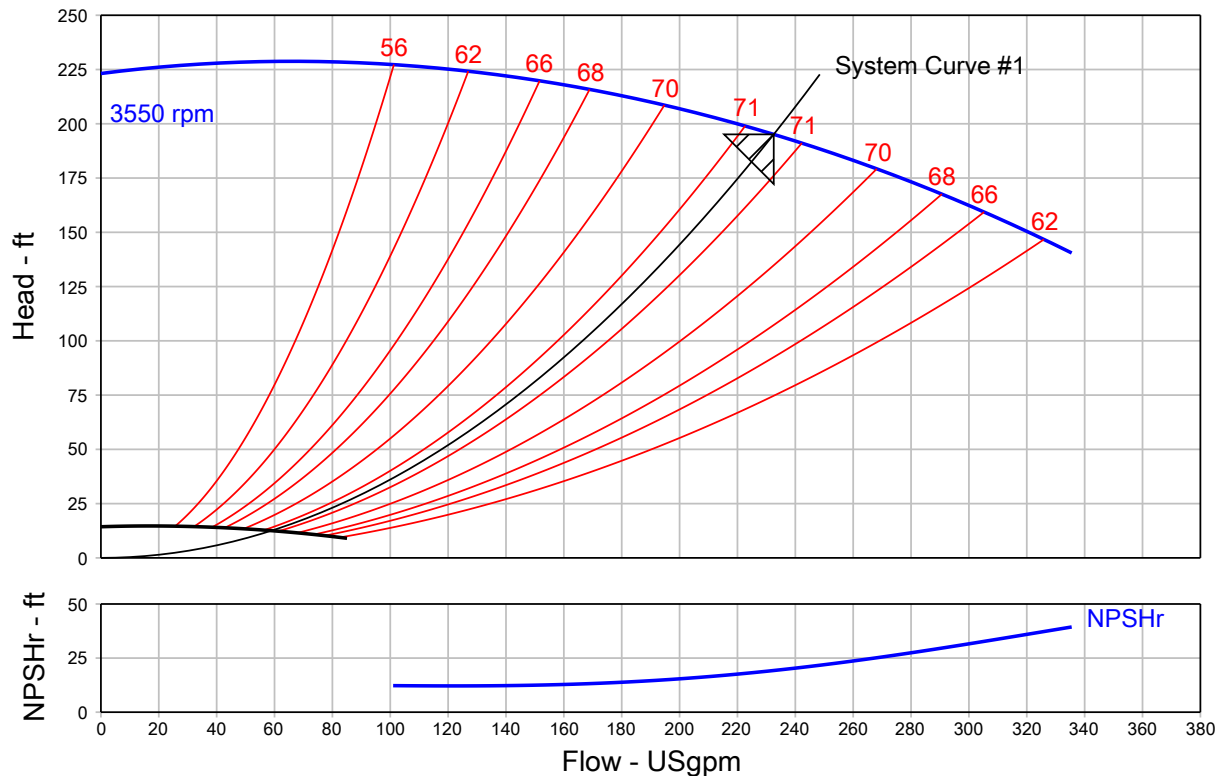

Grundfos Series LCSE - Split Coupled End Suction Pump with Integrated VFD


QUOTE NUMBER / ID 1141840	UNIT TAG Hurley Engineering	QUANTITY 1
	SERVICE HYDRONIC	
REPRESENTATIVE	SUBMITTED BY	DATE
ENGINEER	APPROVED BY	DATE
CONTRACTOR	ORDER #	DATE



LCSE 15959-2P-20HP
3550 rpm

Part Number N/A

Conditions of Service		Pump Data		Motor Data	
Flow	232.5 USgpm	Impeller Diameter	-1.00 in	Motor HP	30 HP
Head	195.1 ft	Efficiency	71.07 %	BHP	16.12
Liquid	Cold Water	Suction	in.	Enclosure	TEFC
Temperature	68.00 deg F	Discharge	in.	Voltage	460 V
NPSHr	19.25 ft	PEI (VL)	0.51	Phase	3 Phase
Viscosity	1.00 cP	ER (VL)	49	Cycle	60
Specific Gravity	1.000 SG			Frame Size	

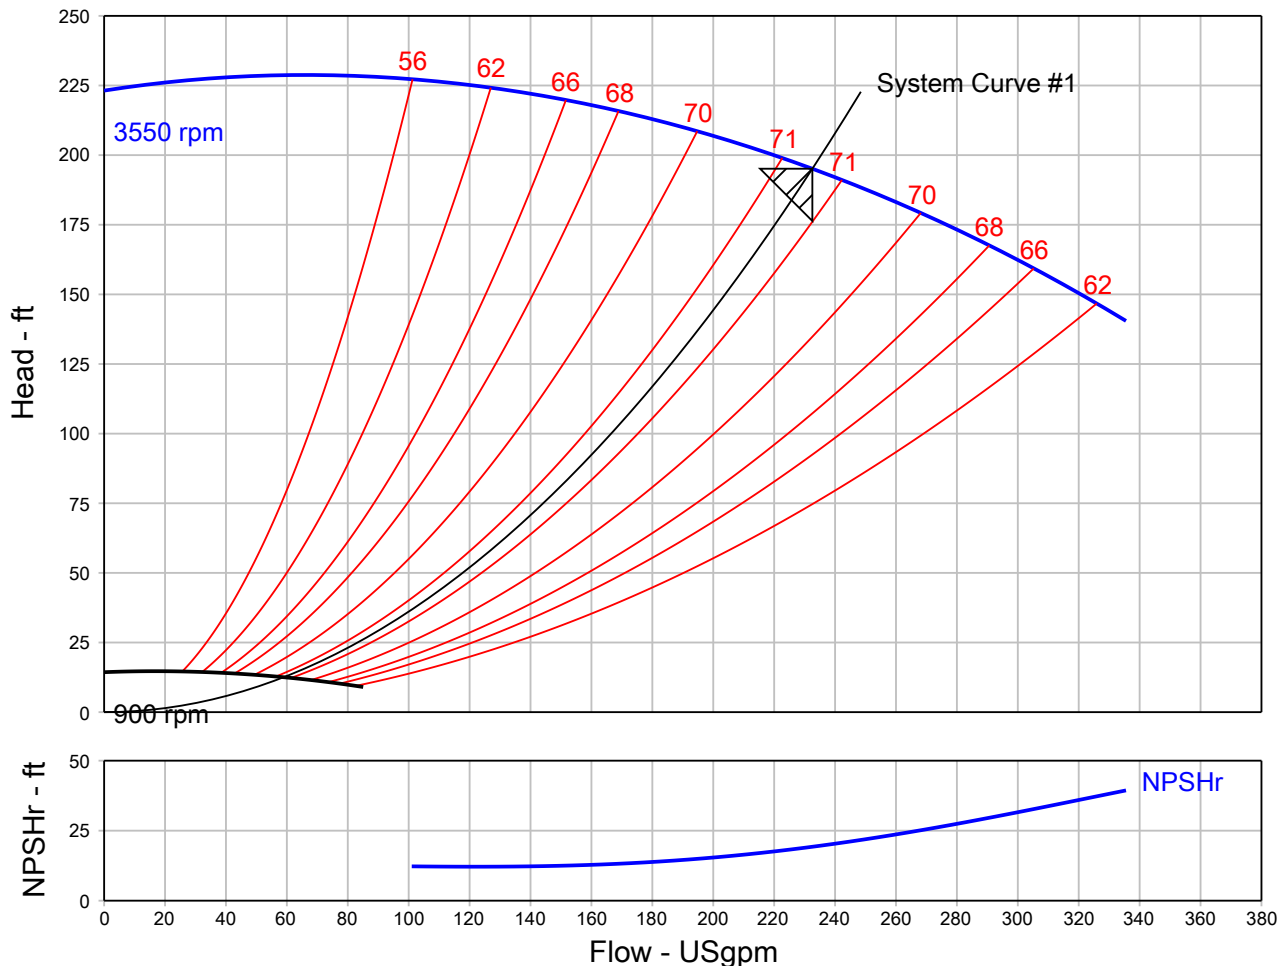



QUOTE NUMBER / ID 1141840

UNIT TAG Hurley Engineering

LCSE 15959-2P-20HP

Grundfos Series LCSE - Split Coupled End Suction Pump with Integrated VFD

NOT FOR CONSTRUCTION, unless certified and referenced on order

Units	Frame	Suct	Disch	CP	DD	HA	HB	HD	HE	HF	HG	HH	HJ	HL	HP	X	Y	Z
inches		0	0	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00


Grundfos Series LCSE - Split Coupled End Suction Pump with Integrated VFD

QUOTE NUMBER / ID 1141840	UNIT TAG Hurley Engineering	LCSE 15959-2P-20HP
---------------------------	-----------------------------	--------------------

MATERIALS OF CONSTRUCTION			
PART	MATERIAL	PART	MATERIAL
Rotation Options	Clockwise	Impeller Washer	S.S., AISI-303
Base/Stand Type	Steel Base / Cast Iron	Impeller Key	Steel, AISI 1045
Bushing	Vesconite	Coupling Options	Rigid Aluminum Axially Split Coupling
Wear Ring Material	Vesconite	Pump Coatings	Standard Paint
Seal Type	Type 21	Seal Material	Ceramic/Carbon/Buna
O-Rings	Buna N	Casing	Cast Iron, ASTM-A48, CL 30
Backplate/Seal Plate	Cast Iron, ASTM-A48, CL 30	Seal Flush Options	External Flush, plastic tubing
Gaskets	Vegetable Fiber	Motor Bracket	Cast Iron, ASTM-A48, CL 30
Casing Bolts	Steel, Grade 5	Impeller	Stainless Steel, AISI-304
Impeller Cap Screw	S.S., AISI-303		


* All materials based on STANDARD configuration

Pump Performance Curve

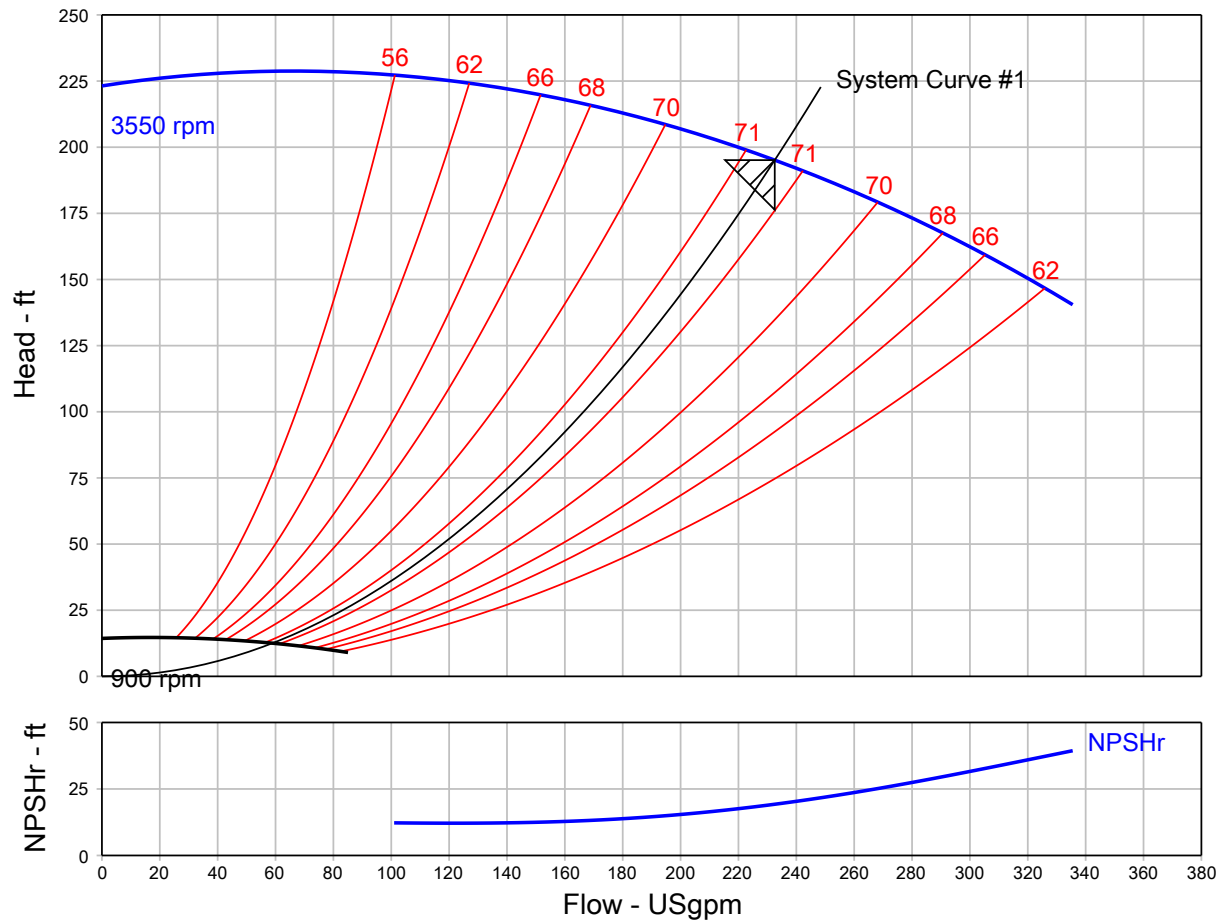


Customer	:	Model	: 15959-2P-20HP LCSE
Customer ref. / PO	:	Stages	: 1
Tag Number	: Hurley Engineering	Speed, rated	: 3550 rpm
Service	: HYDRONIC	Based on curve number	: RC9846-SS-7.26 Rev 0
Quantity	: 1	Efficiency	: 71.07 %
Quote Number / ID	: 1141840	Rated power (based on duty point)	: 16.12 hp
Date last saved	: 03/29/2020 11:29 PM	NPSH required	: 19.25 ft
Flow, rated	: 232.5 USgpm	Viscosity	: 1.00 cP
Differential head / pressure, rated	: 195.1 ft	Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00
Fluid density, rated / max	: 1.000 / 1.000 SG	Impeller diameter, rated	: 7.26 in
		PEI (VL)	: 0.51
		ER (VL)	: 49

Pump Performance Curve

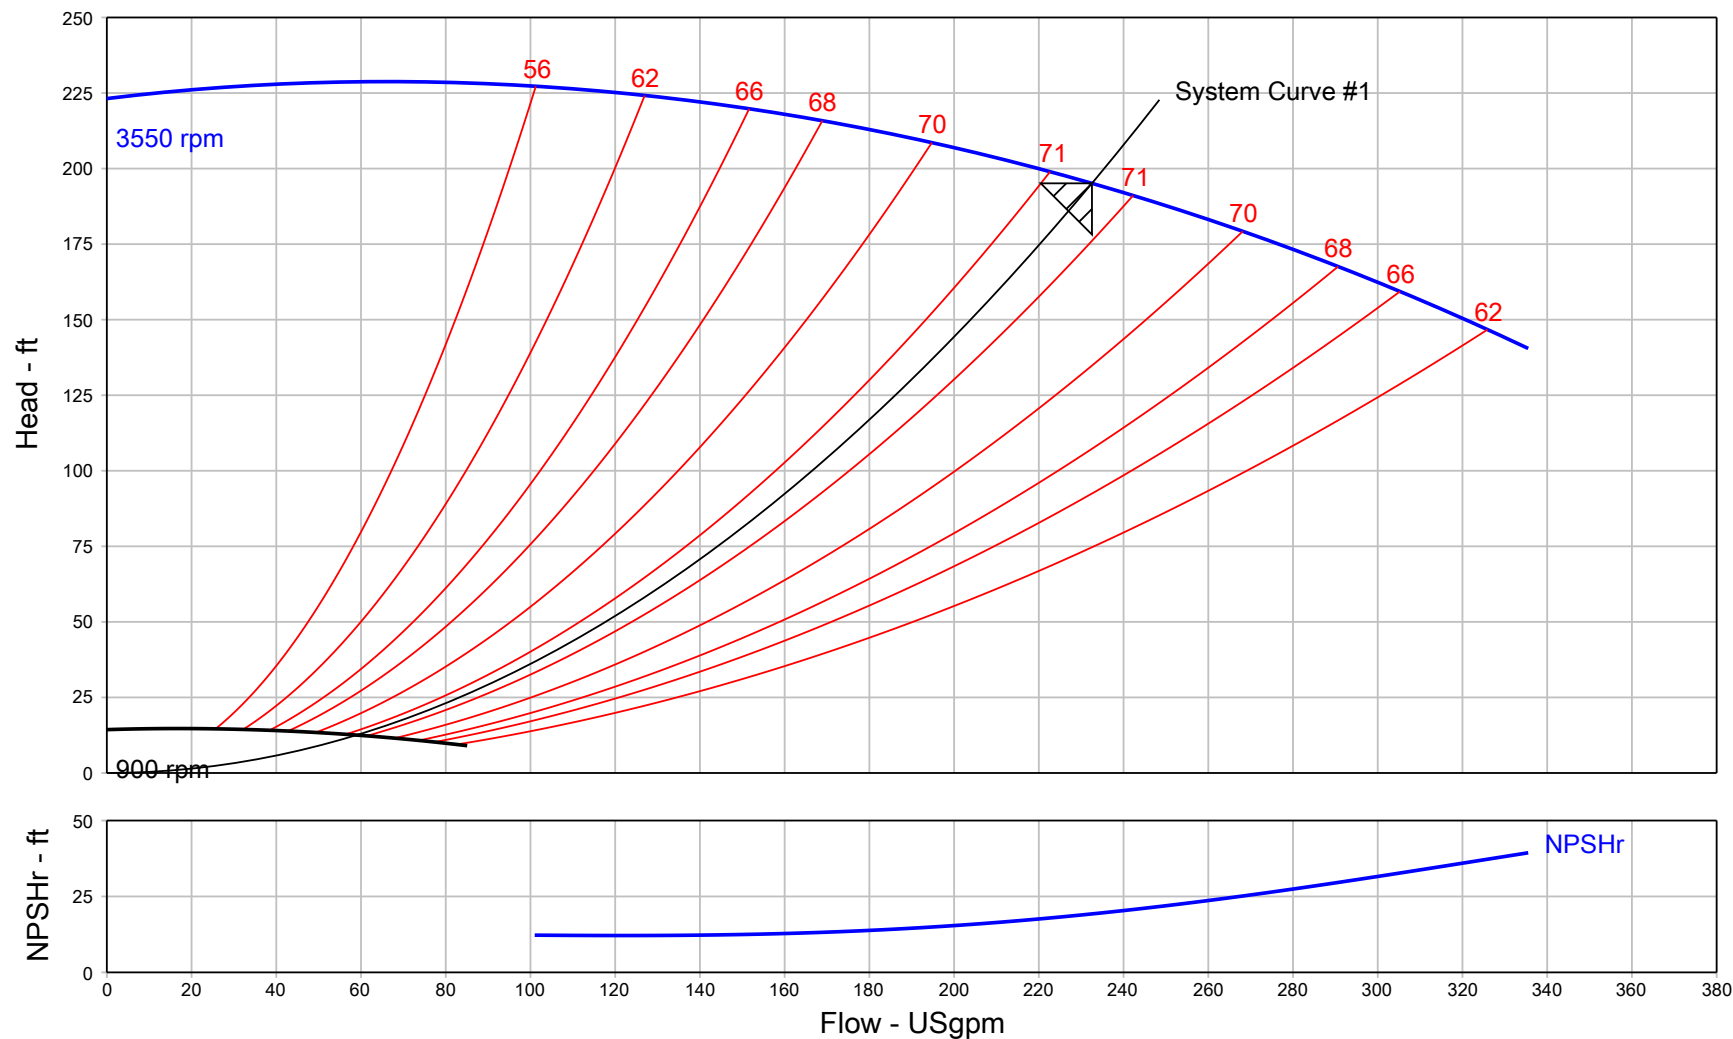

Project name	: LCSE Project NC	Tag Number	: Hurley Engineering	Flow, rated	: 232.5 USgpm
Consulting engineer	:	Service	: HYDRONIC	Differential head / pressure, rated	: 195.1 ft
Customer	:	Model	: 15959-2P-20HP LCSE	Rated power (based on duty point)	: 16.12 hp
Customer ref. / PO	:	Quantity	: 1	Max power (non-overloading)	: 19.97 hp
Quote Number / ID	: 1141840	Quoted By (Sales Office)	: HURLEY ENGINEERING COMPANY	Efficiency	: 71.07 %
Date last saved	: 03/29/2020 11:29 PM	Quoted By (Sales Engineer)	: Steven Leingang	Impeller diameter, rated	: 7.26 in
Based on curve number	: RC9846-SS-7.26 Rev 0	Stages	: 1	PEI (VL)	: 0.51
		Speed, rated	: 3550 rpm	ER (VL)	: 49

Multi-Speed Performance Curve

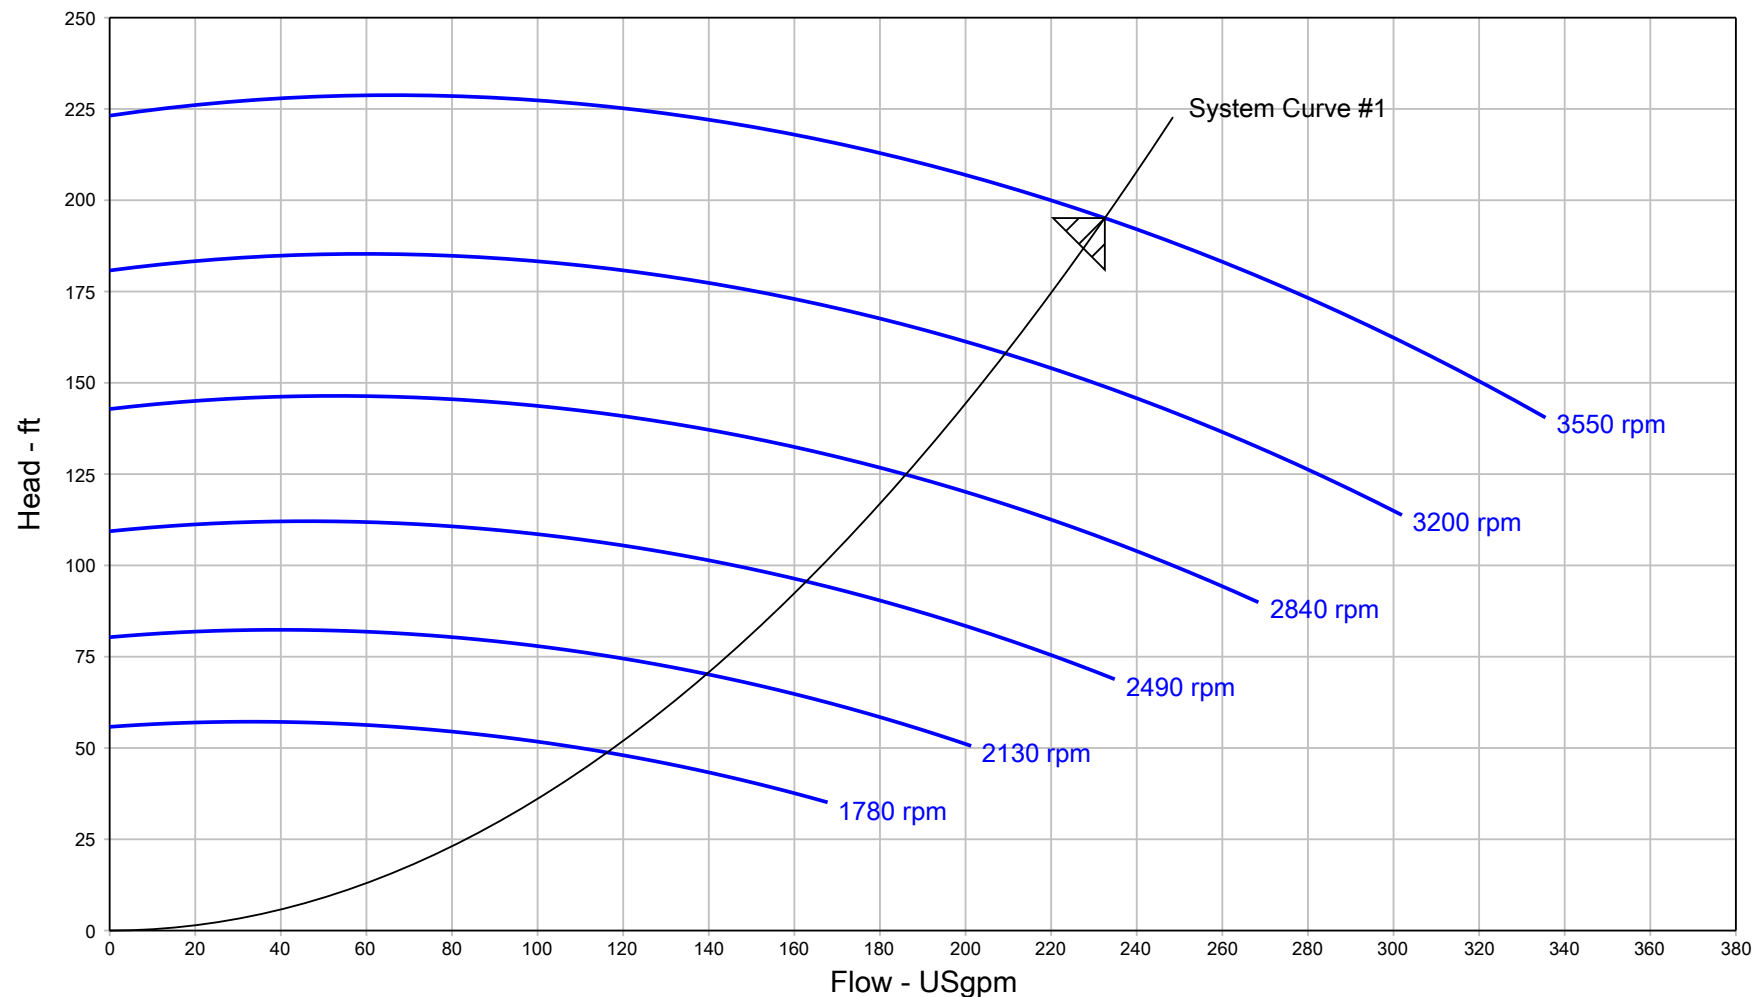

Project name	: LCSE Project NC	Tag Number	: Hurley Engineering	Speed, rated	: 3550 rpm
Consulting engineer	:	Service	: HYDRONIC	Flow, rated	: 232.5 USgpm
Customer	:	Model	: 15959-2P-20HP LCSE	Differential head / pressure, rated	: 195.1 ft
Customer ref. / PO	:	Quantity	: 1	Fluid density, rated / max	: 1.000 / 1.000 SG
Quote Number / ID	: 1141840	Quoted By (Sales Office)	: HURLEY ENGINEERING COMPANY	Viscosity	: 1.00 cP
Date last saved	: 03/29/2020 11:29 PM	Quoted By (Sales Engineer)	: Steven Leingang	Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00
		Stages	: 1	Based on curve number	: RC9846-SS-7.26 Rev 0

Construction Datasheet

Project name : LCSE Project NC				Tag Number : Hurley Engineering	
Consulting engineer :				Service : HYDRONIC	
Customer : HURLEY ENGINEERING COMPANY				Model : 15959-2P-20HP LCSE	
Customer ref. / PO :				Quantity : 1	
Quote Number / ID : 1141840				Quoted By (Sales Office) : HURLEY ENGINEERING COMPANY	
Date last saved : 03/29/2020 11:29 PM				Quoted By (Sales Engineer) : Steven Leingang	
Construction				Motor Information	
Nozzle	Size (in.)	Nozzle Configuration	Pos'n	Manufacturer : Grundfos MLE	
Suction	2	NPS	-	Frame Size : 286TSC	
Discharge	1.5	NPS	-	Power : 30.00 hp	
Orientation / Configuration : Horizontal				RPM : 3600 rpm	
Rotation : Clockwise				Enclosure : TEFC	
Wear Ring Configuration : Single - Case				Operating Power Supply : 460/3/60	
Discharge Elbow Size : -				Efficiency : Premium	
Subplate : -				Service factor : 1.15	
Sump Depth (feet) : -				Motor Application : Suitable for Variable Speed Drive	
Bearing Frame : -				Motor Options/Accessories : -	
Bearing Frame Foot : -				Cord Length (feet) : -	
Bearing Type (Radial/Thrust) : -				Materials	
Bearing Lubrication : -				Case : Cast Iron, ASTM A48 - Class 30	
Thrust Bearing : -				Motor Bracket : Cast Iron, ASTM-A48, CL 30	
Intermediate Bearing : -				Impeller : Stainless Steel, AISI-304 (H304)	
Lower Bearing : -				Impeller Cap Screw and Washer : Stainless Steel, AISI-303	
Bearing Housing Accessories : -				Impeller Key : Stainless Steel, AISI 316	
PACO Construction code : 24-15959-14036A-25K1MS1				Case wear ring : Vesconite	
Baseplate, Coupling and Guard				Impeller wear ring : -	
Baseplate : Welded Steel Fabrication				Pump Shaft : Stainless Steel, AISI-303	
Drip Pan : No drip pan				Sleeve : -	
Coupling : Rigid, Axial Split Coupling (aluminum) RASC3				Line Shaft : -	
Guard : OSHA Approved				Column : -	
Seal & Packing Construction				Discharge Pipe : -	
Sealing Method : Single Seal, Type 21				Discharge Elbow : -	
Seal Material : Buna Carbon Ceramic SS-Spring and Hardware				Suction Elbow : -	
Packing Gland : -				Subplate : -	
Lantern Ring : -				Hardware : Steel, Grade 5	
Recirculation Lines : Nylon Tubing with Brass Fittings				O Rings : Buna N	
Weights (Approx.)				Pump Coatings : Standard Manufacturer's Paint	
Pump : 70.00 lb					
Baseplate : 0.00 lb					
Driver : 366.0 lb					
Estimated Shipping gross weight : 436.0 lb					

General Arrangement

Project name	: LCSE Project NC	Tag Number	: Hurley Engineering
Consulting engineer	:	Service	: HYDRONIC
Customer	: HURLEY ENGINEERING COMPANY	Model	: 15959-2P-20HP LCSE
Customer ref. / PO	:	Quantity of pumps	: 1
Quote Number / ID	: 1141840	Quoted By (Sales Office)	: HURLEY ENGINEERING COMPANY
Date last saved	: 03/29/2020 11:29 PM	Quoted By (Sales Engineer)	: Steven Leingang

NOT FOR CONSTRUCTION, Unless certified and referenced on order

Units	Frame	Suct(in)	Disch(in)	CP	DD	HA	HB	HD	HE	HF	HG	HH	HJ	HL	HP	X	Y	Z	Weight ea
inches	286TSC	2	1.5	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00	436.0

Conditions of Service				Motor Data					
Flow: 232.5 USgpm	Fluid: Cold Water	HP: 30	Encl: TEFC	Phase: 3	Efficiency: Premium				
TDH: 195.1 ft	Temp.: 68.00 deg F	RPM: 3550 rpm	Hz: 60	Voltage: 460	S.F.: 1.15				