



MIRO-CCG

ROOFTOP SUPPORTS




4-DSA

adjustable height from 8" min. - 20" max.,
and span from 10" min. - 14 1/8" max.



6-DSA

adjustable height from 10" min. - 24" max.,
and span from 16" min. - 22" max.

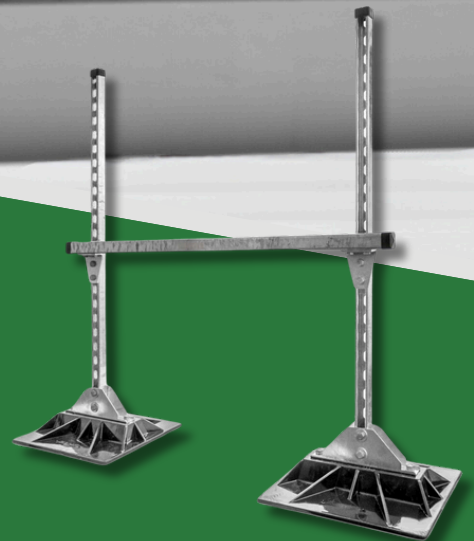

8-DSA

adjustable height from 12" min. - 36" max.,
and span from 18" min. - 40" max.

EASY-TO-INSTALL DUCT OR CABLE TRAY WITH MAXIMUM FLEXIBILITY



BASE MATERIAL

Polycarbonate
with carbon black for
UV resistance



FRAME MATERIAL

12 gauge slotted HDG
strut with all required
hardware and brackets



SPACING

Supports
should not exceed
8 ft. on center



WARRANTY

Two-year
limited
warranty



+801-975-8885



844 S. 430 W., HEBER CITY, UT 84032



WWW.MIROIND.COM