



SWEP SXE8AS

SWEP Sealix®¹ is a new BPHE range that feature a protective layer on all inner surfaces of the BPHE, resulting in enhanced behavior in terms of metal leaching, scaling and corrosion while maintaining thermal and hydraulic performance. The SXE8AS combines Sealix® features with excellent heat transfer offering an increased life time solution for water applications. All parts in contact with water are covered by the SiO₂-based layer.

¹ Sealix is a registered trademark in the EU

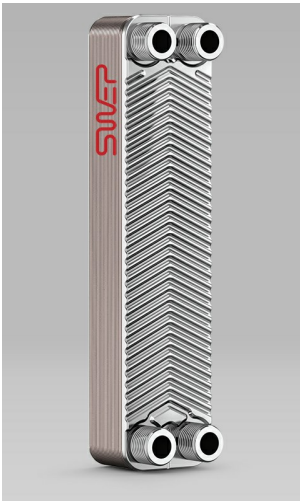


Maximum number of plates (NoP)	42
Max flow	4 m³/h (17.61 gpm)
Channel volume	0.037/0.043 dm³ (0.0013/0.0015 ft³)
Material	316/316L stainless steel plates, copper brazing
Weight excl. connections	0.53+(0.059*NoP) kg 1.17+(0.130*NoP) lb
Max Particle Size (mm)	1

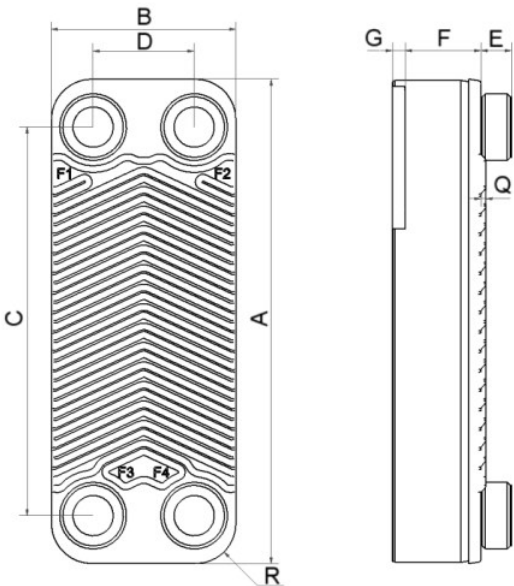

#	MM	IN
A	315	12.4
B	74	2.91
C	278	10.94
D	40	1.57
F	2,20+(2,10*(NoP-2,00))	0.09 (NaN*(NoP-0.08))
G	7	0.28
Q	2	0.08
R	17	0.67
E_1	12	0.47
E_2	20	0.79



Threaded Connection

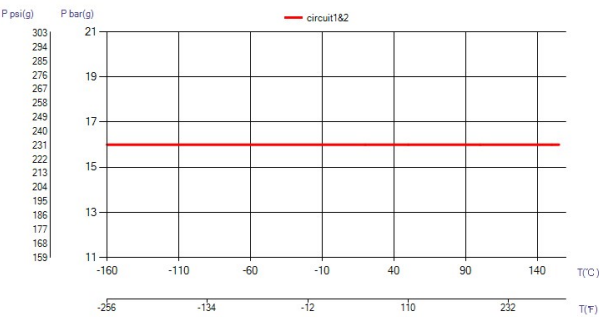

UL Tryck/Temperatur

