

Compac counter flanges

To increase the flexibility for units with standard threaded connections, SWEP offer a range of Compac flange kits. The threaded part is easily assembled to the connections and the counter flange welded to your pipe.

SWEP accessories meet the same high standards as the company's BPHEs. They are produced according to SWEP's specification by rigorously selected suppliers. The high-quality materials are carefully chosen for compatibility, while the accurate dimensions save you time and money on installation. With SWEP accessories you have the assurance that everything will fit and perform the way the design engineers intended.


Standard connections

SWEP counter flanges are used to connect your pipe to our DN compac flanges on the BPHE unit.

For more information, please contact your local SWEP representative.



C		D E		F G			
Technical data *		Size	A (mm)	B (mm)	C (mm)	D (mm)	Ø F (mm)
Max working temperature	200°C	DN20C	10	20	26,9	53	11
Min working temperature	-15°C	DN25C	10	20	33,7	63	13
Max working pressure	40 bar	DN50C	12	24	60,3	91	13
*According properties of SWEP gasket		DN65C	12	24	76,1	106	13
		DN80C	15	30	88,9	118	13
		DN100C	15	30	114,3	144	13
		DN150C	22	44	168,3	217	21
Material options							
Stainless steel	1.4404 alt 1.4571						
Carbon steel	C22.8						

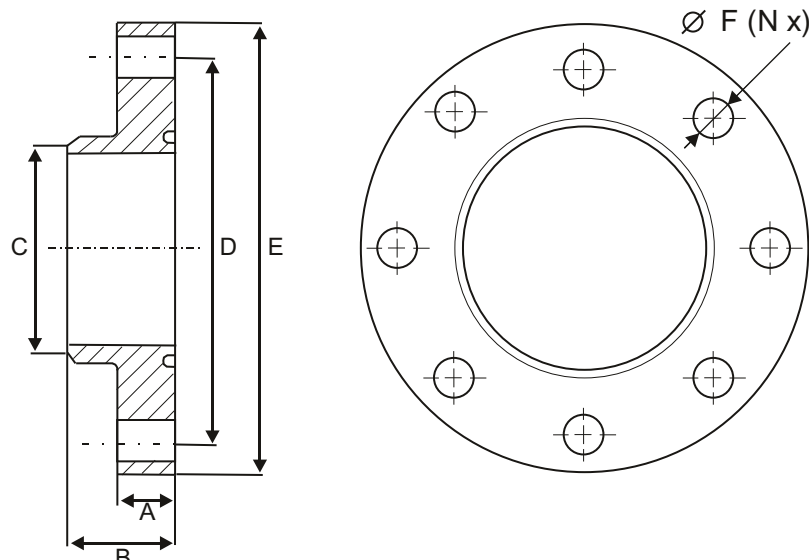

www.swep.net