



Regusol Stations

Simple and safe control
of solar thermal energy.

Our Regusol stations



Stations,
Storage cylinders



Regusol stations

Invest in the sun?

It's easy with our modular solutions.

SOLAR THERMAL ENERGY – CLEVER USE OF THE SUN

Solar thermal systems use the sun's thermal energy to heat potable water or to support the heating system. This makes them *particularly environmentally friendly and energy efficient*. In Central Europe, about 60 to 70 % of the annual hot potable water demand of a detached house can be heated by solar thermal systems. Solar systems for additional heating support cover about 10 to 30 %, in passive houses even up to 100 % of the total heat demand.

If the solar radiation is not sufficient to heat the potable or heating water, another heating system provides the necessary energy. For this purpose, solar thermal systems are combined, for example, with a modern condensing boiler, an efficient heat pump or a regenerative solid fuel boiler.

THIS IS HOW IT WORKS

Solar thermal systems use the *sun's thermal energy via collectors* in which solar fluid is heated by solar radiation. The solar fluid is transported by a high-efficiency pump in the **Regusol** station to the heat exchanger, which transfers the thermal energy to the potable or heating water. The heat exchanger is already integrated in our **Regusol X** stations. Our **Regtronic** solar controllers control the pump particularly efficiently.



Together we *solve the challenges of tomorrow today*. We support you as a partner at your side. With our modular and pioneering system solutions, you are flexible and well positioned for the future. Even if requirements change tomorrow. Our *stations and storage cylinders* are matched to our pioneering hydronic and indoor climate solutions. So that you can plan reliably and systematically.

YOUR BENEFITS



- + *Environmentally friendly* by saving resources and CO₂
- + *Greater independence* from fossil fuels and price increases
- + *Crisis-proof* and therefore value-enhancing for your property

Regusol PH



WITH THESE PUMP CIRCUITS YOU CONNECT A SOLAR CIRCUIT.

The Regusol PH pump circuits enable the solar circuit to be shut off on the return side and prevent self-circulation via an integrated check valve when the pump is switched off.

THE PUMP CIRCUITS CONSIST OF:

- + a *high-efficiency pump*
- + a *ball valve* with integrated check valve and thermometer in the return
- + a *safety group* with safety valve and pressure gauge
- + a *fill and drain cock* and *connection possibility* of an expansion tank
- + a *flow measuring and regulating device* with shutoff and fill and drain cock
- + a *wall mounting device*
- + an *insulation*

Pump circuits



REGUSOL PH-130 DN 25

i	Pump length	130 mm
	Connection solar circuit	G 1 ET for Regusol compression fittings
	Connection storage cylinder circuit	G 1 ET for Regusol compression fittings

Item no.	Version
1362063	with Wilo PARA ST 25-130/7-50/iPWM




REGUSOL PH-180 DN 25

i	Pump length	180 mm
	Connection solar circuit	G 1 ET for Regusol compression fittings
	Connection storage cylinder circuit	G 1 ET for Regusol compression fittings

Item no.	Version
1368163	with Grundfos UPM3 W3 Solar 25-75 PWM

Regusol SH

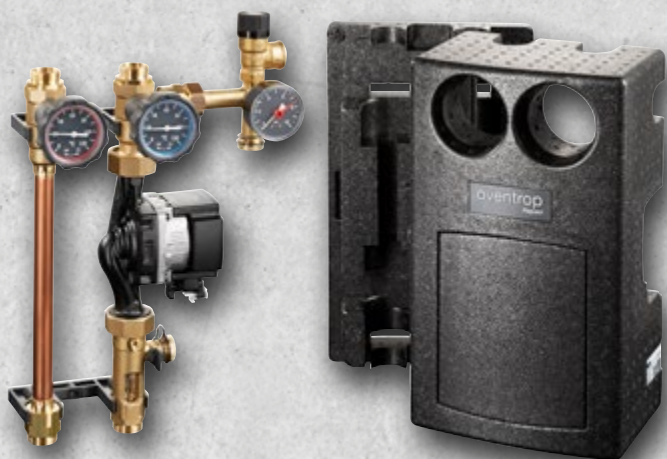

WITH THESE STATIONS YOU CONNECT A SOLAR CIRCUIT.

The Regusol SH stations enable the solar circuit to be shut off on the supply and return side and prevent self-circulation via integrated check valves when the pump is switched off.

THE STATIONS CONSIST OF:

- + a *high-efficiency pump*
- + *ball valves* with integrated check valves and thermometer in the return
- + a *safety group* with safety valve and pressure gauge
- + a *fill and drain cock* and *connection possibility* of an expansion tank
- + a *flow measuring and regulating device* with shutoff and fill and drain cock
- + a *wall mounting device*
- + an *insulation*

Stations



REGUSOL SH-130 DN 20

- i Pump length 130 mm
- Connection solar circuit G ¾ ET with Eurocone
- Connection storage cylinder circuit G ¾ ET with Eurocone

Item no.	Version
1360033	with Grundfos UPM3 Solar 15-75 PWM



REGUSOL SH-130 DN 25

- i Pump length 130 mm
- Connection solar circuit G 1 ET for Regusol compression fittings
- Connection storage cylinder circuit G 1 ET for Regusol compression fittings

Item no.	Version
1360063	with Grundfos UPM3 W3 Solar 25-75 PWM



REGUSOL SH-180 DN 25

- i Pump length 180 mm
- Connection solar circuit G 1 ET for Regusol compression fittings
- Connection storage cylinder circuit G 1 ET for Regusol compression fittings

Item no.	Version
1368064	with Grundfos UPM3 W3 Solar 25-75 PWM



REGUSOL SH-180 DN 32

- i Pump length 180 mm
- Connection solar circuit G 2 ET, flat sealing
- Connection storage cylinder circuit G 2 ET, flat sealing

Item no.	Version
1368251	with Wilo Stratos PARA 30/1-9

Regusol LH




WITH THESE STATIONS YOU CONNECT A SOLAR CIRCUIT.

The Regusol LH stations with vent pot enable the solar circuit to be shut off on the supply and return side and prevent self-circulation via integrated check valves when the pump is switched off. A vent pot enables the degassing of the heat transfer medium in the supply pipe.

THE STATIONS CONSIST OF:

- + a *high-efficiency pump*
- + *ball valves* with integrated check valves and thermometer in the return
- + a *safety group* with safety valve and pressure gauge
- + a *fill and drain cock* and *connection possibility* of an expansion tank
- + a *flow measuring and regulating device* with shutoff and fill and drain cock
- + a *wall mounting device*
- + an *insulation*
- + a *vent pot*

Stations with vent pot



REGUSOL LH-130 DN 20

i	Pump length	130 mm
	Connection solar circuit	G ¾ ET with Eurocone
	Connection storage cylinder circuit	G ¾ ET with Eurocone

Item no.	Version
1360573	with Grundfos UPM3 Solar 15-75 PWM



REGUSOL LH-130 DN 25

i	Pump length	130 mm
	Connection solar circuit	G 1 ET for Regusol compression fittings
	Connection storage cylinder circuit	G 1 ET for Regusol compression fittings

Item no.	Version
1360556	with Grundfos UPM3 W3 Solar 25-75 PWM
1360557	with Wilo PARA ST 25-130/7-50/iPWM
1360558	with Wilo PARA ST 25-130/8-75/iPWM



REGUSOL LH-180 DN 25

i	Pump length	180 mm
	Connection solar circuit	G 1 ET for Regusol compression fittings
	Connection storage cylinder circuit	G 1 ET for Regusol compression fittings

Item no.	Version
1360850	without pump
1360851	with Wilo PARA ST 25-180/7-50/iPWM
1360852	with Wilo PARA ST 25-180/8-75/iPWM
1360853	with Grundfos UPM3 W3 Solar 25-75 PWM
1360854	with Wilo PARA ST 25-180/7-50/iPWM

Regusol ELH



WITH THESE STATIONS YOU CONNECT A SOLAR CIRCUIT.

The Regusol ELH stations with vent pot enable the solar circuit to be shut off on the supply and return side and prevent self-circulation via integrated check valves when the pump is switched off. A vent pot enables the degassing of the heat transfer medium in the supply pipe. The integrated electronic controller takes over the control and monitoring of the solar thermal system.

THE STATIONS CONSIST OF:

- + a *high-efficiency pump*
- + *ball valves* with integrated check valves and thermometer in the return
- + a *safety group* with safety valve and pressure gauge
- + a *fill and drain cock* and *connection possibility* of an expansion tank
- + a *flow measuring and regulating device* with shutoff and fill and drain cock
- + a *wall mounting device*
- + an *insulation*
- + a *vent pot*
- + an *electronic controller*

Stations with electronic controller



REGUSOL LH-130 DN 20

with Regtronic RC electronic controller

- ① Pump length 130 mm
- Connection solar circuit G 1 ET for Regusol compression fittings
- Connection storage cylinder circuit G 1 ET for Regusol compression fittings

Item no.	Version
----------	---------

1366597	with Grundfos UPM3 Solar 15-75 PWM
---------	------------------------------------



REGUSOL ELH-130-RC-P DN 25

with Regtronic RC-P electronic controller

- ① Pump length 130 mm
- Connection solar circuit G 1 ET for Regusol compression fittings
- Connection storage cylinder circuit G 1 ET for Regusol compression fittings

Item no.	Version
----------	---------

1360394	with Wilo PARA ST 25-130/7-50/iPWM
---------	------------------------------------



REGUSOL ELH-180-RC DN 25

with Regtronic RC electronic controller

- ① Pump length 180 mm
- Connection solar circuit G 1 ET for Regusol compression fittings
- Connection storage cylinder circuit G 1 ET for Regusol compression fittings

Item no.	Version
----------	---------

1360862	with Wilo PARA ST 25-180/7-50/iPWM
---------	------------------------------------

1360864	with Wilo PARA ST 25-180/8-75/iPWM
---------	------------------------------------

Regusol X



WITH THESE STATIONS YOU CONNECT A SOLAR CIRCUIT.

The Regusol X stations with heat exchanger enable a controlled transfer of thermal energy from a solar circuit (primary circuit) to a storage cylinder circuit (secondary circuit). The stations enable the solar circuit to be shut off on the supply and return side and prevent self-circulation via integrated check valves when the pump is switched off. The integrated electronic controller takes over the control and monitoring of the solar thermal system.

THE PRIMARY CIRCUIT OF THE STATIONS CONSISTS OF:

- + a *high-efficiency pump*
- + *ball valves* with integrated check valves and thermometers in the supply and return
- + a *safety group* with safety valve and pressure gauge
- + a *fill and drain cock* and *connection possibility* of an expansion tank
- + *connections for flushing, filling and draining*
- + an *electronic volume flow sensor*

THE SECONDARY CIRCUIT OF THE STATIONS CONSISTS OF:

- + a *high-efficiency pump*
- + *ball valves* with integrated thermometers in the supply and return
- + a *check valve*
- + a *safety valve*
- + a *vent valve* and a *connection for filling, flushing and draining*

THE STATIONS ARE ADDITIONALLY EQUIPPED WITH:

- + a *plate heat exchanger*
- + a *wall mounting device*
- + an *insulation*
- + an *electronic controller*

Stations with heat exchanger



REGUSOL X-UNO DN 25 WITH ONE STORAGE CYLINDER CIRCUIT CONNECTION

	Pump length	130 mm
	Connection solar circuit	G 1 ET for Regusol compression fittings
	Connection storage cylinder circuit	G 1 ET for Regusol compression fittings

Item no.	Version
1361060	with Wilo PARA ST 15-130/7-50/iPWM2-6 (collector circuit) and Wilo PARA 15-130/7-50/iPWM2-6 (storage cylinder circuit)



REGUSOL X-DUO DN 25 WITH TWO STORAGE CYLINDER CIRCUIT CONNECTIONS

	Pump length	130 mm
	Connection solar circuit	G 1 ET for Regusol compression fittings
	Connection storage cylinder circuit	G 1 ET for Regusol compression fittings

Item no.	Version
1361050	with Wilo PARA ST 15-130/7-50/iPWM2-6 (collector circuit) and Wilo PARA 15-130/7-50/iPWM2-6 (storage cylinder circuit)

Modular accessories

Clever combination



+ Regusol FSA
fill and flush device



+ Regusol
refill pump



+ HydroControl STR
double regulating valve



+ Regusol X
supplementary set



+ Hydrocor HP
buffer storage cylinder



+ Regumaq X-25
fresh water station



+ Regumaq X-45
fresh water station



+ Regumaq X-80
fresh water station



+ Regtronic RC
solar controller



+ Regtronic RC-P
solar controller



+ Regtronic RM
multifunction controller

Regtronic

Electronic Controllers



MAKE SYSTEMS PARTICULARLY EFFICIENT AND ECONOMICAL

Our Regtronic controllers make your Regusol station *particularly efficient*, as they optimally control the circulation pump – depending on the temperature difference between the collector and the storage cylinder. By coordinating different heat generators – such as solar thermal energy with gas boilers or a solid fuel boiler – the Regtronic controllers ensure *particularly economical operation* of the system.

In addition, the Regtronic controllers enable the *control, merging and monitoring* of various functions from the areas of energy generation, distribution and transfer to an intelligent building system.



REGTRONIC RC

Item no. 1369549

Simple solar controller for controlling a solar plant



REGTRONIC RC-P

Item no. 1369551

Flexible solar controller for complex solar systems, hot potable water preparation and additional functions



REGTRONIC RM

Item no. 1369555

Multifunction controller for the control of weather-compensated mixed / unmixed heating circuits as well as solar plants



Room climate



Hydronics



Stations,
Storage cylinders



Potable water



Oil



Smart Home,
Smart Building

Oventrop is the partner for efficient heating, cooling and clean potable water. The modular systems and services offer pioneering solutions which all HVAC experts use to work with – easily and flexibly – from planning to installation, from industry to trade. As a family business, Oventrop accompanies all its partners over many years – competently and personally.